

INTARCO

REFRIGERATION UNITS COMMERCIAL RANGE



Price list
2023

INTARCON, is a Spain-based company dedicated to designing, manufacturing, marketing and servicing a full range of refrigeration equipment for commercial and industrial sectors.

Our mission at INTARCON is to develop and offer the market a wide range of innovative solutions for the most reliable, efficient and sustainable operation of refrigeration facilities.

The INTARCON team has over 30 years of valuable experience in the fields of refrigeration, air conditioning and related thermal appliances, focusing our effort on the creation and development of a wide range of innovative refrigeration solutions.



LOYOLA UNIVERSITY
SPAIN



AMARANDE HOTEL
CYPRUS




WALMART-LIDER
CHILE



DATA CENTER
UNITED KINGDOM



WINE CELLAR
SPAIN



CATERING SCHOOL
IBIZA, SPAIN




PACIFICA SALUD HOSPITAL
PANAMA



SAN ANTON MARKET
SPAIN



CARREFOUR
DOMINICAN REPUBLIC

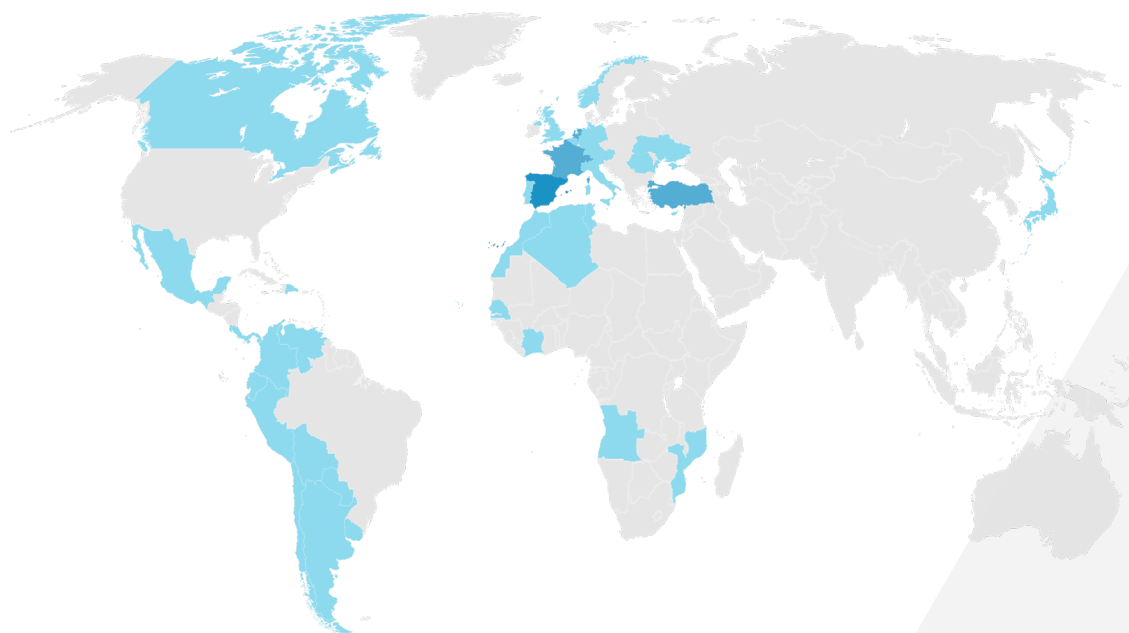

more than
55 000
supplied units

at more than
50
countries

with more than
250
employees

RELIABILITY EFFICIENCY SUSTAINABILITY

Technology

Engineering excellence is in our corporate DNA. Our innovative strategy combines technology development based on well-known solutions, with innovative projects in new technologies.

Team

The commitment, know-how and experience of our employees is our greatest strength, with more than 25 % of our staff being university trained engineer, which makes us a highly technological company.

Markets and clients

Present on five continents and with subsidiaries in the Netherlands, Turkey, France and Switzerland, we develop and promote the dissemination of knowledge to create and reinvent markets through a strong focus on the customer and their needs.

Service

With a great technical capacity and a high knowledge of refrigeration systems and installations, we give international and national customer service.


Quality and environment

We supply products that exceed our customer's expectations, developing environmentally friendly products with optimal management of production waste.

Production capacity

Adaptive flexibility in the manufacture of different products contributes to our customer service. Our factory is located in Lucena, in the south of Spain, with a total surface area of 12 000 m².



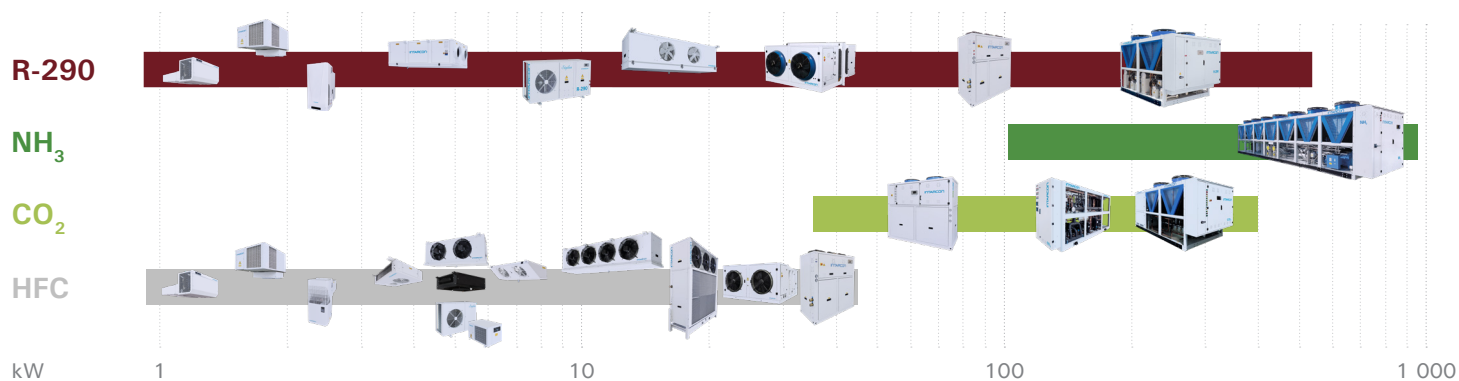

Commercial monoblocks



- * Monoblock for small and medium sized cold rooms.
- * Easy Plug & Play installation directly on the ceiling, door or wall of the cold room.
- * Natural refrigerant R-290.



Commercial split systems

- * Split system for small and medium sized cold rooms.
- * Refrigerant pre-load and exempt from leak checks.
- * R-134a and R-449A refrigerant with low greenhouse effect.
- * Low noise units and axial or centrifugal condensing units.



Condensing units

- * Tropicalised design, low noise and centrifugal fan.
- * Ecodesign certification.
- * Electronic and multiservice controller versions.



Footprint condensing units up to 40 kW

- * Very compact refrigeration plants for commercial refrigeration.
- * Low investment and maintenance costs.
- * Plug & Play installation in new or existing installations.
- * A2L approved version. Available with R-454C refrigerant (GWP < 150).



Industrial condensing units

- * High cooling capacity for industrial applications.
- * Low refrigerant charge.
- * High service accessibility.



Industrial monoblock



- * Scroll compressors.
- * High, medium and negative temperature.
- * Easy wall installation.
- * Tropicalised design for ambient temperature up to 45 °C.
- * Natural refrigerant R-290.



Evaporating units and air coolers



- ❄ Expansion and solenoid valves as standard.
- ❄ Optimised designs for R-134a, R-449A and glycol.
- ❄ High, medium, negative temperature and deep-freezing.

intarSANIT



- ❄ Air purification and sterilization in workrooms.
- ❄ High efficiency filtration units.
- ❄ Air renewal units with active cold recovery.

Waterloop system



- ❄ R-290 water condensed motor evaporators.
- ❄ Air-coolers with hydraulic group.
- ❄ Water condensed units up to 50 °C.

HFC chillers



- ❄ Low refrigerant charge.
- ❄ Plug & Play.
- ❄ Optimised compact system, with minimum maintenance.

Glycol chillers R-290



- ❄ Operation with glycol water and reduced R-290 refrigerant charge.
- ❄ Scroll and semihermetic compressors.
- ❄ FULL INVERTER available models.

CO₂ system from 30 up to 100 kW



- ❄ Condensing units with axial or centrifugal gas cooler or centrifugal.
- ❄ Trio of positive temperature compressors and duo of negative temperature compressors.
- ❄ High performance with parallel compression.

NH₃ chillers ammolute



- ❄ Low charge ammonia technology.
- ❄ Dry expansion systems.
- ❄ Air-cooled chillers.

Direct expansion of NH₃ ammolute



- ❄ Low charge ammonia technology.
- ❄ No need for an engine room.
- ❄ On-site maintenance of the compressor.



Headquarters

Lucena (Córdoba) Spain
+34 957 50 92 93

International sales

commercial@intarcon.com

Service

service@intarcon.com

Europe | europe@intarcon.com

Austria | osterreich@intarcon.com

Belgium | belgique@intarcon.com

France | france@intarcon.com

Germany | deutschland@intarcon.com

Ireland | ireland@intarcon.com

Italy | italy@intarcon.com

Netherlands | kantor@intarcon.com

Norway | norway@intarcon.com

Portugal | portugal@intarcon.com

Romania | romania@intarcon.com

Spain | comercial@intarcon.com

Sweden | sweden@intarcon.com

Switzerland | suisse@intarcon.com

Turkey | turkiye@intarcon.com

United Kingdom | uk@intarcon.com

America | latam@intarcon.com

Argentina | argentina@intarcon.com

Bolivia | bolivia@intarcon.com

Canada | canada@intarcon.com

Chile | chile@intarcon.com

Colombia | colombia@intarcon.com

Costa Rica | costarica@intarcon.com

Dominican Rep. | repdominicana@intarcon.com

Ecuador | ecuador@intarcon.com

Mexico | mexico@intarcon.com

Panama | panama@intarcon.com

Paraguay | paraguay@intarcon.com

Peru | peru@intarcon.com

Uruguay | uruguay@intarcon.com

Venezuela | venezuela@intarcon.com

Africa | africa@intarcon.com

Algeria | algerie@intarcon.com

Angola | angola@intarcon.com

Equatorial Africa | afrique.equatoriale@intarcon.com

Cape Verde | caboverde@intarcon.com


Ivory Coast | cotedivoire@intarcon.com

Morocco | maroc@intarcon.com

Mozambique | mozambique@intarcon.com

Tunisia | tunisia@intarcon.com

“ Maximum quality
in our products and
excellence in our
services ”

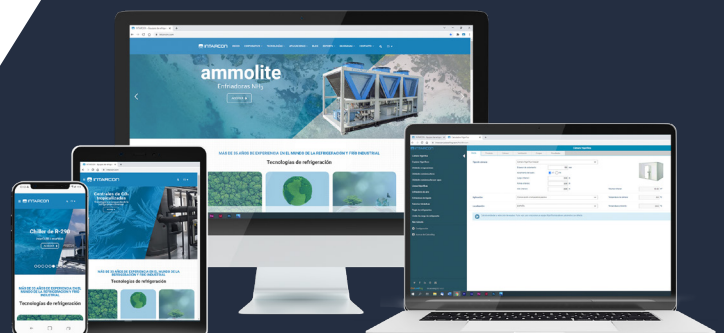

www.intarcon.com



PRODUCT CODIFICATION

INTARCON units are identified unequivocally according to the following criteria in their nomenclature:

	SERIE	VERSION	MODEL
	M S H	- C Q G	- 40 054
Application			
Positive temperature	M		
Negative temperature	B		
High temperature	A		
High relative humidity	H		
Wine cellar	V		
Dry-cooler	C		
Configuration			
Compact	C		
Split system	S		
Condensing unit	D		
Chiller	W		
Structure			
Vertical	V		
Roof-top	R		
Door	P		
Horizontal	H		
Low noise	F		
Wall-type	M		
Double flow	D		
Commercial cubic-type	C		
Version			
Axial condensation		N	
Centrifugal condensation		C	
Water condensation		H	
Weatherproof		I	
Ultra-slim		L	
Cubic-type evaporator		Q	
Double flow evaporator		D	
Quasi-static evaporator		U	
Wine cellar evaporator		G	
Scroll compressor, axial condensation		S	
Scroll compressor, centrifugal condensation		SC	
Rotary compressor		P	
VRC system, axial condensation		V	
VRC system, centrifugal condensation		CV	
Refrigerant			
R-134a		Y	
R-290		D	
R-449A		G	
R-452A		B	
Model			
Construction size			
Compressor capacity			

INDEX

Commercial range	5
Sales network	6
Product codification	7
Cold room calculation	8
Cooling calculator	8
MONOBLOCKS	9
MCP -N / BCP -N	11
MCR -N / BCR -N	13
MCR -C / BCR -C	13
MCV -LD / BCV -LD	15
MCV -N / BCV -N	17
MCV -C / BCV -C	17
MCV -I / BCV -I	18
SPLIT SYSTEMS	19
Horizontal, axial and centrifugal	
MSH -N / BSH -N	21
MSH -C / BSH -C	21
MSH -Q / BSH -Q	22
MSH -CQ / BSH -CQ	22
ASH -D	23
ASH -CD	23
Low noise	
MSF -N / BSF -N	25
MSF -Q / BSF -Q	26
ASF -D	27
Meat units	
MSF -U	29
MSH -CU	29
High relative humidity	
HSF -D	31
HSH -CD	31
Wine cellar units	
VSF -G	33
VSH -CG	33
VCR -N / VCR -C	34
WATERLOOP SYSTEM	35
MCC-N/-S BCC-N/-S	39
MDM-P/-S BDM-P/-S	41
CWF	42
CONDENSING UNITS	43
MDF -N / BDF -N	45
MDH -N / BDH -N	48
MDH -C / BDH -C	48
VRC	50
Cooling connection	51
Electronic regulation	52
kiconex	53
Transport package dimensions	54
Sales terms	55

Cold room calculation

Quick needs calculation

The chart below shows recommended cooling needs for high temperature process rooms and cold rooms at positive and negative temperature according to the calculation basis.

Cold room volume (m³)	Recommended cooling needs for standard process handling rooms and cold storage rooms (W)				
	HIGH TEMPERATURE (12 °C)		POSITIVE TEMPERATURE (0 °C)		NEGATIVE TEMPERATURE (-20 °C)
	No floor panel	50 mm insulation	Floor panel	No floor panel	
Commercial cold rooms	5	700	900	700	
	10	1 300	1 200	1 500	1 100
	15	1 600	1 600	2 000	1 400
	20	1 900	1 900	2 400	1 700
	25	2 300	2 300	2 800	2 000
	30	2 600	2 600	3 300	2 200
	40	3 200	3 200	4 000	2 700
	50	3 800	3 800	4 800	3 100
	60	4 400	4 400	5 400	3 600
	75	5 100	5 100	6 400	4 200
	100	6 400	6 400	8 000	5 100
	125	7 500	7 500	9 400	5 900
	150	8 600	8 600	10 800	6 700
	175	9 700	9 700	12 100	7 500
	200	10 700	10 700	13 300	8 200
	250	12 600	12 600	15 800	9 600

Unit capacity correction

Cooling capacity indicated in this catalogue are based on the cooling performance of the unit with 35 °C ambient temperature.

To obtain cooling capacity of the unit under other ambient temperature values it is recommended to apply the following correction factors:

AMBIENT TEMPERATURE		20 °C	25 °C	30 °C	35 °C	40 °C	45 °C
PT	F _a : Cooling capacity factor	1.23	1.15	1.08	1.00	0.92	0.84
	F _b : Input power factor	0.81	0.88	0.94	1.00	1.07	1.13
NT	F _a : Cooling capacity factor	1.33	1.22	1.11	1.00	0.89	0.77
	F _b : Input power factor	0.85	0.91	0.96	1.00	1.03	1.05


$$\text{Cooling capacity} = F_a \times \text{Cooling capacity}_{|35^\circ\text{C}}$$

$$\text{Input power} = F_b \times \text{Input power}_{|35^\circ\text{C}}$$

$$\text{Cooling capacity}_{|35^\circ\text{C}} = \frac{Q_{\text{Cooling capacity, corrected}}}{F_a}$$

Online refrigeration calculator


For a more accurate calculation we recommend the use of our on-line refrigeration calculator, available on our web site.



By entering basic design data, such as cold room type, application, dimensions and insulation thickness, you will get a quick estimation based on other standard assumptions. You will also be able to customise your calculation by entering further data and to select the most suitable refrigeration unit according to your needs.



<https://www.intarcon.com/en/refrigeration-calculation/>



Correction of refrigeration needs

To obtain the corrected cooling load for a cold room with special characteristics, the application of a series of correction factors is proposed, based on the following:

$$Q_{\text{Cooling capacity corrected}} =$$

$$Q_{\text{Cooling capacity}} \times F_1 \times F_2 \times F_3 \times F_4$$

Where correction factors adopt the following values:

F1: Ambient temperature

The following correction factors can be used to obtain the cooling load at an ambient temperature other than the calculation temperature of 35 °C:

- Ambient temperature of 40 °C: **F₁ = 1.05**
- Ambient temperature of 45 °C: **F₁ = 1.10**

F2: Breathing of fruit and vegetable products

The ripening process of fruit and vegetable products in positive temperature storage produces a considerable amount of heat. This breathing heat can represent, depending on the type of product, up to 50 % additional cooling load.

For indicative purposes, we suggest a factor:

$$F_2 = 1,25$$

F3: High product turnover rate

The cooling capacities indicated in the table have been obtained with a conventional product rotation, according to calculation basis. A high product turnover of twice the rotation rate considered can represent up to an additional 50 % of refrigeration needs.

$$F_3 = 1,50$$

Calculation example

Calculation of an 80 m³ apple conservation cold room, isolated with an 80 mm thickness refrigeration panel, with uninsulated floor:

1. From the values in the table, the reference refrigeration load for 80 m³ is interpolated.

$$Q_{\text{cooling capacity}} = 6\,720\text{ W}$$

2. The correction factor for the heat of respiration of fruit and vegetable products is applied: **F₂ = 1.25**

$$Q_{\text{cooling capacity corrected}} =$$

$$Q_{\text{cooling capacity}} \times 1.25 = 8\,400\text{ W}$$

Cooling needs calculation basis for cooling needs

Cooling needs shown for each cold room volume in product technical features charts in this catalogue have been calculated according to the following assumptions:

- Ambient temperature: 35 °C.
- Product load density: 250 kg/m³.
- Daily rotation rate depending on cold room volume: 10 % (V ≤ 100 m³), 8 % (100 m³ < V).
- Product specific heat PT: 3,2 kJ/(kg·K), NT: 1,8 kJ/(kg·K).
- Product inlet temperature: 25 °C (PT) and -5 °C (NT).
- Insulation panel: Injected polyurethane with 40 kg/m³ density and 0,025 W/(m·K) conductivity, with 80 mm (PT) and 100 mm (NT) thick and floor panel.
- 18 daily hours compressor operation time.



Commercial monoblocks

Compact refrigeration units for wall, door or roof-top installation



Easy and quick
installation



100 % natural
solution



R-290 low
refrigerant charge

door intarblock




Commercial monoblock for refrigeration and freezing cold rooms, for assembly in the door panel of the cold room with optional R-290 refrigerant and air curtain built-in on the unit.

Features

- ▶ 230V 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ R-290 refrigerant load, below 0.1 kg.
- ▶ R-134a or R-449A refrigerant load, below 1 kg.
- ▶ Hermetic reciprocating compressor.
- ▶ High pressure switch.
- ▶ Low pressure switch (CP-ND series).
- ▶ Thermostatic expansion valve.
- ▶ MCB protection.
- ▶ Hot gas defrost.
- ▶ Stainless steel drain pan.
- ▶ Evaporation of condensed water.
- ▶ Cold room LED light and door micro-switch.
- ▶ Door heater cable (only for BCP series).
- ▶ Multifunction electronic control.

Installation scheme with air curtain (optional)

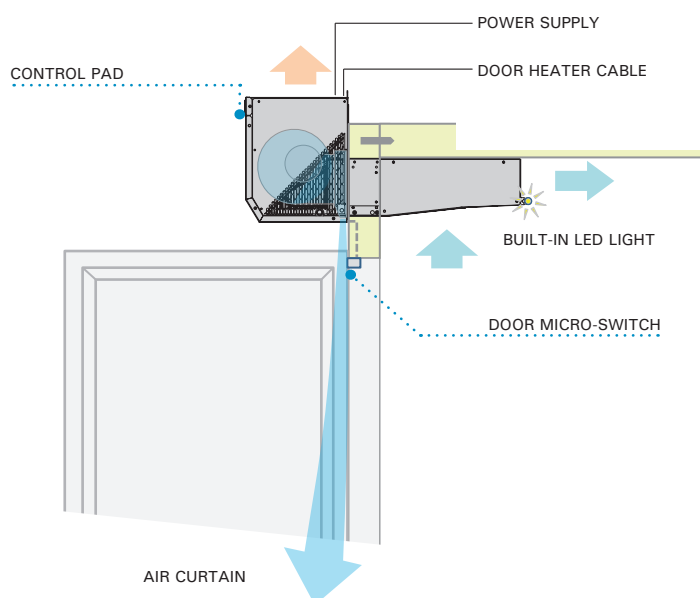

- ❄ Natural refrigerant **R-290** with high energy efficiency.
- ❄ Optimal use of space in mini cold rooms.
- ❄ Tropicalised design for ambient temperature up to 45 °C.
- ❄ Air curtain (optional).
- ❄ Units exempt from leak checks.

Installation



Air curtain (optional)

Door monoblock can incorporate an air curtain built-in into the unit, especially dimensioned for doors of 1 800 mm high and up to 800 mm. It has an adjustable speed centrifugal fan, door switch and linear diffuser.

Air curtain creates an invisible barrier to prevent the loss of cold inside the cold room, which is activated during the opening of the door, and prevents the entry of hot air and the loss of cold air, with an efficiency greater than 50 %.

- Centrifugal fan.
- Longitudinal air diffuser.
- Automatic activation with door opening.

Electronic control

XW60LH electronic control, as standard on our commercial propane and door monoblock units, is an advanced small size controller, which includes the following functions:



- Temperature control with maximum and minimum temperature recording.
- Quick cooling function "Jet Cool".
- Night operation mode.
- Energy saving.
- 4 output relays for: compressor, fan, defrost and light.
- 3 temperature NTC probes for cold room, defrost and condensation.

Built-in cold room LED light

High efficiency cold room LED light, built-in in the unit that is automatically activated when the cold room door is opened.

230V 50Hz | Positive temperature | R-290

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrigerant load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	
	HP	Power supply	0 °C		5 °C		10 °C									
			W	m³	W	m³	W	m³								
R-290	MCP-ND-0 009	1/3	230V	700	6	810	8	945	13	0.34	3.1	275	< 0.1	61	29	2 293
	MCP-ND-1 012	1/2	230V	1 065	9	1 235	15	1 430	27	0.52	4.3	550	< 0.1	67	29	2 777
	MCP-ND-1 017	3/4	230V	1 325	14	1 530	20	1 765	35	0.72	4.5	550	< 0.1	67	31	3 140

230V 50Hz | Negative temperature | R-290

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrigerant load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	
	HP	Power supply	-25 °C		-20 °C		-15 °C									
			W	m³	W	m³	W	m³								
R-290	BCP-ND-0 014	3/4	230V	420	1	500	2.5	590	5	0.30	3.3	275	< 0.1	62	29	2 669
	BCP-ND-1 017	3/4	230V	575	2	695	6	825	9	0.34	4.3	550	< 0.1	67	29	3 019
	BCP-ND-1 028	1 1/4	230V	750	4	905	9	1 070	15	0.64	6.0	550	< 0.1	74	31	3 407

230V 50Hz | Positive temperature | R-134a

Series / Model		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrigerant load (kg) ⁽³⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	Price with air curtain (€)
				0 °C		5 °C		10 °C									
	HP	Power supply	W	m³	W	m³	W	m³									
R-134a	MCP-NY-0 010	3/8 230V	580	4	695	7	820	12	0.47	4.6	300	<1.0	61	29	2 121	2 710	
	MCP-NY-0 015	1/2 230V	760	7	890	10	1 030	15	0.61	5.6	300	<1.0	66	32	2 390	2 979	
	MCP-NY-1 015	1/2 230V	880	8	1 055	12	1 250	21	0.68	5.8	600	<1.0	72	32	2 642	3 231	
	MCP-NY-1 026	3/4 230V	1 180	11	1 435	18	1 710	28	0.91	9.5	600	<1.0	79	30	3 018	3 607	
	MCP-NY-1 033	1 230V	1 490	17	1 760	26	2 070	40	1.03	9.7	600	<1.0	83	33	3 390	3 979	

230V 50Hz | Negative temperature | R-449A


Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrigerant load (kg) ⁽³⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	Price with air curtain (€)	
	HP	Power supply	-25 °C		-20 °C		-15 °C										
			W	m³	W	m³	W	m³									
R-449A	BCP-NG-0 018	5/8	230V	390	1	490	2	585	3	0,67	7,2	300	<1.0	67	31	2 712	3 301
	BCP-NG-1 026	3/4	230V	640	3	810	7	960	10	1,00	8,6	600	<1.0	74	31	3 166	3 755
	BCP-NG-1 034	1 1/4	230V	790	4	950	10	1 120	12	1,27	11,1	600	<1.0	80	33	3 363	3 952

Options

- Evaporator coil epoxy anti-corrosion treatment.

+ 6 %

Dimensions

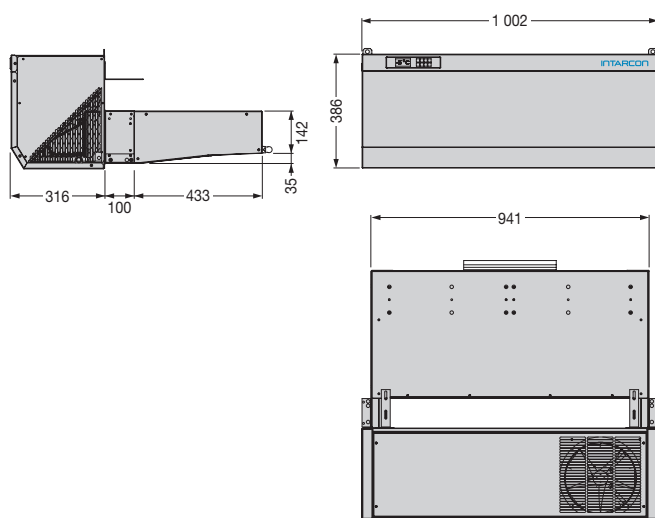

Measuring mm.


⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ A3 refrigerant charge less than 0.5 kg, units exempt from the International Electrotechnical Committee (IEC 60335).

⁽³⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽⁴⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

Mounting frame





Commercial monoblock units for small-size chiller and freezer cold rooms, for ceiling panel installation.


Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ R-290 refrigerant load, below 0.2 kg.
- ▶ R-134a or R-449A refrigerant load, below 1.5 kg.
- ▶ Hermetic reciprocating compressor.
- ▶ High pressure switch.
- ▶ Low pressure switch (CR-ND series).
- ▶ Thermostatic expansion valve.
- ▶ MCB protection.
- ▶ Hot gas defrost.
- ▶ Stainless steel drain pan.
- ▶ Evaporation of condensed water.
- ▶ Cold room LED light and micro-switch (CR-ND model).
- ▶ Cold room light and micro-switch cable (CR-Y/G model).
- ▶ Door heater cable (only BCR model).
- ▶ Evaporator case made in sandwich panel, with 50 mm polyurethane insulation, internally covered in steel sheet.
- ▶ Multifunction electronic control.

Series

- ▶ **CR-N:** Axial monoblock version for ceiling panel installation.
- ▶ **CR-C:** Centrifugal monoblock version with centrifugal motor fan to duct the hot condensation air outdoors.

Installation scheme (1,2 and 3 series)

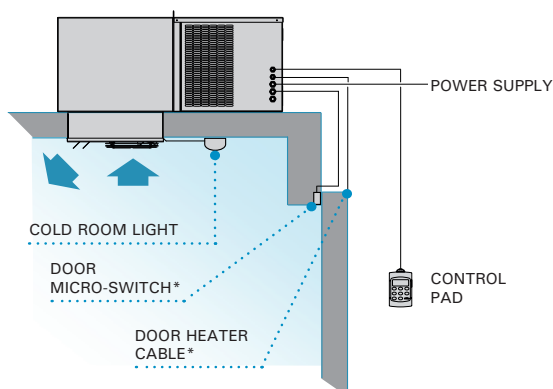

* Door heater cable only in negative temperature series.
* Door micro-switch not included (except CR-ND models).

- ❄ Natural refrigerant **R-290** with high energy efficiency.
- ❄ Tropicalised design for ambient temperature up to 45 °C.
- ❄ Thermostatic expansion valve.
- ❄ Hot gas defrost with temperature control.
- ❄ Units exempt from leak checks.

Installation



Electronic control


intartop units feature XWING electronic control as standard:



- Multi-function remote digital control.
- Temperature control with maximum and minimum temperature value recording.
- Quick cooling function Jet Cool.
- Night operation mode.

Centrifugal version

intartop centrifugal units feature a centrifugal motor fan to duct the hot condensation air outdoors.



Exhaust duct

Recommended size for 20 m long steel, PVC or fibreglass ducts (each elbow at 90° equals 5 m in length). For flexible or semi-flexible ducts use a larger size:

- 0 series: 200 x 150 mm or Ø 150 mm
- 1 series: 200 x 200 mm or Ø 150 mm
- 2 series: 250 x 150 mm or Ø 200 mm
- 3 series: 200 x 300 mm or Ø 250 mm

230V 50Hz | Positive temperature | R-290

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	
	HP	Power supply	0 °C		5 °C		10 °C									
			W	m³	W	m³	W	m³								
R-290	MCR-ND-0 009	1/3	230V	670	5	780	7	900	12	0.39	3.6	300	< 0.10	63	29	2 253
	MCR-ND-1 012	1/2	230V	1 060	9	1 240	15	1 435	27	0.53	3.4	600	< 0.10	73	29	2 735
	MCR-ND-1 017	3/4	230V	1 370	14	1 585	21	1 815	36	0.68	4.5	600	< 0.15	73	31	3 050
	MCR-ND-2 026	2	230V	1 850	21	2 200	34	2 577	58	0.98	5.9	1 150	< 0.15	96	35	4 073
	MCR-ND-2 034	2 1/2	230V	2 240	27	2 650	43	2 995	70	1.35	9.0	1 150	< 0.20	96	35	5 122

230V 50Hz | Negative temperature | R-290

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	
	HP	Power supply	-25 °C		-20 °C		-15 °C									
			W	m³	W	m³	W	m³								
R-290	BCR-ND-0 014	3/4	230V	385	1	460	2	550	4	0.39	3.3	300	< 0.10	65	29	2 654
	BCR-ND-1 017	3/4	230V	540	2	660	5	800	8	0.49	3.5	600	< 0.10	73	29	2 981
	BCR-ND-1 028	1 1/4	230V	770	4	925	9	1 100	15	0.73	6.0	600	< 0.15	80	31	3 266
	BCR-ND-2 034	1 1/2	230V	985	7	1 215	14	1 475	25	0.99	9.3	1 150	< 0.20	96	34	4 011

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-134a

Axial version		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrig. load (kg) ⁽³⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁵⁾	Price (€)
Series / Model	HP	Power supply	0 °C		5 °C		10 °C		Series / Model								Conden. air flow (m³/h)	ASP (mmca) ⁽⁵⁾	Price (€)	
			W	m³	W	m³	W	m³												
R-134a	MCR-NY-0 010	3/8	230V	605	4.0	751	7.0	902	12	0.43	4.5	300	< 1.0	62	29	2 021	MCR-CY-0 010	375	8	2 288
	MCR-NY-0 015	1/2	230V	788	6.1	956	10	1 134	18	0.53	5.5	300	< 1.0	65	32	2 312	MCR-CY-0 015	375	8	2 618
	MCR-NY-1 015	1/2	230V	999	8.2	1 231	12	1 490	23	0.58	5.6	600	< 1.0	73	32	2 462	MCR-CY-1 015	575	8	2 788
	MCR-NY-1 026	3/4	230V	1 265	12	1 549	19	1 853	30	0.93	9.3	600	< 1.0	82	30	3 000	MCR-CY-1 026	575	8	3 397
	MCR-NY-1 033	1	230V	1 502	16	1 817	26	2 153	41	1.05	9.5	600	< 1.0	83	33	3 388	MCR-CY-1 033	575	8	3 834
	MCR-NY-2 033	1	230V	1 911	24	2 363	37	2 846	61	1.21	10.3	1 150	< 1.5	98	34	3 851	MCR-CY-2 033	1 000	12	4 364
	MCR-NY-2 053	1 1/2	230V *	2 352	33	2 882	50	3 455	75	1.67	12.9	1 150	< 1.5	99	38	4 562	MCR-CY-2 053	1 000	12	5 170
	MCR-NY-2 074	2	230V *	2 940	40	3 560	60	4 211	90	1.83	16.9	1 150	< 1.5	110	44	5 051	MCR-CY-2 074	1 000	12	5 721
	MCR-NY-3 108	5	400V 3N	3 725	48	4 465	71	5 155	121	2.30	15.1	1 300	< 2.0	149	45	5 611	MCR-CY-3 108	1 500	14	6 135


230V 50Hz / 400V 3N 50Hz | Negative temperature | R-449A

Axial version		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrig. load (kg) ⁽³⁾	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price (€)	Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁵⁾	Price (€)
Series / Model	HP	Power supply	-25 °C		-20 °C		-15 °C		Series / Model								Conden. air flow (m³/h)	ASP (mmca) ⁽⁵⁾	Price (€)	
			W	m³	W	m³	W	m³												
R-449A	BCR-NG-0 018	5/8	230V	418	0.6	525	1.5	638	2.8	0.59	4.7	300	< 0.5	65	31	2 601	BCR-CG-0 018	375	8	2 905
	BCR-NG-1 026	3/4	230V	562	2.0	736	4.1	907	7.7	0.84	8.5	600	< 1.0	84	31	3 032	BCR-CG-1 026	575	8	3 393
	BCR-NG-1 034	1 1/4	230V	703	3.2	892	5.8	1 060	10	1.05	11.0	600	< 1.0	84	33	3 194	BCR-CG-1 034	575	8	3 562
	BCR-NG-2 034	1 1/4	230V	775	3.8	1 102	7.8	1 406	14	1.11	11.5	1 150	< 1.0	135	35	3 628	BCR-CG-2 034	1 000	12	4 152
	BCR-NG-2 055	1 3/4	230V *	1 160	8.0	1 575	15	2 015	27	1.60	12.6	1 150	< 1.5	145	41	4 267	BCR-CG-2 055	1 000	12	4 809
	BCR-NG-2 075	2 1/2	230V *	1 470	11	1 870	19	2 295	32	2.00	25.5	1 150	< 1.5	145	44	4 818	BCR-CG-2 075	1 000	12	5 383
	BCR-NG-3 075	2 1/2	230V *	1 630	13	2 115	23	2 655	38	2.10	25.5	1 300	< 1.5	147	44	5 365	BCR-CG-3 075	1 500	14	5 908
	BCR-NG-3 096	3 1/2	400V 3N	1 850	15	2 420	27	3 010	46	2.20	11.2	1 300	< 1.5	147	49	5 550	BCR-CG-3 096	1 500	14	6 074

Options

- Change to 400V 3N 50Hz power supply (CR-Y/G models). + 5 %
- Door micro-switch (CR-Y/G models). + 63 €
- Non-return damper (centrifugal version). + 67 €
- Adaptation of air discharge to circular duct (CR-Y/G models). + 123 €
- Vertical discharge (centrifugal version).
- Evaporator coil epoxy anti-corrosion treatment. + 6 %

Dimensions

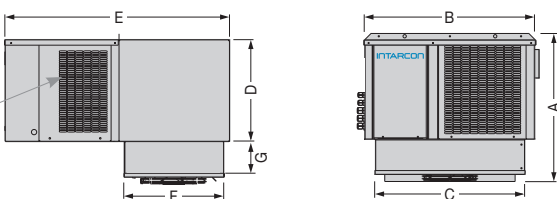

Dimensions (mm)	A	B	C	D	E	F	G	Fan outlet	Hopper
0 series	480	600	430	330	790	375	100	185 x 115	Ø 150
1 series	574	665	582	385	850	379	135	185 x 115	Ø 150
2 series	677	835	756	469	850	379	135	230 x 130	Ø 200
3 series	680	925	843	485	1 070	454	145	266 x 236	Ø 250

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ A3 refrigerant charge less than 0.5 kg, units exempt from the International Electrotechnical Committee (IEC 60335).


⁽³⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽⁴⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

⁽⁵⁾ Available static pressure of condensation.

* Units available with 400V 3N 50Hz power supply.

Mounting frames



Dimensions (mm)	H	I
0 series	435	380
1 series	590	385
2 series	760	385
3 series	850	460

CEILING FRAME

R-290 intarblock




Self-contained slim monoblock units for wall-mount installation in small cold rooms for positive and negative temperature.

This new range of monoblock units incorporates the latest technology components in a very compact size that integrates into the wall panel of the cold room.

Features

- ▶ 230V 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ R-290 refrigerant load, below 0.2 kg.
- ▶ Hermetic reciprocating compressor.
- ▶ EC motor fans.
- ▶ High and low pressure switches.
- ▶ Thermostatic expansion valve.
- ▶ Hot gas defrost.
- ▶ Stainless steel drain pan.
- ▶ Evaporation of condensed water.
- ▶ Cold room LED light and door micro-switch.
- ▶ Removable through-wall insulation pad included.
- ▶ Door heater cable (only for BCV series).
- ▶ Multifunctional electronic control.

Installation scheme

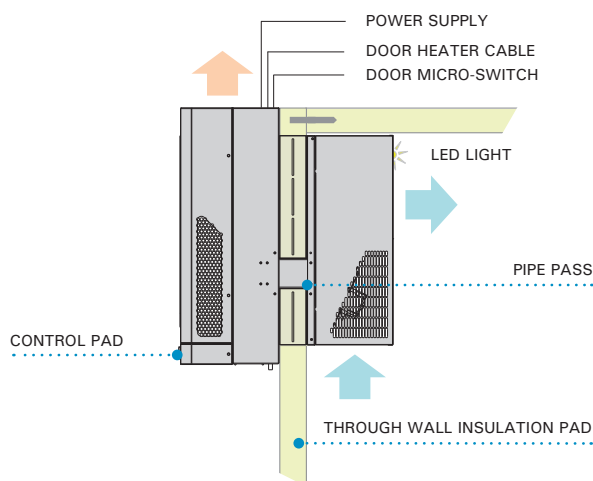

- ❄ Natural refrigerant **R-290** with high energy efficiency.
- ❄ Tropicalised design for ambient temperature up to 45 °C.
- ❄ Thermostatic expansion valve.
- ❄ Hot gas defrost with temperature control.

Installation



Propane

Propane or R-290 is a hydrocarbon used as a refrigerant in small commercial refrigeration units. It has a low environmental impact and excellent thermodynamic properties.

- ▶ Global-warming potential GWP = 0,02 according to IPCC AR6
- ▶ Boiling point at 1.013 bar (°C): -42.10
- ▶ Temperature slip (°C): 0
- ▶ Safety classification: A3. Not toxic but extremely flammable.
- ▶ The International Electrotechnical Committee IEC 60335 allow the use of up to 0.5 kg on compact commercial refrigeration units.

Electronic control

XW60LH electronic control, as standard on our commercial propane and door monoblock units, is an advanced small size controller, which includes the following functions:



- Temperature control with maximum and minimum temperature recording.
- Quick cooling function Jet Cool.
- Night operation mode.
- 4 output relays for: compressor, fan, defrost and light.
- 3 temperature NTC probes for cold room, defrost and condensation.

Built-in cold room LED light

High efficiency cold room LED light, built-in in the unit that is automatically activated when the cold room door is opened.

230V 50Hz | Positive temperature | R-290

Series / Model		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrigerant load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
				0 °C		5 °C		10 °C								
		HP	Power supply	W	m³	W	m³	W	m³							
R-290	MCV-LD-0 009	1/3	230V	635	5	740	7	850	12	0.40	3.5	300	< 0.10	38	29	2 139
	MCV-LD-1 012	1/2	230V	1 050	9	1 220	15	1 410	27	0.52	3.3	500	< 0.10	56	29	2 574
	MCV-LD-1 017	3/4	230V	1 340	14	1 560	21	1 780	36	0.68	4.3	500	< 0.15	57	31	2 870
	MCV-LD-2 026	2	230V	1 824	21	2 170	34	2 540	58	0.94	5.9	950	< 0.15	86	35	3 642
	MCV-LD-2 034	2 1/2	230V	2 215	27	2 618	43	2 960	70	1.31	9.0	950	< 0.20	86	35	4 565

230V 50Hz | Negative temperature | R-290


Series / Model		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrigerant load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
		HP	Power supply	-25 °C		-20 °C		-15 °C								
				W	m³	W	m³	W	m³							
R-290	BCV-LD-0 014	3/4	230V	370	1	440	2	520	4	0.38	3.6	300	< 0.10	38	29	2 539
	BCV-LD-1 017	3/4	230V	540	2	660	5	790	8	0.48	4.3	500	< 0.10	57	29	2 821
	BCV-LD-1 028	1 1/4	230V	770	4	920	9	1 090	15	0.73	5.6	500	< 0.15	64	31	3 106
	BCV-LD-2 034	1 1/2	230V	985	7	1 210	14	1 470	25	0.97	9.3	950	< 0.20	86	34	3 333

Options

- Evaporator coil epoxy anti-corrosion treatment.

+ 6 %

Dimensions

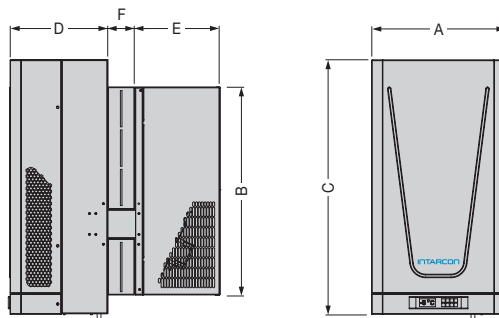


Dimensions (mm)	A	B	C	D	E	F
0 series	420	596	803	237	207	86
1 series	420	656	803	307	270	86
2 series	620	676	764	343	310	106

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ A3 refrigerant charge less than 0.5 kg, units exempt from the International Electrotechnical Committee (IEC 60335).

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

Mounting frames



PLUG-IN FRAME		
Dimensions (mm)	G	H
0 series	400	600
1 series	400	660
2 series	600	680

intarblock



Self-contained monoblock units for wall-mount installation in small cold rooms at positive and negative temperature.


Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ R-134a or R-449A refrigerant load, below 2 kg.
- ▶ Hermetic reciprocating compressor.
- ▶ High pressure switches.
- ▶ Thermostatic expansion valve.
- ▶ MCB protection.
- ▶ Hot gas defrost.
- ▶ Stainless steel drain pan.
- ▶ Evaporation of condensed water.
- ▶ Cold room lamp and door micro-switch cable.
- ▶ Door heater cable (only for BCV series).
- ▶ Removable through-wall insulation pad included.
- ▶ Multifunction electronic control.

Series


- ▶ **CV-N:** Monoblock units ready for quick installation through cold room wall and removable through-wall insulation pad for drop-in frame mounting.
- ▶ **CV-C:** Centrifugal version units featuring a centrifugal motor fan for ducted outlet of condenser hot air.
- ▶ **CV-I:** Weatherproof monoblock units for outdoors installations at positive and negative small cold rooms.

Installation scheme



Plug-in frame mounting

A removable insulation pad is included for direct installation through a hole in the cold room wall.



Drop-in frame mounting (except for series 0)

After cutting a channel for tube passage in the wall panel, the unit can be dropped in before assembling the ceiling panel.

- ❄ Compact unit with reduced refrigerant load, less than 2 kg.
- ❄ Tropicalised design for high ambient temperature up to 45 °C.
- ❄ Thermostatic expansion valve.
- ❄ Hot gas defrost with temperature control.
- ❄ Units exempt from leak checks.

Installation



Electronic control


intarblock units feature XWING electronic control as standard.



- Temperature control with maximum and minimum temperature value recording.
- Quick cooling function "Jet Cool".
- Night operation mode.

Centrifugal version

intarblock centrifugal units feature a centrifugal motor fan to duct hot condensation airflow outdoors.

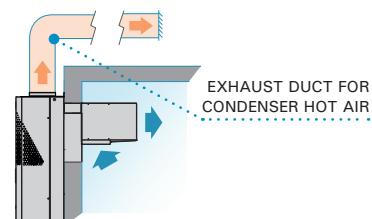

Exhaust duct

Recommended size for 20 m long steel, PVC or fibreglass ducts (each elbow at 90° equals 5 m in length). For flexible or semi-flexible ducts use a larger size.

- 0 series: 200 x 150 mm or Ø 150 mm
- 1 series: 200 x 200 mm or Ø 150 mm
- 2 series: 250 x 150 mm or Ø 200 mm
- 3 series: 300 x 200 mm or Ø 250 mm

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-134a

Axial version	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	
			0 °C		5 °C		10 °C									
	Series / Model	HP	Power supply	W	m³	W	m³	W	m³							
R-134a	MCV-NY-0 010	3/8	230V	610	4.0	758	7.0	907	12	0.43	4.5	300	< 1.0	36	29	1 876
	MCV-NY-0 015	1/2	230V	794	6.0	961	10	1 139	18	0.53	5.5	300	< 1.0	38	32	2 166
	MCV-NY-1 015	1/2	230V	972	8.0	1 199	14	1 453	23	0.57	5.6	500	< 1.0	60	32	2 388
	MCV-NY-1 026	3/4	230V	1 281	12	1 565	19	1 859	30	0.81	9.3	500	< 1.0	69	30	2 664
	MCV-NY-1 033	1	230V	1 454	14	1 743	25	2 037	41	0.92	9.5	500	< 1.0	70	33	2 814
	MCV-NY-2 033	1	230V	1 790	19	2 163	36	2 573	57	1.09	10.3	950	< 1.5	88	34	3 467
	MCV-NY-2 053	1 1/2	230V *	2 153	24	2 609	41	3 103	72	1.46	12.9	950	< 1.5	89	38	3 882
	MCV-NY-3 053	1 1/2	230V *	2 489	29	3 103	53	3 743	83	1.51	13.1	1 300	< 2.0	117	39	4 484
	MCV-NY-3 074	2	230V *	3 239	40	3 938	70	4 667	97	1.89	17.1	1 300	< 2.0	114	44	4 870
	MCV-NY-3 108	5	400V 3N	3 927	51	4 725	110	5 539	130	2.48	18.6	1 300	< 2.0	116	45	5 186

Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
Series / Model			
MCV-CY-0 010	375	8	2 127
MCV-CY-0 015	375	8	2 452
MCV-CY-1 015	575	8	2 704
MCV-CY-1 026	575	8	3 019
MCV-CY-1 033	575	8	3 188
MCV-CY-2 033	950	13	3 926
MCV-CY-2 053	950	13	4 396
MCV-CY-3 053	1 150	8	5 264
MCV-CY-3 074	1 150	8	5 718
MCV-CY-3 108	1 150	8	6 088

230V 50Hz / 400V 3N 50Hz | Negative temperature | R-449A


	Axial version	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
	Series / Model	HP	Power supply	-25 °C		-20 °C		-15 °C								
				W	m³	W	m³	W	m³							
R-449A	BCV-NG-0 018	5/8	230V	382	0.6	486	1.5	596	2.8	0.50	4.7	300	< 0.5	38	31	2 525
	BCV-NG-1 026	3/4	230V	550	2.1	721	4.3	888	7.6	0.84	8.5	550	< 1.0	60	31	2 909
	BCV-NG-1 034	1 1/4	230V	697	3.2	882	6.1	1 047	10	1.05	11.0	550	< 1.0	60	33	2 990
	BCV-NG-2 034	1 1/4	230V	793	3.8	1 049	7.7	1 341	14	1.11	11.9	950	< 1.0	89	35	3 192
	BCV-NG-2 055	1 3/4	230V *	1 155	8.0	1 560	15	1 960	26	1.60	17.5	950	< 1.0	96	41	3 820
	BCV-NG-2 075	2 1/2	230V *	1 453	11	1 835	18	2 245	31	2.00	25.5	950	< 1.0	101	44	4 186
	BCV-NG-3 075	2 1/2	230V *	1 680	13	2 150	23	2 635	38	2.20	26.0	1 300	< 1.5	113	44	4 655
	BCV-NG-3 096	3 1/2	400V 3N	2 022	18	2 492	32	2 942	54	2.39	12.1	1 300	< 1.5	129	49	4 951

Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
Series / Model			
BCV-CG-0 018	375	8	2 817
BCV-CG-1 026	575	8	3 243
BCV-CG-1 034	575	8	3 317
BCV-CG-2 034	950	13	3 678
BCV-CG-2 055	950	13	4 316
BCV-CG-2 075	950	13	4 685
BCV-CG-3 075	1 150	8	5 393
BCV-CG-3 096	1 150	8	5 706

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Door micro-switch. + 63 €
- Non-return damper (centrifugal version). + 67 €
- Adaptation of air discharge to circular duct. + 123 €
- Evaporator coil epoxy anti-corrosion treatment. + 6 %

Dimensions

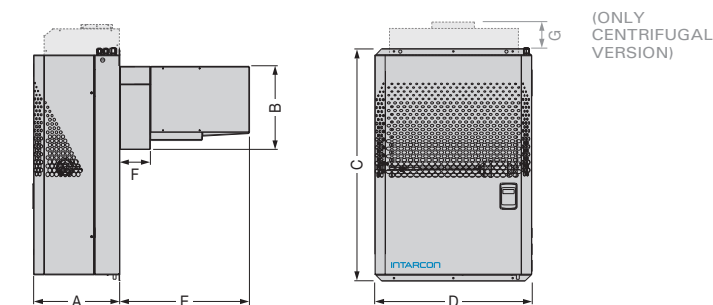

Dimensions (mm)	A	B	C	D	E	F	G	Fan outlet
0 series	306	510	683	420	250	100	90	185 x 115
1 series	340	330	880	400	514	122	42	185 x 115
2 series	340	330	920	620	514	122	140	230 x 130
3 series	365	470	940	735	514	122	50	2x 185 x 115

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).


⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

⁽⁴⁾ Available Static Pressure of condensation.

* Available units with 400V 3N 50Hz power supply.

Mounting frame

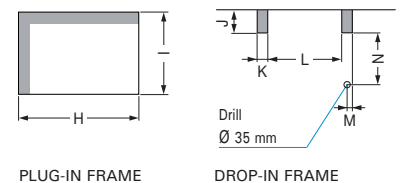

Dimensions (mm)	H	I	J	K	L	M	N
0 series	405	515	n/a	n/a	n/a	n/a	n/a
1 series	380	335	75	38	295	21	218
2 series	600	335	75	30	522	16	218
3 series	715	475	75	45	607	20	356

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-452A

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾								Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Condens. air flow (m³/h)	Refrig. load (kg)	Weight (kg)	SPL dB(A) ⁽²⁾	Price (€)	
	HP	Power supply	-5 °C		0 °C		5 °C		10 °C										
			W	m³	W	m³	W	m³	W	m³									
R-452A	MCV-IB-1 010	3/8	230V	630	3.5	799	6.4	966	11	1 157	19	0.65	5.5	500	575	< 1.0	59	34	2 943
	MCV-IB-1 012	1/2	230V	767	4.9	930	8.2	1 118	14	1 317	23	0.67	6.5	500	575	< 1.0	60	34	3 036
	MCV-IB-1 014	1/2	230V	893	6.3	1 077	10	1 270	16	1 485	27	0.80	7.1	500	575	< 1.0	60	34	3 133
	MCV-IB-1 016	5/8	230V	985	7.4	1 184	12	1 386	19	1 615	30	0.87	8.0	500	575	< 1.0	69	34	3 227
	MCV-IB-1 018	3/4	230V	1 138	9.3	1 347	14	1 570	22	1 806	35	1.02	9.3	500	575	< 1.0	70	34	3 388
	MCV-IB-1 024	1	230V	1 207	10	1 468	16	1 739	25	2 039	41	1.18	12.3	500	575	< 1.0	70	34	3 578
	MCV-IB-2 024	1	230V	1 554	14	1 917	23	2 296	36	2 726	57	1.36	11.9	950	950	< 1.0	88	35	4 407
	MCV-IB-2 026	1 1/4	230V *	1 795	17	2 149	26	2 526	40	2 945	63	1.47	12.3	950	950	< 1.0	89	36	4 666
	MCV-IB-2 034	1 1/2	230V *	1 996	20	2 391	31	2 801	46	3 247	72	1.95	16.9	950	950	< 1.5	89	37	4 921
	MCV-IB-3 034	1 1/2	230V *	2 230	23	2 690	35	3 200	53	3 730	83	2.07	17.1	1 300	1 250	< 2.0	117	38	5 387
	MCV-IB-3 038	1 3/4	400V 3N	2 500	27	3 020	41	3 580	62	4 220	97	1.97	7.9	1 300	1 250	< 1.5	114	40	5 853


230V 50Hz / 400V 3N 50Hz | Negative temperature | R-452A

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Condens. air flow (m³/h)	Refrig. load (kg)	Weight (kg)	SPL dB(A) ⁽²⁾	Price (€)	
	HP	Power supply	-25 °C		-20 °C		-15 °C										
			W	m³	W	m³	W	m³									
R-452A	BCV-IB-1 018	5/8	230V	383	1.0	489	2.0	655	4.4	0.67	7.3	500	575	< 0.5	59	31	3 742
	BCV-IB-1 026	3/4	230V	548	2.1	720	4.3	877	7.6	0.91	8.5	500	575	< 1.0	60	31	3 818
	BCV-IB-1 034	1 1/4	230V	668	3.2	866	6.1	1 023	10	1.14	11.0	500	575	< 1.0	60	33	3 921
	BCV-IB-2 034	1 1/4	230V	793	3.8	1 048	7.7	1 297	14	1.19	11.9	950	950	< 1.0	89	35	4 186
	BCV-IB-2 055	1 3/4	230V *	1 280	11	1 650	14	2 025	22	1.80	17.9	950	950	< 1.0	96	41	5 012
	BCV-IB-2 075	2 1/2	230V *	1 580	15	1 900	17	2 355	27	2.30	25.9	950	950	< 1.0	101	44	5 493
	BCV-IB-3 075	2 1/2	230V *	1 630	16	2 130	19	2 540	30	2.50	26.0	1 300	1 250	< 1.5	113	44	6 140
	BCV-IB-3 096	3 1/2	400V 3N	1 890	18	2 460	32	3 040	54	2.64	12.1	1 300	1 250	< 1.5	129	49	6 500

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Door micro-switch. + 63 €
- Condenser coil polyurethane anti-corrosion treatment. + 4 %
- Evaporator coil epoxy anti-corrosion treatment. + 6 %
- Male and female schuko electrical connector base. + 75 €
- Low voltage protection (single-phase models). + 184 €
- Low voltage and phase sequence protection (three-phase models). + 364 €

Dimensions

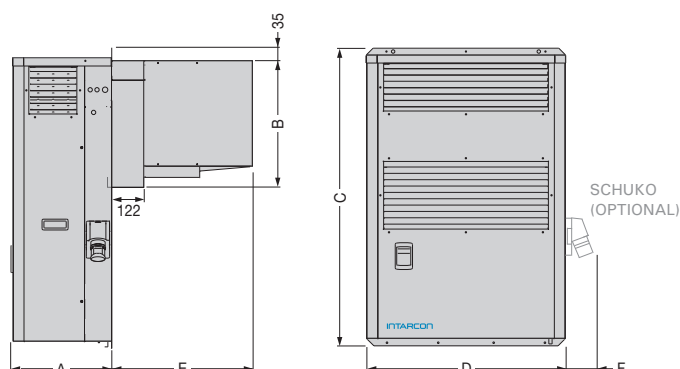

Measuring mm.


Dimensions (mm)	A	B	C	D	E	F
1 series	340	330	1 060	400	514	115
2 series	340	330	1 100	620	514	115
3 series	365	470	1 100	735	514	115
3 096 series	365	470	1 215	735	514	115

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

Mounting frame



Dimensions (mm)	G	H
1 series	380	335
2 series	600	335
3 series	710	475

Installations scheme





Split systems

Condensing and evaporator unit



Low-noise
construction



Units exempt
from leak checks



Refrigerant
pre-load

intarsplit



Split systems for small and medium size cold rooms at positive and negative temperature, composed by a condensing unit in horizontal construction and a slim-type, cubic-type or double-flow evaporating unit.

Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ Minimal R-134a or R-449A refrigerant load.
- ▶ Hermetic reciprocating compressor (noise insulation in 3-phases models).
- ▶ High and low pressure switches.
- ▶ Liquid receiver.
- ▶ Refrigerant pre-load for 10 m of piping.
- ▶ Thermostatic expansion valve.
- ▶ Electrical heater defrost (except ASH series).
- ▶ Drain pan.
- ▶ Flare-type connections (up to 3/8"-3/4") and service valves.
- ▶ 10 m of electrical connections included (except for 4 and 40 up to 54 series).
- ▶ MCB protection.
- ▶ Multifunction electronic control with remote keyboard and digital regulation of condensing pressure.
- ▶ Liquid injection system for negative temperature models with R-449A.


Series

- ▶ **SH-N:** Split systems with axial condensing unit and slim-type evaporating unit.
- ▶ **SH-Q:** Split systems with axial condensing unit and cubic-type evaporating unit.
- ▶ **SH-C:** Split systems with centrifugal condensing unit and slim-type evaporating unit.
- ▶ **SH-CQ:** Split systems with centrifugal condensing unit and cubic-type evaporating unit.
- ▶ **SH-D:** Split systems with axial condensing unit and double-flow evaporating unit.
- ▶ **SH-CD:** Split systems with centrifugal condensing unit and double-flow evaporating unit.

Installation scheme

Maximum vertical distance between units of 15 m if the condensing unit is placed at a higher level than the evaporating unit, and 6 m otherwise.

*20 % minimum slope of draining pipe for negative temperature models.

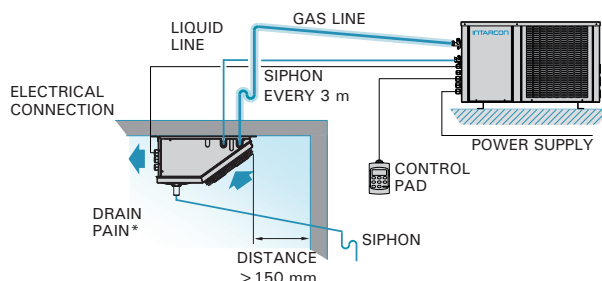

- ❄ Units exempt from leak checks.
- ❄ Factory-tested systems with no need for on-site tests.
- ❄ Tropicalised design for high ambient temperature up to 45 °C.
- ❄ Built-in thermostatic expansion valve.
- ❄ Refrigerant pre-load.

Control pad

intarsplit systems feature XM670K electronic control as standard.



- Remote control keyboard with digital display.
- Temperature control with maximum and minimum temperature value recording.
- Possibility of interconnection and synchronization of up to 8 devices by LAN, managed from a single control.

Digital condensing control


Standard as intarsplit series, it protects the unit against occasional low ambient temperatures. For prolonged operations with negative temperature outside it is recommended to install the proportional condensation control (optional in series 3 and 33 onwards).

Crankcase Heater (optional)

The inclusion of the optional crankcase heater is recommended in all outdoor units.

Centrifugal version

The units of the centrifugal intarsplit series incorporates a centrifugal turbine that allows the condensation hot air to be transported outside by means of air ducts.



Electrical interconnections (SH-N/-C models)

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m.

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm ²	
Manoeuvre	2 x 1 mm ²	3 x 1 mm ²
Defrost	2 x 1.5 mm ² + G	4 x 1.5 mm ² + G
Control pad	2 x 1 mm ²	
Switch door*	2 x 1 mm ²	
Door heater cable	2 x 1 mm ² at NT	
Cold room light*	2 x 1 mm ² + G	

* Optional not included.
To know electrical interconnections of each model: see technical manual.

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-134a / R-449A

Axial version		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
Series / Model	HP	Power supply	0 °C		5 °C		10 °C		Series / Model												
			W	m³	W	m³	W	m³													
R-134a	MSH-NY-00 010	3/8	230V	643	5.1	788	8.5	945	13	0.46	4.6	300	1/4"-3/8"	< 1.5	37+12	29	2 575	MSH-CY-00 010	375	8	2 860
	MSH-NY-00 015	1/2	230V	832	7.2	1 010	10	1 193	19	0.56	5.6	300	1/4"-3/8"	< 1.5	40+12	32	2 790	MSH-CY-00 015	375	8	3 097
	MSH-NY-11 015	1/2	230V	988	8.2	1 220	12	1 474	23	0.58	5.6	550	1/4"-1/2"	< 1.5	41+16	32	2 949	MSH-CY-11 015	575	8	3 271
	MSH-NY-11 026	3/4	230V	1 250	12	1 533	18	1 827	30	0.82	9.3	550	1/4"-1/2"	< 1.5	48+16	30	3 809	MSH-CY-11 026	575	8	4 230
	MSH-NY-11 033	1	230V	1 481	16	1 790	24	2 116	41	0.93	9.5	550	1/4"-1/2"	< 1.5	50+16	33	4 099	MSH-CY-11 033	575	8	4 551
	MSH-NY-22 033	1	230V	1 922	23	2 368	36	2 846	60	1.06	10.0	1 050	1/4"-5/8"	< 2.0	53+24	34	4 572	MSH-CY-22 033	1 000	12	5 073
	MSH-NY-22 053	1 1/2	230V *	2 363	31	2 882	48	3 455	73	1.45	12.6	1 050	1/4"-5/8"	< 2.0	63+24	38	5 068	MSH-CY-22 053	1 000	12	5 627
	MSH-NY-33 053	1 1/2	230V *	2 688	40	3 318	63	4 069	100	1.55	13.2	1 725	1/4"-3/4"	< 3.5	82+45	38	5 298	MSH-CY-33 053	1 500	14	5 879
	MSH-NY-33 074	2	230V *	3 518	47	4 347	71	5 198	110	1.93	17.2	1 725	1/4"-3/4"	< 3.5	84+45	44	5 708	MSH-CY-33 074	1 500	14	6 337
	MSH-NY-43 086	4	400V 3N	4 379	66	5 366	100	6 421	165	2.39	14.9	1 725	3/8"-7/8"	< 5.0	107+55	48	6 785	MSH-CY-43 086	3 500	10	7 528
R-449A	MSH-NY-44 108	5	400V 3N	5 628	88	6 888	140	8 274	220	3.05	19.2	3 100	3/8"-7/8"	< 5.0	109+55	45	7 528	MSH-CY-44 108	3 500	10	8 361
	MSH-NY-44 136	6 1/2	400V 3N	6 862	115	8 311	170	9 881	260	3.77	23.2	3 100	3/8"-1 1/8"	< 5.5	112+55	44	9 414	MSH-CY-44 136	3 500	10	10 451
	MSH-NG-0 008	1/3	230V	758	5.1	900	8.5	1 071	13	0.47	5.1	300	1/4"-3/8"	< 1.5	38+12	34	2 428	MSH-CG-0 008	375	8	2 669
	MSH-NG-0 010	3/8	230V	893	6.1	1 042	10	1 223	15	0.58	4.8	300	1/4"-3/8"	< 1.5	40+12	34	2 629	MSH-CG-0 010	375	8	2 891
	MSH-NG-0 012	1/2	230V	980	7.2	1 135	12	1 324	19	0.65	5.6	300	1/4"-3/8"	< 1.5	41+12	34	2 780	MSH-CG-0 012	375	8	3 057
	MSH-NG-1 014	1/2	230V	1 100	10	1 313	16	1 564	26	0.79	6.7	550	1/4"-1/2"	< 1.5	44+16	34	3 117	MSH-CG-1 014	575	8	3 451
	MSH-NG-1 016	5/8	230V	1 216	12	1 451	18	1 734	30	0.85	7.6	550	1/4"-1/2"	< 1.5	53+16	34	3 321	MSH-CG-1 016	575	8	3 668
	MSH-NG-1 018	3/4	230V	1 404	14	1 653	22	1 954	35	1.00	8.9	550	1/4"-1/2"	< 1.5	54+16	34	3 593	MSH-CG-1 018	575	8	3 957
	MSH-NG-1 024	1	230V	1 528	16	1 811	24	2 140	41	1.01	11.1	550	1/4"-1/2"	< 1.5	54+16	34	3 863	MSH-CG-1 024	575	8	4 286
	MSH-NG-2 024	1	230V	2 020	23	2 424	36	2 896	60	1.27	11.6	1 050	1/4"-1/2"	< 1.5	65+24	35	4 310	MSH-CG-2 024	1 000	12	4 762
	MSH-NG-2 026	1 1/4	230V *	2 230	26	2 640	41	3 131	64	1.36	12.0	1 050	1/4"-1/2"	< 1.5	66+24	36	4 512	MSH-CG-2 026	1 000	12	5 023
	MSH-NG-2 034	1 1/2	230V *	2 543	31	2 985	48	3 516	73	1.80	16.6	1 050	1/4"-5/8"	< 1.5	66+24	37	4 716	MSH-CG-2 034	1 000	12	5 240
	MSH-NG-3 034	1 1/2	230V *	3 091	40	3 674	63	4 364	100	1.67	17.0	1 725	1/4"-5/8"	< 3.5	74+45	38	4 945	MSH-CG-3 034	1 500	14	5 486
	MSH-NG-3 038	1 3/4	400V 3N	3 459	47	4 060	71	4 786	110	1.53	7.8	1 725	1/4"-5/8"	< 4.0	71+45	40	5 382	MSH-CG-3 038	1 500	14	5 963
	MSH-NG-4 048	2	400V 3N	4 494	66	5 350	98	6 358	155	2.61	10.5	1 725	3/8"-3/4"	< 5.5	95+45	36	6 243	MSH-CG-4 048	3 500	10	6 909
	MSH-NG-4 054	2 1/2	400V 3N	4 949	74	5 847	110	6 916	170	2.80	11.0	1 725	3/8"-3/4"	< 5.0	96+45	36	6 673	MSH-CG-4 054	3 500	10	7 355

230V 50Hz / 400V 50Hz | Negative temperature | R-449A / R-452A

Axial version		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	Centrifugal version	Condens. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
Series / Model	HP	Power supply	-25 °C		-20 °C		-15 °C		Series / Model												
			W	m³	W	m³	W	m³													
R-449A	BSH-NG-0 018	5/8	230V	422	0.9	537	1.8	658	3.9	0.60	4.8	300	1/4"-1/2"	< 1.5	41+12	31	3 060	BSH-CG-0 018	375	8	3 304
	BSH-NG-1 026	3/4	230V	559	2.1	711	4.2	900	7.3	0.84	8.7	550	1/4"-1/2"	< 2.5	55+16	31	3 263	BSH-CG-1 026	575	8	3 506
	BSH-NG-1 034	1 1/4	230V	622	3.0	858	5.9	1 038	10	1.05	11.2	550	1/4"-1/2"	< 2.5	56+16	33	3 633	BSH-CG-1 034	575	8	3 900
	BSH-NG-2 034	1 1/4	230V	815	4.0	1 056	8.0	1 377	14	1.18	11.5	1 050	1/4"-1/2"	< 2.5	66+24	35	3 993	BSH-CG-2 034	1 000	12	4 267
	BSH-NG-2 055	1 3/4	230V *	1 175	8.0	1 675	16	2 090	28	1.70	17.5	1 050	1/4"-5/8"	< 2.5	66+24	41	4 765	BSH-CG-2 055	1 000	12	5 110
	BSH-NG-2 075	2 1/2	230V *	1 620	13	2 035	21	2 435	34	2.10	25.5	1 050	1/4"-5/8"	< 3.5	66+24	44	5 519	BSH-CG-2 075	1 000	12	5 894
	BSH-NG-3 015	2 1/2	230V *	1 795	15	2 410	26	3 020	46	2.30	26.3	1 725	1/4"-5/8"	< 3.5	85+45	44	5 772	BSH-CG-3 075	1 500	14	6 212
R-452A	BSH-NB-3 096	3 1/2	400V 3N	2 046	23	2 745	37	3 435	62	2.18	12.4	1 725	1/4"-3/4"	< 3.5	85+45	49	6 037	BSH-CB-3 096	1 500	14	6 812
	BSH-NB-4 108	4	400V 3N	2 851	34	3 588	55	4 378	94	3.18	15.5	1 725	3/8"-7/8"	< 5.5	107+45	47	7 998	BSH-CB-4 108	3 500	10	8 743
	BSH-NB-4 136	5	400V 3N	3 289	42	4 064	67	4 895	110	4.37	17.4	1 725	3/8"-7/8"	< 5.0	107+45	42	8 937	BSH-CB-4 136	3 500	10	9 731

Options

- Change to 400V 3N50Hz power supply. + 5 %
- Crankcase heater. + 75 €
- Proportional control of condensing pressure:
Axial version (N): 3/33 and 4/43/44 series. + 304 €
Centrifugal version (C): 4/43/44 series. + 486 €
- Vertical air flow (centrifugal version).
- Rectangular to circular exhaust air adaptor. + 123 €
- Built-in oil separator. + 716 €
- Anti-corrosion evaporator coil coating. + 6 %
- Anti-corrosion condenser coil coating. + 4 %
- Larger sized multifunction electronic control. + 184 €

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).


⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

⁽⁴⁾ Available static pressure of condensation

* Available units with 400V 3N 50Hz power supply.

Dimensions

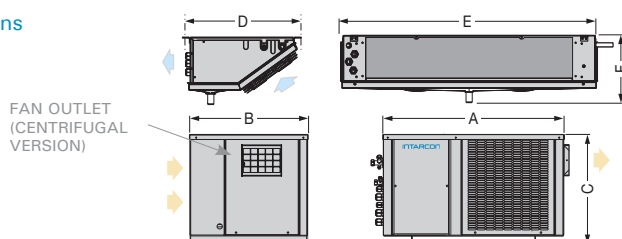

Dimensions (mm)	A	B	C	D	E	F	Evaporator fan	Fan outlet
0 and 00 series	600	396	355	417	549	185	1x Ø 172	185 x 115
1 and 11 series	665	435	416	430	643	235	1x Ø 200	185 x 115
2 and 22 series	835	435	500	430	993	235	2x Ø 200	230 x 130
3 and 33 series	925	580	515	508	1 691	235	3x Ø 254	266 x 236
4 and 43 series	1 000	615	585	508	1 691	235	3x Ø 254	305 x 266
44 series	1 000	615	585	547	2 064	285	4x Ø 300	305 x 266

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-134a / R-449A

Axial version		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Liq-Gas Cooling Connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
Series / Model	HP	Power supply	0 °C		5 °C		10 °C		Series / Model												
			W	m³	W	m³	W	m³													
R-134a	MSH-QY-30 068	3 1/2	400V 3N	3 854	54	4 646	59	5 513	84	2.00	12.0	2 100	1/4"-3/4"	< 4.0	74+43	37	6 340	MSH-CQY-30 068	1 500	14	7 034
	MSH-QY-40 086	4	400V 3N	4 431	63	5 418	68	6 500	100	2.35	14.3	2 100	3/8"-7/8"	< 5.0	107+43	48	7 411	MSH-CQY-40 086	3 500	10	8 224
	MSH-QY-41 108	5	400V 3N	5 324	71	6 500	80	7 775	110	2.77	17.3	2 700	3/8"-7/8"	< 5.0	109+56	45	8 231	MSH-CQY-41 108	3 500	10	9 137
	MSH-QY-42 136	6 1/2	400V 3N	7 235	110	8 773	180	10 474	280	3.85	22.0	4 150	3/8"-1 1/8"	< 5.0	112+72	44	10 288	MSH-CQY-42 136	3 500	10	11 420
	MSH-QY-53 171	8	400V 3N	7 830	135	9 535	185	11 520	300	4.25	24.1	5 200	3/8"-1 1/8"	< 5.5	162+89	50	11 931	MSH-CQY-53 171	3 600	10	13 150
	MSH-QY-53 215	10	400V 3N	9 450	175	11 435	230	13 740	350	5.01	30.5	6 200	3/8"-1 1/8"	< 5.5	166+94	49	13 122	MSH-CQY-53 215	3 600	10	14 424
	MSH-QY-54 271	13	400V 3N	12 400	240	14 760	320	17 420	400	7.13	40.2	8 300	1/2"-1 3/8"	< 5.5	171+118	48	15 360	MSH-CQY-54 271	3 600	10	16 972
R-449A	MSH-QG-30 034	1 1/2	230V *	3 409	39	4 054	62	4 797	99	1.61	16.3	2 100	1/4"-5/8"	< 3.5	74+43	38	5 442	MSH-CQG-30 034	1 500	14	5 962
	MSH-QG-30 038	1 3/4	400V 3N	3 647	46	4 301	70	5 063	110	1.79	7.1	2 100	1/4"-5/8"	< 3.5	71+43	40	5 722	MSH-CQG-30 038	1 500	14	6 261
	MSH-QG-40 048	2	400V 3N	4 752	67	5 559	99	6 554	159	2.42	9.8	2 100	3/8"-3/4"	< 4.5	95+43	36	6 692	MSH-CQG-40 048	3 500	10	7 240
	MSH-QG-40 054	2 1/2	400V 3N	5 203	76	6 060	113	7 106	178	2.61	10.3	2 100	3/8"-3/4"	< 5.0	96+43	36	7 135	MSH-CQG-40 054	3 500	10	7 691
	MSH-QG-41 060	3	400V 3N	6 049	86	7 038	128	8 260	198	3.07	11.3	2 700	1/2"-3/4"	< 5.0	97+56	36	7 733	MSH-CQG-41 060	3 500	10	8 295
	MSH-QG-41 068	3 1/2	400V 3N	6 545	113	7 581	163	8 866	253	3.44	12.3	2 700	1/2"-3/4"	< 5.0	98+56	35	9 291	MSH-CQG-41 068	3 500	10	9 878
	MSH-QG-52 086	4	400V 3N	8 056	125	9 542	185	11 320	315	3.87	15.0	4 150	1/2"-7/8"	< 5.0	135+72	48	11 063	MSH-CQG-52 086	3 600	12	11 658
	MSH-QG-52 108	5	400V 3N	9 386	160	11 011	220	12 991	375	4.90	18.0	4 150	1/2"-7/8"	< 7.0	157+72	45	11 531	MSH-CQG-52 108	3 600	12	12 126
	MSH-QG-53 136	6 1/2	400V 3N	11 894	190	13 856	260	16 173	430	6.67	21.0	6 200	1/2"-1 1/8"	< 9.0	140+94	44	12 476	MSH-CQG-53 136	3 600	12	13 069


230V 50Hz / 400V 3N 50Hz | Negative temperature | R-449A / R-452A

Axial version		Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Liq-Gas Cooling Connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
Series / Model	HP	Power supply	-25 °C		-20 °C		-15 °C														
			W	m³	W	m³	W	m³													
R-452A	BSH-QG-30 075	2 1/2	230V *	1 765	14	2 425	27	3 050	47	2.30	25.1	2 100	1/4"-5/8"	< 3.5	85+43	44	6 056	BSH-CQG-30 075	1 500	14	6 396
	BSH-QB-30 096	3 1/2	400V 3N	2 354	22	2 925	36	3 533	61	2.34	11.2	2 100	1/4"-3/4"	< 3.5	85+43	49	6 733	BSH-CQB-30 096	1 500	14	7 353
	BSH-QB-41 108	4	400V 3N	2 988	34	3 799	58	4 656	99	2.94	14.4	2 700	3/8"-7/8"	< 5.0	107+56	47	8 774	BSH-CQB-41 108	3 500	10	9 379
	BSH-QB-42 136	5	400V 3N	4 205	51	5 119	85	6 092	144	4.16	17.3	4 150	3/8"-7/8"	< 5.0	107+72	42	10 472	BSH-CQB-42 136	3 500	10	11 103
	BSH-QB-53 215	7 1/2	400V 3N	5 692	80	7 300	120	8 976	200	6.08	25.0	5 200	1/2"- 1 1/8"	< 7.0	166+89	49	13 702	BSH-CQB-53 215	3 600	12	14 334
	BSH-QB-53 271	10	400V 3N	7 329	110	9 048	150	10 877	220	7.71	30.0	6 200	1/2"- 1 1/8"	< 7.5	166+94	49	14 437	BSH-CQB-53 271	3 600	12	15 067

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Crankcase heater. + 75 €
- Proportional control of condensing pressure:
Axial version (Q). + 304 €
Centrifugal version (CQ): 40/41/42/52/53/54 series. + 486 €
- Vertical air flow (centrifugal version).
- Rectangular to circular exhaust air adaptor. + 123 €
- Built-in oil separator. + 716 €
- Anti-corrosion evaporator coil coating. + 6 %
- Anti-corrosion condenser coil coating. + 4 %
- Larger sized multifunction electronic control. + 184 €

Dimensions

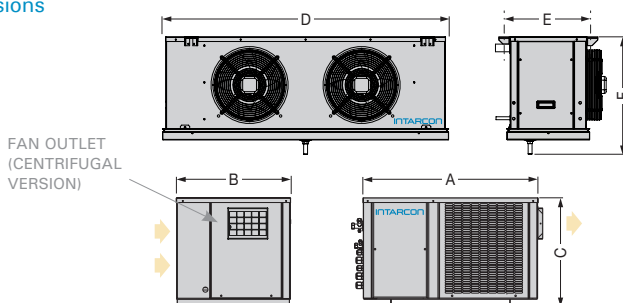

Dimensions (mm)	A	B	C	D	E	F	Evaporator fan	Fan outlet
30 series	925	580	515	880	455	581	1x Ø 350	266 x 236
40 series	1 000	615	585	880	455	581	1x Ø 350	305 x 266
41 series	1 000	615	585	1 230	455	581	1x Ø 350	305 x 266
42 series	1 000	615	585	1 530	455	581	2x Ø 350	305 x 266
52 series	1 289	757	657	1 530	455	581	2x Ø 350	305 x 266
MSH-QY-53 171 BSH-QG-53 215	1 289	755	657	1 930	455	581	2x Ø 350	305 x 266
53 series	1 289	755	657	1 930	455	581	3x Ø 350	305 x 266
54 series	1 289	755	657	2 430	455	581	4x Ø 350	305 x 266

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).


⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

⁽⁴⁾ Available static pressure of condensation.

* Available units with 400V 3N 50Hz power supply.

Installation scheme



* Minimum slope of the drain pipe of 20 % in negative temperature models.

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m.

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm²	
Manoeuvre	2 x 1 mm²	3 x 1 mm²
Defrost	2 x 1.5 mm² + G	4 x 1.5 mm² + G
Control pad	2 x 1 mm²	
Switch door*	2 x 1 mm²	
Door heater cable	2 x 1 mm² at NT	
Cold room light*	2 x 1 mm² + G	

* Optional not included. To know electrical interconnections of each model: see technical manual.


230V 50Hz / 400V 3N 50Hz | **High temperature** | R-134a / R-449A

	Axial version	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	Centrifugal version	Conden. air flow (m³/h)	ASP (mmca) ⁽⁴⁾	Price (€)
				9 °C		12 °C		15 °C													
		Series / Model	HP	Power supply	W	m³	W	m³	W												
R-134a	ASH-DY-11 015	1/2	230V	1 555	14	1 733	19	1 928	26	0.75	5.9	1 100	1/4"-1/2"	<2.0	48+32	32	3 851	ASH-CDY-11 015	575	8	4 271
	ASH-DY-11 026	3/4	230V	1 985	18	2 221	24	2 462	33	0.99	9.6	1 100	1/4"-1/2"	<2.0	51+32	30	4 163	ASH-CDY-11 026	575	8	4 619
	ASH-DY-11 033	1	230V	2 378	22	2 636	29	2 903	40	1.37	9.8	1 100	1/4"-5/8"	<2.0	51+32	33	4 672	ASH-CDY-11 033	575	8	5 186
	ASH-DY-22 033	1	230V	2 961	28	3 329	38	3 717	51	1.30	10.7	1 800	1/4"-5/8"	<2.5	54+45	34	5 129	ASH-CDY-22 033	1 000	12	5 690
	ASH-DY-22 053	1 1/2	230V *	3 738	35	4 169	48	4 625	63	2.04	13.3	1 800	3/8"-3/4"	<2.5	55+45	38	5 968	ASH-CDY-22 053	1 000	12	6 625
	ASH-DY-33 053	1 1/2	230V *	4 211	42	4 709	56	5 234	76	2.05	13.6	3 150	3/8"-3/4"	<4.0	74+65	39	6 318	ASH-CDY-33 053	1 500	14	7 017
	ASH-DY-33 074	2	230V *	5 502	58	6 148	77	6 830	104	2.74	17.6	3 150	3/8"-3/4"	<4.0	71+65	44	7 520	ASH-CDY-33 074	1 500	14	8 342
	ASH-DY-43 086	4	400V 3N	7 124	74	8 001	98	8 915	131	3.16	15.4	3 150	3/8"-7/8"	<6.5	107+65	48	8 568	ASH-CDY-43 086	3 500	10	9 512
	ASH-DY-43 108	5	400V 3N	8 216	85	9 177	111	10 206	148	3.76	18.4	3 150	3/8"-7/8"	<6.0	109+65	45	9 404	ASH-CDY-43 108	3 500	10	10 437
	ASH-DY-44 108	5	400V 3N	8 873	92	9 954	121	11 062	160	4.08	18.4	5 700	3/8"-7/8"	<6.0	112+70	45	10 306	ASH-CDY-44 108	3 500	10	11 438
ASH-DY-44 136	6 1/2	400V 3N	10 988	114	12 206	148	13 498	195	4.57	22.4	5 700	1/2"-1 1/8"	<6.0	112+70	44	11 336	ASH-CDY-44 136	3 500	10	12 583	
R-449A	ASH-DG-1 010	3/8	230V	1 237	10	1 341	14	1 455	19	0.77	5.2	1 100	1/4"-3/8"	<2.5	42+32	34	3 530	ASH-CDG-1 010	575	8	3 987
	ASH-DG-1 012	1/2	230V	1 419	12	1 535	16	1 664	22	0.82	6.2	1 100	1/4"-3/8"	<2.5	43+32	34	3 680	ASH-CDG-1 012	575	8	4 158
	ASH-DG-2 014	1/2	230V	1 829	16	1 965	22	2 109	29	0.95	7.4	1 100	1/4"-1/2"	<3.0	45+32	35	3 831	ASH-CDG-2 014	1 000	12	4 325
	ASH-DG-2 016	5/8	230V	2 014	18	2 169	24	2 338	33	1.03	8.3	1 100	1/4"-1/2"	<3.0	54+32	35	3 981	ASH-CDG-2 016	1 000	12	4 483
	ASH-DG-2 018	3/4	230V	2 309	22	2 481	28	2 675	38	1.23	9.6	1 100	1/4"-1/2"	<3.0	55+32	35	4 206	ASH-CDG-2 018	1 000	12	4 716
	ASH-DG-2 024	1	230V	2 988	27	3 228	36	3 480	47	1.61	11.8	1 800	3/8"-5/8"	<3.0	55+45	35	4 730	ASH-CDG-2 024	1 000	12	5 257
	ASH-DG-3 026	1 1/4	230V *	3 434	33	3 709	42	3 996	57	1.76	11.7	1 800	3/8"-5/8"	<3.5	74+45	37	5 074	ASH-CDG-3 026	1 500	14	5 690
	ASH-DG-3 034	1 1/2	230V *	4 376	41	4 692	54	5 048	72	2.26	16.5	1 800	3/8"-5/8"	<4.0	74+45	38	5 706	ASH-CDG-3 034	1 850	14	6 335
	ASH-DG-3 038	1 3/4	400V 3N	5 011	47	5 356	62	5 733	85	2.15	7.3	1 800	3/8"-5/8"	<4.0	71+45	40	6 615	ASH-CDG-3 038	1 850	14	7 284
	ASH-DG-4 048	2	400V 3N	6 667	66	7 151	86	7 673	115	2.98	10.2	3 150	1/2"-3/4"	<5.5	95+65	36	7 294	ASH-CDG-4 048	3 500	10	7 983
	ASH-DG-4 054	2 1/2	400V 3N	7 362	73	7 875	95	8 446	125	3.23	10.7	3 150	1/2"-3/4"	<6.0	96+65	36	7 740	ASH-CDG-4 054	3 500	10	8 430
	ASH-DG-4 060	3	400V 3N	8 369	82	8 974	105	9 614	140	3.96	12.2	3 800	1/2"-7/8"	<6.0	97+65	36	8 490	ASH-CDG-4 060	3 500	10	9 182
	ASH-DG-4 068	3 1/2	400V 3N	9 113	89	9 753	115	10 442	150	4.47	13.2	3 800	1/2"-7/8"	<6.0	98+65	35	9 306	ASH-CDG-4 068	3 500	10	9 998

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Crankcase heater. + 75 €
- Proportional control of condensing pressure:
Axial version (D): 3/33 and 4/43/44 series. + 304 €
Centrifugal version (CD): 4/43/44 series. + 486 €
- Vertical air flow (centrifugal version).
- Rectangular to circular exhaust air adaptor. + 123 €
- Built-in oil separator. + 716 €
- Anti-corrosion evaporator coil coating. + 6 %
- Anti-corrosion condenser coil coating. + 4 %
- Condensed water pump. + 148 €
- Larger sized multifunction electronic control. + 184 €

Dimensions

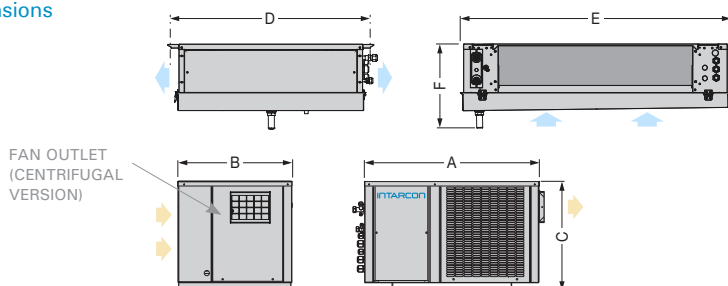

Dimensions (mm)		A	B	C	D	E	F	Evaporator fan	Fan outlet
R-134a	11 series	665	435	416	798	736	310	1x Ø 360	185 x 115
	22 series	835	435	500	798	1 086	310	2x Ø 360	230 x 130
	33 series	925	580	515	798	1 786	310	3x Ø 360	305 x 266
	43 series	1 000	615	585	798	1 786	310	3x Ø 360	305 x 266
	44 series	1 000	615	585	888	2 186	360	3x Ø 450	305 x 266
R-449A	1 series	665	435	416	798	736	310	1x Ø 360	185 x 115
	ASH-DG 2 014 to 2 018	835	435	500	798	736	310	1x Ø 360	230 x 130
	ASH-DG 2 024	835	435	500	798	1 086	310	2x Ø 360	230 x 130
	3 series	925	580	515	798	1 086	310	2x Ø 360	266 x 236
	4 series	1 000	615	585	798	1 786	310	3x Ø 360	305 x 266

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 12 °C (HT) and ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

⁽⁴⁾ Available static pressure of condensation

* Available units with 400V 3N 50Hz power supply.

Exhaust duct

Recommended size for 20 m long steel, PVC or fibreglass ducts (each elbow at 90° equals 5 m in length). For flexible or semi-flexible ducts use a larger size.

- 0 series: 200 x 150 mm or Ø 150 mm
- 1 series: 200 x 200 mm or Ø 150 mm
- 2 series: 250 x 150 mm or Ø 200 mm
- 3 series: 200 x 300 mm or Ø 250 mm
- 4 and 5 series: 350 x 400 mm or Ø 360 mm

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m (except series 4, 43 and 44).

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm²	
Manoeuvre	3 x 1 mm² + G	
Control pad	2 x 1 mm²	
Switch door*	2 x 1 mm²	
Cold room light*	2 x 1 mm² + G	

* Optional not included.

To know electrical interconnections of each model: see technical manual.



Split systems for small and medium size cold rooms at positive and negative temperature, composed of a low-noise condensing unit and a slim-type, cubic-type or double-flow evaporating unit.


Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ Minimal R-134A or R-449A refrigerant load.
- ▶ Hermetic reciprocating compressor.
- ▶ Double noise compressor insulation.
- ▶ Large surface L-shape condensing coil (straight for series 0 and 1).
- ▶ Low-speed condensing motor fans.
- ▶ Proportional control of condensing pressure (optional for -N version).
- ▶ High and low pressure switches.
- ▶ Discharge muffler (for models 1 HP or more) and crankcase heater.
- ▶ Liquid receiver.
- ▶ Refrigerant pre-load for 10 m of pipe.
- ▶ Evaporating unit: slim-type (-N version) or cubic-type (-Q version).
- ▶ Built-in thermostatic expansion valves and solenoid valves.
- ▶ Electrical heater defrost (except ASF series).
- ▶ Drain pan.
- ▶ Flare-type connections (up to 1/2"-3/4") and service valves.
- ▶ MCB protection.
- ▶ Multifunctional electronic control with remote keyboard and digital condensation control.
- ▶ Liquid injection system for negative temperature models with R-449A.

Installation scheme

Maximum vertical distance between units of 15 m if the condensing unit is placed at a higher level than the evaporating unit, and 6 m otherwise.

* 20 % minimum slope for drain tube for negative temperature models.

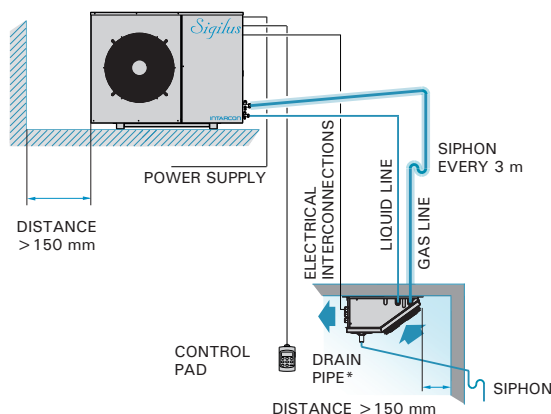

- ❄ Factory-tested systems with no need for on-site tests.
- ❄ Low-noise condensing unit.
- ❄ Tropicalised design for high ambient temperature up to 50 °C.
- ❄ Built-in thermostatic expansion valve.
- ❄ Proportional control of condensing pressure (optional for slim-type).
- ❄ Refrigerant pre-load.
- ❄ Units exempt from leak checks.

Control pad

Sigilus split systems feature XM670K electronic control as standard:



- Remote control keyboard with digital display.
- Temperature control with maximum and minimum temperature value recording.
- Possibility of interconnection and synchronization of up to 8 devices by LAN, managed from a single control.

Triple noise insulation

Sigilus units feature triple noise insulation:

- Noise insulated compressor compartment, separated from the air flow.
- Hermetic reciprocating compressor with insulation cover (three-phase models) and discharge muffler.
- Low-noise and low-speed fan on shock absorbing structure.

Proportional control of condensing pressure

Proportional control of condensing pressure, for prolonged operation at under low ambient temperature, standard for *Sigilus* series (optional for slim-type).

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m (hoses not included):

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm ²	
Manoeuvre	2 x 1 mm ²	3 x 1 mm ²
Defrost	2 x 1.5 mm ² + G	4 x 1.5 mm ² + G
Control pad	2 x 1 mm ²	
Switch door*	2 x 1 mm ²	
Door heater cable	2 x 1 mm ² at NT	
Cold room light*	2 x 1 mm ² + G	

* Optional not included.

To know electrical interconnections of each model: see technical manual.

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-134a / R-449A

	Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾								Input power (kW)	Max. current (A)	Evap. fan	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
		HP	Power supply	-5 °C		0 °C		5 °C		10 °C											
				W	m³	W	m³	W	m³	W	m³										
R-134a	MSF-NY-00 010	3/8	230V	497	2.9	637	5.0	788	8.8	945	13	0.41	4.2	1x Ø 172	300	350	1/4"-3/8"	< 1.5	46+12	28	2 806
	MSF-NY-00 015	1/2	230V	653	3.6	832	7.4	1 004	11	1 188	16	0.51	5.2	1x Ø 172	300	350	1/4"-3/8"	< 1.5	49+12	29	3 094
	MSF-NY-11 015	1/2	230V	805	4.7	1 031	10	1 296	14	1 582	28	0.56	5.6	1x Ø 200	550	1 700	1/4"-1/2"	< 2.0	57+16	34	3 238
	MSF-NY-11 026	3/4	230V	1 076	9.0	1 412	16	1 738	25	2 084	40	0.80	9.2	1x Ø 200	550	1 700	1/4"-1/2"	< 2.0	65+16	34	3 932
	MSF-NY-12 033	1	230V	1 475	13	1 859	20	2 289	35	2 741	57	1.02	9.7	2x Ø 200	1 050	1 700	1/4"-5/8"	< 2.0	67+24	34	4 913
	MSF-NY-12 053	1 1/2	230V *	1 811	22	2 347	33	2 872	50	3 439	79	1.42	12.3	2x Ø 200	1 050	1 700	1/4"-5/8"	< 2.0	77+24	35	5 761
	MSF-NY-13 074	2	230V *	2 772	30	3 528	50	4 363	76	5 229	125	1.94	17.2	3x Ø 254	1 725	1 700	1/4"-3/4"	< 3.5	79+45	37	6 273
	MSF-NY-23 086	4	400V 3N	3 355	39	4 384	65	5 376	108	6 437	160	2.18	14.1	3x Ø 254	1 725	3 700	3/8"-7/8"	< 4.5	96+45	38	6 984
	MSF-NY-24 108	5	400V 3N	4 347	58	5 649	90	6 920	138	8 316	220	2.83	18.2	4x Ø 300	3 100	3 700	3/8"-7/8"	< 5.0	98+45	35	8 210
	MSF-NY-24 136	6 1/2	400V 3N	5 486	75	6 899	110	8 363	150	9 949	280	3.55	22.2	4x Ø 300	3 100	3 700	3/8"-1 1/8"	< 5.5	101+55	34	10 260
	MSF-NY-34 171	8	400V 3N	6 080	88	7 613	130	9 240	200	10 978	350	4.16	25.2	4x Ø 300	3 100	4 000	3/8"-1 1/8"	< 5.5	140+55	40	11 693
R-449A	MSF-NG-0 008	1/3	230V	611	2.9	759	5.0	915	8.8	1 103	13	0.43	5.1	1x Ø 172	300	350	1/4"-3/8"	< 1.5	47+12	29	2 643
	MSF-NG-0 010	3/8	230V	739	3.6	894	6.1	1 056	10	1 254	15	0.53	4.8	1x Ø 172	300	350	1/4"-3/8"	< 1.5	49+12	29	2 915
	MSF-NG-0 012	1/2	230V	818	4.7	981	7.4	1 153	12	1 358	21	0.63	5.6	1x Ø 172	300	350	1/4"-3/8"	< 1.5	50+12	29	3 051
	MSF-NG-1 014	1/2	230V	882	8.0	1 095	12	1 322	20	1 585	34	0.77	6.5	1x Ø 200	550	1 700	1/4"-1/2"	< 2.0	59+16	34	3 401
	MSF-NG-1 016	5/8	230V	972	10	1 210	15	1 462	24	1 759	40	0.81	7.4	1x Ø 200	550	1 700	1/4"-1/2"	< 2.0	67+16	34	3 706
	MSF-NG-1 018	3/4	230V	1 397	12	1 649	19	1 915	28	2 245	45	0.94	8.7	1x Ø 200	550	1 700	1/4"-1/2"	< 2.0	68+16	34	4 119
	MSF-NG-2 024	1	230V	1 513	14	1 958	22	2 420	35	2 958	57	1.26	11.1	2x Ø 200	1 050	1 700	1/4"-1/2"	< 2.5	82+24	34	4 630
	MSF-NG-2 026	1 1/4	230V *	1 712	16	2 147	25	2 611	39	3 157	64	1.44	11.5	2x Ø 200	1 050	1 700	1/4"-1/2"	< 2.5	83+24	34	4 837
	MSF-NG-2 034	1 1/2	230V *	2 120	21	2 606	33	3 117	50	3 730	79	1.83	16.1	2x Ø 200	1 050	1 700	1/4"-5/8"	< 2.5	83+24	35	5 127
	MSF-NG-3 038	1 3/4	400V 3N	2 770	29	3 394	46	4 078	71	4 894	112	1.89	8.1	3x Ø 254	1 725	3 200	1/4"-5/8"	< 3.0	82+45	29	5 803
	MSF-NG-4 048	2	400V 3N	3 368	39	4 231	62	5 158	92	6 225	145	2.34	9.6	3x Ø 254	1 725	3 700	3/8"-3/4"	< 4.5	84+45	26	6 306
		MSF-NG-4 054	2 1/2	400V 3N	3 792	47	4 671	70	5 640	105	6 780	160	2.54	10.1	3x Ø 254	1 725	3 700	3/8"-3/4"	< 4.5	85+45	26

230V 50Hz / 400V 3N 50Hz | Negative temperature | R-449A / R-452A

	Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾								Input power (kW)	Max. current (A)	Evap. fan	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
		HP	Power supply	-25 °C		-20 °C		-15 °C													
				W	m³	W	m³	W	m³												
R-449A	BSF-NG-1 026	3/4	230V	763	3.2	952	7.0	1 155	13	0.82	8.5	1x Ø 200	550	1 700	1/4"-1/2"	< 2.0	67+16	34	4 167		
	BSF-NG-2 034	1 1/4	230V	930	3.9	1 107	8.1	1 437	15	1.18	11.3	2x Ø 200	1 050	1 700	1/4"-1/2"	< 2.0	83+16	34	4 422		
	BSF-NG-2 055	1 3/4	230V *	1 260	9.0	1 710	16	2 190	30	1.70	17.5	2x Ø 200	1 050	1 700	1/4"-5/8"	< 2.5	85+24	36	5 414		
	BSF-NG-2 075	2 1/2	230V *	1 655	13	2 130	22	2 625	38	2.10	25.5	2x Ø 200	1 050	1 700	1/4"-5/8"	< 3.5	90+24	37	5 705		
	BSF-NG-3 075	2 1/2	230V *	1 755	14	2 450	27	3 080	48	2.30	26.3	3x Ø 254	1 725	1 700	1/4"-5/8"	< 3.5	90+45	37	6 118		
R-452A	BSF-NB-4 096	3 1/2	400V 3N	2 139	19	2 670	39	3 523	68	2.48	12.0	3x Ø 254	1 725	3 700	3/8"-3/4"	< 4.5	97+45	39	7 929		
	BSF-NB-4 108	4	400V 3N	2 463	29	3 276	50	4 118	78	2.82	14.6	3x Ø 254	1 725	3 700	3/8"-7/8"	< 5.0	97+45	37	8 583		
	BSF-NB-4 136	5	400V 3N	2 949	37	3 775	61	4 648	100	3.64	16.8	3x Ø 254	1 725	3 700	3/8"-7/8"	< 5.0	100+45	32	9 259		

Options

- Change to 400V 3N 50Hz power supply.
- Proportional control of condensing pressure through fan speed variation (except 0 series).
- Coil protection grille.
- Built-in oil separator.
- Anti-corrosion evaporator coil coating.
- Anti-corrosion condenser coil coating.
- Larger sized multifunction electronic control.

+ 5 %
+ 304 €
+ 112 €
+ 716 €
+ 6 %
+ 4 %
+ 184 €


⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), and ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

Dimensions

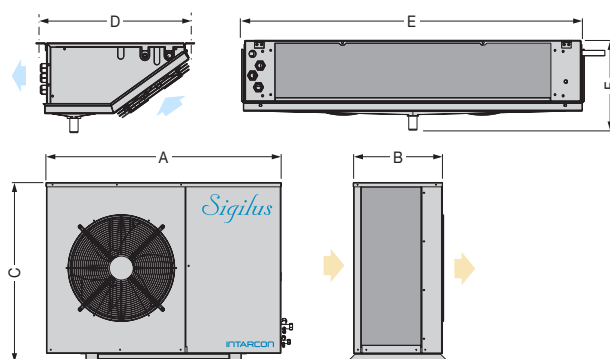

Dimensions (mm)	A	B	C	D	E	F	Evaporator fans
series 0 y 00	671	308	442	417	549	185	1x Ø 172
series 1 y 11	1 030	380	577	430	643	235	1x Ø 200
series 2 y 12	1 030	380	577	430	993	235	2x Ø 200
series 3 y 13	1 030	380	577	508	1 691	235	3x Ø 254
series 4 y 23	1 080	416	827	508	1 691	235	3x Ø 254
serie 24	1 080	416	827	547	2 064	285	4x Ø 300
serie 34	1 150	487	1 097	547	2 064	285	4x Ø 300

230V 50Hz / 400V 3N 50Hz | Positive temperature | R-134a / R-449A

	Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾								Input power (kW)	Max. current (A)	Fan evap.	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
		HP	Power supply	-5 °C		0 °C		5 °C		10 °C											
				W	m³	W	m³	W	m³	W	m³										
R-134a	MSF-QY-10 068	3 1/2	400V 3N	3 281	42	4 106	60	4 998	69	5 985	110	1.98	12.8	1x Ø 350	2 100	3 200	1/4"-3/4"	< 4.0	82+43	25	7 511
	MSF-QY-20 086	4	400V 3N	3 523	45	4 442	65	5 429	75	6 515	120	2.19	14.8	1x Ø 350	2 100	3 700	3/8"-7/8"	< 4.5	96+43	38	8 130
	MSF-QY-21 108	5	400V 3N	4 226	58	5 334	81	6 521	130	7 807	210	2.56	16.3	1x Ø 350	2 700	3 700	3/8"-7/8"	< 5.0	98+56	35	8 864
	MSF-QY-22 136	6 1/2	400V 3N	5 749	80	7 277	120	8 831	186	10 553	290	3.63	21.1	2x Ø 350	4 150	3 700	3/8"-1 1/8"	< 5.0	101+72	34	10 683
	MSF-QY-33 171	8	400V 3N	6 746	100	8 484	172	10 295	197	12 306	354	4.42	24.1	2x Ø 350	5 200	4 000	3/8"-1 1/8"	< 7.0	140+89	40	12 176
	MSF-QY-33 215	10	400V 3N	8 426	130	10 563	241	12 857	268	15 419	440	5.24	30.5	3x Ø 350	6 200	6 500	3/8"-1 1/8"	< 7.5	147+94	39	13 402
	MSF-QY-34 271	13	400V 3N	11 099	165	13 776	256	16 622	346	19 777	550	7.19	40.2	4x Ø 350	8 300	6 500	1/2"-1 3/8"	< 8.5	152+118	38	16 972
R-449A	MSF-QG-10 038	1 3/4	400V 3N	3 280	31	3 919	48	4 625	75	5 472	120	1.77	7.4	1x Ø 350	2 100	3 200	1/4"-5/8"	< 3.0	82+43	29	6 719
	MSF-QG-20 048	2	400V 3N	3 964	43	4 736	63	5 572	95	6 605	150	2.21	8.8	1x Ø 350	2 100	3 700	3/8"-3/4"	< 5.0	84+43	26	7 269
	MSF-QG-20 054	2 1/2	400V 3N	4 395	48	5 197	72	6 078	110	7 158	170	2.38	9.4	1x Ø 350	2 100	3 700	3/8"-3/4"	< 5.0	85+43	26	7 583
	MSF-QG-21 060	3	400V 3N	5 081	61	6 032	89	7 055	130	8 328	200	2.84	10.4	1x Ø 350	2 700	3 700	3/8"-3/4"	< 5.0	88+56	26	8 269
	MSF-QG-21 068	3 1/2	400V 3N	5 519	78	6 528	110	7 601	160	8 942	250	3.21	11.4	1x Ø 350	2 700	3 700	3/8"-3/4"	< 5.0	88+56	25	9 553
	MSF-QG-32 086	4	400V 3N	6 787	91	8 180	130	9 707	190	11 545	300	4.13	13.6	2x Ø 350	4 150	4 000	1/2"-7/8"	< 7.0	115+72	38	10 888
	MSF-QG-32 108	5	400V 3N	8 623	125	10 181	175	11 880	255	13 969	400	5.05	16.7	2x Ø 350	4 150	6 500	1/2"-7/8"	< 7.0	120+72	35	11 985
	MSF-QG-43 136	6 1/2	400V 3N	11 105	160	13 146	220	15 399	320	18 145	500	6.63	21.5	3x Ø 350	6 200	7 000	1/2"-1 1/8"	< 10.0	135+89	34	14 254
	MSF-QG-44 160	8	400V 3N	11 597	170	14 009	230	16 660	340	19 806	530	7.59	26.0	4x Ø 350	8 300	7 000	5/8"-1 1/8"	< 10.0	157+118	40	16 730


230V 50Hz / 400V 3N 50Hz | Negative temperature | R-449A / R-452A

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Fan evap.	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)	
	HP	Power supply	-25 °C		-20 °C		-15 °C												
			W	m³	W	m³	W	m³											
R-452A	BSF-QG-10 075	2 1/2	230V *	1 760	14	2 465	27	3 110	48	2.30	25.1	1x Ø 350	2 100	1 700	1/4"-5/8"	< 3.0	90+43	37	6 585
	BSF-QB-20 096	3 1/2	400V 3N	2 456	20	3 135	43	3 881	74	2.39	11.5	1x Ø 350	2 100	3 700	1/4"-3/4"	< 4.0	97+43	39	8 964
	BSF-QB-21 108	4	400V 3N	3 023	28	3 883	50	4 772	86	2.76	13.5	1x Ø 350	2 700	3 700	1/4"-7/8"	< 5.0	97+56	37	9 650
	BSF-QB-22 136	5	400V 3N	4 159	53	5 116	83	6 146	130	4.02	16.4	2x Ø 350	4 150	3 700	3/8"-1 1/8"	< 5.0	97+72	32	11 477
	BSF-QB-33 215	7 1/2	400V 3N	5 970	80	7 605	130	9 334	200	5.63	25.8	3x Ø 350	6 200	6 500	1/2"-1 1/8"	< 7.5	147+94	39	14 506
	BSF-QB-34 271	10	400V 3N	8 005	120	9 839	185	11 798	230	7.15	28.2	4x Ø 350	8 300	6 500	1/2"-1 3/8"	< 8.5	147+118	39	16 247

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Coil protection grille. + 112 €
- Built-in oil separator. + 716 €
- Anti-corrosion evaporator coil coating. + 6 %
- Anti-corrosion condenser coil coating. + 4 %
- Larger sized multifunction electronic control. + 184 €

Dimensions

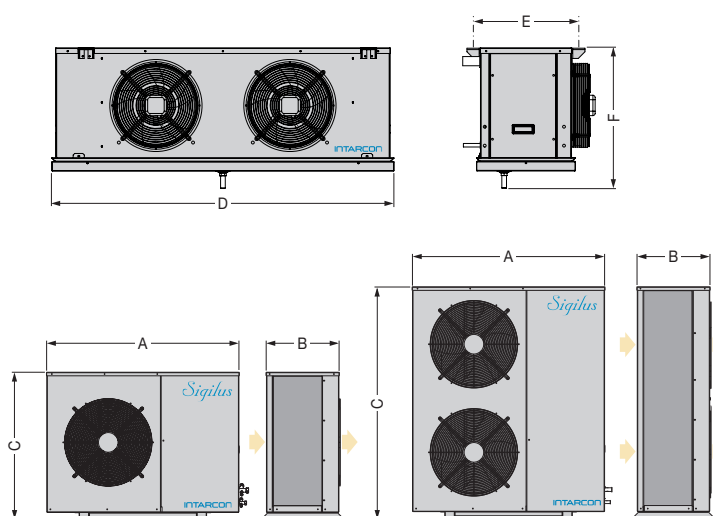

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT), and ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m (except series 43 and 44).

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm²	
Manoeuvre	2 x 1 mm²	3 x 1 mm²
Defrost	2 x 1.5 mm² + G	4 x 1.5 mm² + G
Control pad	2 x 1 mm²	
Switch door*	2 x 1 mm²	
Door heater cable	2 x 1 mm² at NT	
Cold room light*	2 x 1 mm² + G	

* Optional not included.

To know electrical interconnections of each model: see technical manual.

Dimensions (mm)	A	B	C	D	E	F
10 series	1 030	380	577	880	455	581
20 series	1 080	416	827	880	455	581
21 series	1 080	416	827	1 230	455	581
22 series	1 080	416	827	1 530	455	581
32 series	1 150	487	1 097	1 530	455	581
33 series	1 150	487	1 097	1 930	455	581
34 series	1 150	487	1 097	2 430	455	581
43 series	1 150	487	1 346	1 930	455	581
44 series	1 150	487	1 346	2 430	455	581


230V 50Hz / 400V 3N 50Hz | **High temperature** | R-134a / R-449A

	Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾						Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
		HP	Power supply	9 °C		12 °C		15 °C										
				W	m³	W	m³	W	m³									
R-134a	ASF-DY-11 015	1/2	230V	1 687	16	1 922	21	2 160	29	0.69	4.7	1 100	1 700	1/4"-1/2"	< 2.5	57+32	34	4 450
	ASF-DY-11 026	3/4	230V	2 342	23	2 678	30	2 977	41	1.05	8.4	1 100	1 700	1/4"-1/2"	< 2.5	65+32	34	4 767
	ASF-DY-12 033	1	230V	2 840	27	3 176	36	3 533	48	1.33	10.4	1 800	1 700	1/4"-5/8"	< 3.0	67+45	34	5 366
	ASF-DY-13 053	1 1/2	230V *	4 226	42	4 730	56	5 271	72	2.04	13.6	3 150	1 700	3/8"-3/4"	< 4.0	77+65	35	6 747
	ASF-DY-13 074	2	230V *	6 053	62	6 825	83	7 634	112	2.61	17.6	3 150	3 200	3/8"-3/4"	< 4.5	79+65	34	7 841
	ASF-DY-23 086	4	400V 3N	7 151	75	8 033	99	8 957	131	2.90	14.4	3 150	3 700	3/8"-7/8"	< 5.0	96+65	38	8 774
	ASF-DY-24 108	5	400V 3N	8 936	99	10 028	122	11 146	165	3.80	17.5	5 700	3 700	3/8"-7/8"	< 5.5	98+70	35	9 729
	ASF-DY-24 136	6 1/2	400V 3N	11 093	128	12 332	168	13 645	224	5.00	21.2	5 700	3 700	1/2"-1 1/8"	< 6.0	98+70	34	12 420
	ASF-DY-34 171	8	400V 3N	13 424	146	14 989	186	16 669	251	5.88	25.2	5 700	6 500	1/2"-1 1/8"	< 6.0	120+70	40	14 771
	ASF-DY-44 215	10	400V 3N	15 771	171	17 593	218	19 546	294	6.61	30.2	5 700	7 000	1/2"-1 3/8"	< 9.5	120+70	39	16 244
R-449A	ASF-DG-1 016	5/8	230V	2 161	19	2 387	25	2 635	35	0.99	7.5	1 100	1 700	1/4"-1/2"	< 2.5	67+32	38	4 254
	ASF-DG-1 018	3/4	230V	2 462	23	2 709	30	2 961	42	1.18	8.8	1 100	1 700	1/4"-1/2"	< 2.5	68+32	35	4 559
	ASF-DG-1 024	1	230V	3 225	29	3 539	39	3 879	51	1.53	11.3	1 800	1 700	3/8"-5/8"	< 3.5	82+45	34	5 130
	ASF-DG-1 026	1 1/4	230V *	3 709	35	4 078	46	4 466	63	1.75	12.0	1 800	3 200	3/8"-5/8"	< 3.5	83+45	40	5 361
	ASF-DG-1 034	1 1/2	230V *	4 607	43	5 046	58	5 494	77	2.24	16.6	1 800	3 200	3/8"-5/8"	< 3.5	83+45	39	6 088
	ASF-DG-1 038	1 3/4	400V 3N	5 393	52	5 885	68	6 410	91	2.20	7.8	3 150	3 200	3/8"-5/8"	< 4.0	82+65	29	6 886
	ASF-DG-2 048	2	400V 3N	6 722	67	7 343	87	7 962	115	2.76	9.3	3 150	3 700	1/2"-3/4"	< 5.5	84+65	26	7 623
	ASF-DG-2 054	2 1/2	400V 3N	7 447	75	8 113	97	8 793	130	3.00	9.8	3 150	3 700	1/2"-3/4"	< 5.5	85+65	26	7 923
	ASF-DG-3 060	3	400V 3N	8 824	94	9 673	115	10 551	155	3.60	11.9	3 150	6 500	1/2"-7/8"	< 6.0	88+65	26	8 782
	ASF-DG-3 068	3 1/2	400V 3N	9 662	98	10 578	125	11 512	165	4.19	12.9	3 150	6 500	1/2"-7/8"	< 6.0	88+65	25	10 350
	ASF-DG-4 086	4	400V 3N	11 687	120	12 829	155	14 001	205	4.90	15.2	5 700	7 000	5/8"-1 1/8"	< 9.0	115+70	38	12 080
	ASF-DG-4 108	5	400V 3N	14 416	150	15 702	190	17 068	255	6.40	18.2	5 700	7 000	5/8"-1 1/8"	< 8.5	120+70	35	13 334

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Proportional control of condensing pressure through fan speed variation (already included in 2/23 series and above). + 304 €
- Coil protection grille. + 112 €
- Built-in oil separator. + 716 €
- Anti-corrosion evaporator coil coating. + 6 %
- Anti-corrosion condenser coil coating. + 4 %
- Condensed water pump. + 148 €
- Larger sized multifunction electronic control. + 184 €

Dimensions

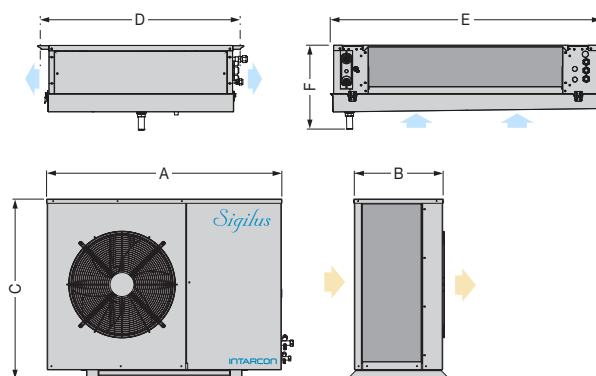

	Dimensions (mm)	A	B	C	D	E	F	Evaporator fans
R-134a	11 series	1 030	380	577	798	736	310	1x Ø 360
	12 series	1 030	380	577	798	1 086	310	2x Ø 360
	13 series	1 030	380	577	798	1 786	310	3x Ø 360
	23 series	1 080	416	827	798	1 786	310	3x Ø 360
	24 series	1 080	416	827	888	2 186	360	3x Ø 450
	34 series	1 150	487	1 097	888	2 186	360	3x Ø 450
	44 series	1 150	487	1 346	888	2 186	360	3x Ø 450
R-449A	ASF-DG-1 016 and 1 018	1 030	380	577	798	736	310	1x Ø 360
	ASF-DG-1 024 to 1 034	1 030	380	577	798	1 086	310	2x Ø 360
	ASF-DG-1 038	1 030	380	577	798	1 786	310	3x Ø 360
	2 series	1 080	416	827	798	1 786	310	3x Ø 360
	3 series	1 150	487	1 097	798	1 786	310	3x Ø 360
	4 series	1 150	487	1 346	888	2 186	360	3x Ø 450

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 12 °C (HT) ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m (except series 4 and 44).

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm ²	
Manoeuvre	3 x 1 mm ² + G	5 x 1 mm ² + G
Control pad	2 x 1 mm ²	
Condensed water pump*	3 x 1 mm ²	

* Optional not included.

To know electrical interconnections of each model: see technical manual.

System for meat preservation and maturation



Split refrigeration systems for positive temperature applications, featuring a quasi-static evaporating unit with double air flow, and an axial low-noise or centrifugal condensing unit.


Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ Minimal R-134a or R-449A refrigerant load.
- ▶ Hermetic reciprocating compressor.
- ▶ Quasi-static evaporating unit with double air flow and axial motor fans at very low speed.
- ▶ High and low pressure switches.
- ▶ Built-in solenoid valve.
- ▶ Built-in thermostatic expansion valve.
- ▶ Electrical heater defrost.
- ▶ Drain pan.
- ▶ Flare-type connections (up to 1/2"-3/4") and service valves.
- ▶ MCB protection.
- ▶ Liquid receiver.
- ▶ Refrigerant pre-load for 10 m piping.
- ▶ Multifunction electronic control with remote keyboard and digital regulation of condensing pressure.

Series

- ▶ **MSF-U:** Split systems with low-noise condensing unit and quasi-static double-flow evaporating unit.
- ▶ **MSH-CU:** Split systems with centrifugal condensing unit and quasi-static double-flow evaporating unit.

Installation scheme

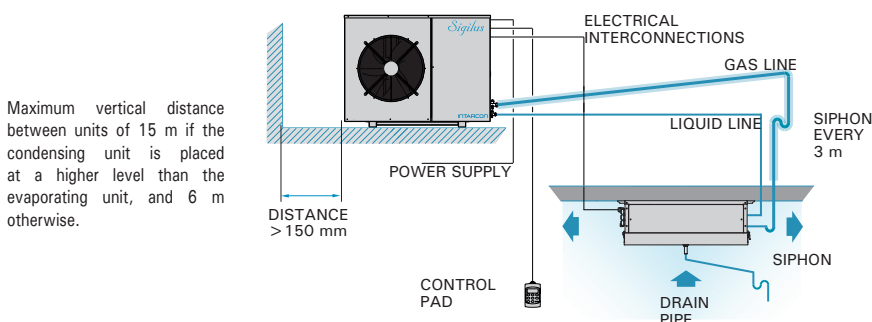

- ❄ **Quasi-static double-flow evaporating unit for very low air speed, specially designed for meat preservation.**
- ❄ **Factory-tested systems with no need for on-site tests.**
- ❄ **Refrigerant pre-load.**
- ❄ **Units exempt from leak checks.**

Meat preservation

Quasi-static split systems are specifically recommended for unpacked meat preservation in cold rooms at temperature around 0 °C.

Double airflow evaporating units feature fans operating at a minimum speed to emulate the natural air convection inside the cold room, just as in a static evaporating unit.

Minimum air speed prevents moisture loss from the stored goods and keeps the correct level of humidity inside the cold room to prevent bacterial growth on the meat surface.



Meat maturation (optional)

Maturation of meat requires the control of the relative humidity of the cold room in a certain range.

Units for maturation of meat, are configured for cold rooms in the environment of 0 °C and in the range of 40 % to 95 % of relative humidity.

These unit incorporate an advanced electronic regulation to control of the temperature and humidity inside the cold room, with dehumidification and humidification and functions with steam humidification of 3 kg / h capacity, consisting of: steam lances integrated in the evaporator unit, a submerged electrode generating cylinder with feed and water purge valves, and electronic relative humidity controller in the cold room.



Crankcase heater

As standard on *Sigilux* MSF units and optional on MSH series. Its inclusion in outdoor units is recommended.


230V 50Hz / 400V 3N 50Hz | Positive temperature - Meat preservation and maturation | R-134a / R-449A

	Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾								Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas Cooling Connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
		HP	Power supply	-5 °C		0 °C		5 °C		10 °C										
				W	m³	W	m³	W	m³	W	m³									
R-134a	MSF-UY-11 026	3/4	230V	1 145	7.6	1 449	15	1 785	24	2 153	41	0,83	9.4	600	1 700	1/4"-1/2"	< 2.0	65+32	34	4 519
	MSF-UY-12 033	1	230V	1 428	12	1 764	20	2 147	34	2 562	53	0,96	10.0	700	1 700	1/4"-5/8"	< 3.0	67+45	34	5 385
	MSF-UY-13 053	1 1/2	230V *	2 100	22	2 657	40	3 255	56	3 938	86	1,50	12.6	1 325	1 700	1/4"-3/4"	< 3.5	77+65	35	6 729
	MSF-UY-13 074	2	230V *	2 741	30	3 434	48	4 190	74	5 009	120	1,86	16.9	1 325	1 700	1/4"-3/4"	< 4.5	79+65	37	7 691
	MSF-UY-23 086	4	400V 3N	3 308	40	4 158	62	5 114	99	6 132	154	2,08	13.4	1 325	3 700	3/8"-7/8"	< 5.5	96+65	38	8 408
	MSF-UY-24 108	5	400V 3N	4 431	54	5 576	87	6 825	134	8 243	209	2,74	16.9	2 600	3 700	3/8"-7/8"	< 7.5	98+65	38	9 605
	MSF-UY-24 136	6 1/2	400V 3N	5 444	72	6 815	108	8 306	162	10 038	268	3,44	20.9	2 600	3 700	3/8"-1 1/8"	< 7.5	101+65	34	10 784
	MSF-UY-34 171	8	400V 3N	11 151	153	7 539	123	9 293	181	11 146	299	4,06	23.9	2 600	4 000	3/8"-1 1/8"	< 8.0	140+65	40	12 777
R-449A	MSF-UG-1 016	5/8	230V	1 215	9.5	1 483	15	1 772	25	2 101	40	0,89	7.5	600	1 700	1/4"-1/2"	< 2.5	67+32	34	4 299
	MSF-UG-1 018	3/4	230V	1 421	12	1 720	19	2 050	30	2 410	48	1,03	8.8	600	1 700	1/4"-1/2"	< 2.5	68+32	34	4 941
	MSF-UG-1 024	1	230V	1 648	15	1 998	24	2 390	37	2 812	59	1,19	11.0	700	1 700	3/8"-5/8"	< 3.5	82+43	34	5 304
	MSF-UG-1 034	1 1/2	230V *	2 235	23	2 699	35	3 193	54	3 739	84	1,84	16.0	700	1 700	3/8"-5/8"	< 3.5	83+43	35	6 047
	MSF-UG-1 038	1 3/4	400V 3N	2 833	31	3 451	47	4 130	72	4 882	115	1,85	7.4	1 325	3 200	3/8"-5/8"	< 4.5	82+63	29	7 076
	MSF-UG-2 054	2 1/2	400V 3N	3 784	47	4 600	70	5 447	105	6 426	160	2,38	9.4	1 325	3 700	3/8"-3/4"	< 5.0	85+63	26	7 837
	MSF-UG-2 068	3 1/2	400V 3N	4 825	64	5 794	93	6 834	135	8 017	205	3,35	11.4	1 325	3 700	1/2"-3/4"	< 7.0	88+63	25	9 689
	MSF-UG-3 086	4	400V 3N	6 027	83	7 257	120	8 579	175	10 060	270	4,23	13.9	2 600	4 000	1/2"-7/8"	< 7.0	115+66	38	11 479

Options

- Change to 400V 3N 50Hz power supply. + 5 %
 - Proportional control of condensing pressure through fan speed variation (already included in 2/23 series and above). + 304 €
 - Coil protection grille. + 112 €
 - Built-in oil separator. + 716 €
 - Condenser coil polyurethane anti-corrosion treatment. + 4 %
 - Control for maturation of meat with humidification and dehumidification functions.
 - Touch screen display.
- By request
By request

Dimensions

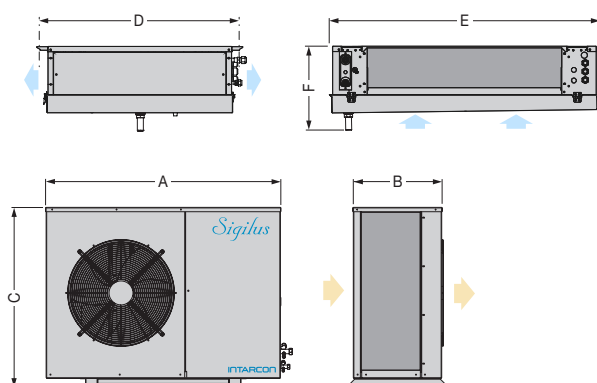

Dimensions (mm)		A	B	C	D	E	F	Evaporator fans
R-134a	11 series	1 030	380	577	798	736	310	1x Ø 360
	12 series	1 030	380	577	798	1 086	310	1x Ø 360
	13 series	1 030	380	577	798	1 786	310	2x Ø 360
	23 series	1 080	416	827	798	1 786	310	2x Ø 360
	24 series	1 080	416	827	888	2 186	360	2x Ø 450
	34 series	1 150	487	1 097	888	2 186	360	2x Ø 450
R-449A	MSF-UG-1 016 and 1 018	1 030	380	577	798	736	310	1x Ø 360
	MSF-UG-1 024 and 1 034	1 030	380	577	798	1 086	310	1x Ø 360
	MSF-UG-1 038	1 030	380	577	798	1 786	310	2x Ø 360
	MSF-UG-2 054 and 2 068	1 080	416	827	798	1 786	310	2x Ø 360
	MSF-UG-3 086	1 150	487	1 097	888	2 186	360	2x Ø 450

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C and ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

Centrifugal version (MSH-CU series)

Quasi-static split systems are also available with centrifugal condensing units.

Series / Model		HP	Cooling capacity		Price (€)
			0 °C / 35 °C		
			W	m³	
R-134a	MSH-CUY-11 026	3/4	1 281	12	4 245
	MSH-CUY-11 033	1	1 517	15	5 163
	MSH-CUY-22 033	1	1 811	22	5 514
	MSH-CUY-22 053	1 1/2	2 174	28	6 081
	MSH-CUY-33 053	1 1/2	2 657	35	6 665
	MSH-CUY-33 074	2	3 402	47	7 461
	MSH-CUY-43 086	4	4 153	70	8 973
	MSH-CUY-43 108	5	5 219	84	9 802
	MSH-CUY-44 108	5	5 555	89	10 554
	MSH-CUY-44 136	6 1/2	6 773	108	13 085
R-449A	MSH-CUG-1 016	5/8	1 349	13	4 039
	MSH-CUG-1 018	3/4	1 545	16	4 911
	MSH-CUG-2 024	1	1 978	23	5 245
	MSH-CUG-2 034	1 1/2	2 627	34	5 989
	MSH-CUG-3 038	1 3/4	3 265	44	6 870
	MSH-CUG-4 054	2 1/4	4 590	69	8 060
	MSH-CUG-4 068	3 1/2	5 783	93	9 478

Condensing units features as in pages 21 up to 22.

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m.

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm²	
Manoeuvre	2 x 1 mm²	3 x 1 mm²
Defrost	2 x 1.5 mm² + G	4 x 1.5 mm² + G
Control pad	2 x 1 mm²	
Switch door*	2 x 1 mm²	
Cold room light*	2 x 1 mm² + G	

* Optional not included.

To know electrical interconnections of each model: see technical manual.

High humidity



Split refrigeration systems for high relative humidity applications in a positive temperature range, featuring an evaporating unit with double air flow, and a low-noise or centrifugal condensing unit.

Features


- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ Minimal R-134a or R-449A refrigerant load.
- ▶ Hermetic reciprocating compressor.
- ▶ High and low pressure switches.
- ▶ Oversized double air flow evaporating unit designed for relative humidity control between 60 % and 95 %*.
- ▶ Built-in solenoid and thermostatic expansion valves (evaporating unit).
- ▶ Air defrost.
- ▶ Drain pan.
- ▶ Flare-type connections (up to 1/2"-3/4") with service valves.
- ▶ MCB protection.
- ▶ Liquid receiver.
- ▶ Refrigerant pre-load for 10 m piping.
- ▶ Multifunction electronic control with temperature and humidity control and remote keyboard.

Series

- ▶ **HSF-D:** Split systems with low-noise condensing unit and high humidity double-flow evaporating unit.
- ▶ **HSH-CD:** Split systems with centrifugal condensing unit and high humidity double-flow evaporating unit.

Installation scheme

Maximum vertical distance between units of 15 m if the condensing unit is placed at a higher level than the evaporating unit, and 6 m otherwise.

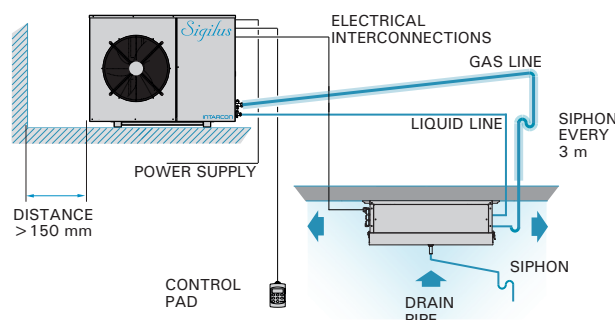

- ❄ **Low-profile double-flow evaporating unit, oversized for high relative humidity applications.**
- ❄ **Passive humidity control (humidity regulation between 60 and 95 %).***
- ❄ **Factory-tested systems with no need for on-site tests.**
- ❄ **Refrigerant pre-load.**
- ❄ **Units exempt from leak checks.**

Conservation at controlled relative humidity

The preservation of certain products, such as fruits, vegetables or cut flowers, requires control of the relative humidity in the cold room within a certain range.

These unit adjusted for high relative humidity are especially suitable for fruit and vegetable products preservation cold room.

The evaporators have a double air discharge through oversized coils to obtain up to a high level of relative humidity inside the chamber at around 95 %, avoiding loss of humidity and weight of the product.



Electronic temperature and humidity control

The unit incorporates an advanced electronic regulation for the control of the temperature and humidity inside the cold room.

- Multifunction remote digital control with temperature and relative humidity display.
- Relative humidity control in the regulation range from 60 % to 95 %*.
- Optionally, active humidification kits with steam lances and dehumidification and stove kits are integrated.

* The humidity regulation in the cold room is carried out passively, acting on the evaporator flow, without water vapour. The actual range of humidity regulation depends largely on the conditions of the cold room, absolute outside humidity and type of product.

Electrical interconnections

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m.

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm ²	
Manoeuvre	3 x 1 mm ² + G	5 x 1 mm ² + G
Control pad	2 x 1 mm ²	

To know electrical interconnections of each model: see technical manual.


230V 50Hz / 400V 3N 50Hz | Positive temperature - Humidity control | R-134a / R-449A

Series / Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature ⁽¹⁾				Input power (kW)	Max. current (A)	Evap. air flow (m³/h)	Conden. air flow (m³/h)	Liq-Gas cooling connection	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
	HP	Power supply	5 °C RH 95 % W	10 °C RH 95 % m³	10 °C RH 95 % W	10 °C RH 95 % m³									
R-134a	HSF-DY-12 015	1/2 230V	1 544	22	1 906	38	0.74	6.5	1 800	1 700	1/4"-1/2"	< 2.0	57+32	34	4 612
	HSF-DY-12 026	3/4 230V	2 116	32	2 594	53	1.06	10.2	1 800	1 700	1/4"-1/2"	< 2.0	65+32	34	4 982
	HSF-DY-13 033	1 230V	2 620	43	3 192	73	1.30	11.0	3 150	1 700	1/4"-1/2"	< 2.5	67+45	34	6 128
	HSF-DY-13 053	1 1/2 230V *	3 486	64	4 237	103	1.90	13.6	3 150	1 700	1/4"-5/8"	< 3.0	77+65	35	7 296
	HSF-DY-14 074	2 230V *	4 977	91	6 090	148	2.57	17.7	5 700	1 700	1/4"-3/4"	< 5.0	79+65	37	8 573
	HSF-DY-24 086	4 400V 3N	6 773	134	8 311	217	2.87	14.5	5 700	3 700	3/8"-7/8"	< 6.0	96+65	38	9 670
	HSF-DY-24 108	5 400V 3N	7 865	158	9 713	263	3.40	17.5	5 700	3 700	3/8"-7/8"	< 6.0	98+65	35	10 595
	HSF-DY-24 136	6 1/2 400V 3N	9 870	202	11 960	331	4.44	21.5	5 700	3 700	3/8"-1 1/8"	< 6.5	101+70	34	13 922
R-449A	HSF-DG-1 014	1/2 230V	1 801	25	2 112	41	0.85	6.6	1 100	1 700	1/4"-1/2"	< 2.0	59+32	34	4 447
	HSF-DG-1 016	5/8 230V	2 015	29	2 378	47	0.93	7.5	1 100	1 700	1/4"-1/2"	< 2.0	67+32	34	4 802
	HSF-DG-1 018	3/4 230V	2 582	38	3 036	62	1.22	9.1	1 800	1 700	1/4"-1/2"	< 2.0	68+45	34	5 716
	HSF-DG-1 024	1 230V	2 945	46	3 478	75	1.40	11.3	1 800	1 700	3/8"-5/8"	< 3.5	82+45	34	6 103
	HSF-DG-1 026	1 1/4 230V *	3 289	54	3 849	86	1.53	16.3	1 800	1 700	3/8"-5/8"	< 3.5	83+45	34	6 397
	HSF-DG-1 034	1 1/2 230V *	3 734	64	4 361	100	2.09	16.6	1 800	1 700	3/8"-5/8"	< 3.5	83+45	35	6 894
	HSF-DG-1 038	1 3/4 400V 3N	4 905	85	5 760	135	2.02	7.8	3 150	3 200	3/8"-5/8"	< 4.0	82+65	29	7 999
	HSF-DG-2 048	2 400V 3N	6 170	115	7 244	175	2.53	7.9	3 150	3 700	3/8"-3/4"	< 5.0	84+65	26	8 505
	HSF-DG-2 054	2 1/2 400V 3N	6 852	130	7 997	200	2.77	9.8	3 150	3 700	3/8"-3/4"	< 5.0	85+65	26	8 808
	HSF-DG-2 060	3 400V 3N	7 844	150	9 122	230	3.28	11.3	3 800	3 700	3/8"-3/4"	< 5.0	88+65	26	9 650
	HSF-DG-2 068	3 1/2 400V 3N	8 576	165	9 934	260	3.77	12.3	3 800	3 700	1/2"-3/4"	< 5.0	88+65	25	10 778
	HSF-DG-3 086	4 400V 3N	10 308	200	12 124	320	4.74	14.5	5 700	4 000	1/2"-7/8"	< 9.0	115+70	38	12 679

Options

- Change to 400V 3N 50Hz power supply. + 5 %
- Proportional control of condensing pressure through fan speed variation (already included in 2/22 series and above). + 304 €
- Coil protection grille. + 112 €
- Built-in active humidification kit. By request
- Dehumidification and heating kit. By request
- Built-in oil separator. + 716 €
- Anti-corrosion evaporator coil coating. + 6 %
- Anti-corrosion condenser coil coating. + 4 %

Dimensions

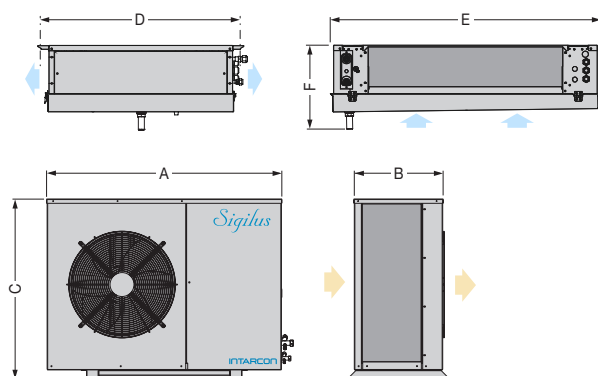

Dimensions (mm)		A	B	C	D	E	F	Evap. fan
R-134a	12 series	1 030	380	577	798	1 086	310	2x Ø 360
	13 series	1 030	380	577	798	1 786	310	3x Ø 360
	14 series	1 030	380	577	888	2 186	310	3x Ø 450
	24 series	1 080	416	827	888	2 186	360	3x Ø 450
R-449A	HSF-DG-1 014 and 1 016	1 030	380	577	798	736	310	1x Ø 360
	HSF-DG-1 018 - 1 034	1 030	380	577	798	1 086	310	2x Ø 360
	HSF-DG-1 038	1 030	380	577	798	1 786	310	3x Ø 360
	HSF-DG-2 048 - 2 068	1 080	416	827	798	1 786	310	3x Ø 360
	HSF-DG-3 086	1 150	487	1 097	888	2 186	360	3x Ø 450

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 5 °C, with a relative humidity cold room of 95 %, and ambient temperature of 35 °C. Estimated cold room volume according to conditions of the calculation bases (page 8).

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

Centrifugal version (HSH-CD series)

High humidity split systems are also available with centrifugal condensing units.

Series / Model	HP	Cooling capacity		Price (€)
		5 °C RH 95 % W	m³	
R-134a	HSH-CDY-12 015	1/2 1 415	21	4 399
	HSH-CDY-12 026	3/4 1 859	28	5 052
	HSH-CDY-12 033	1 2 242	32	5 550
	HSH-CDY-23 033	1 2 746	45	5 912
	HSH-CDY-23 053	1 1/2 3 507	64	6 510
	HSH-CDY-23 074	2 4 526	82	8 094
	HSH-CDY-34 074	2 5 140	93	8 510
	HSH-CDY-44 086	4 6 741	134	9 660
R-449A	HSH-CDY-44 108	5 7 817	158	10 514
	HSH-CDY-44 136	6 1/2 9 791	200	13 036
	HSH-CDG-1 014	1/2 1 399	20	4 242
	HSH-CDG-1 016	5/8 1 608	22	4 395
	HSH-CDG-2 018	3/4 2 510	38	5 353
	HSH-CDG-2 024	1 2 902	46	5 702
	HSH-CDG-2 026	1 1/4 3 242	54	5 930
	HSH-CDG-3 034	1 1/2 4 056	71	6 476
	HSH-CDG-3 038	1 3/4 4 360	77	7 554
	HSH-CDG-3 048	2 6 160	116	8 332
	HSH-CDG-4 054	2 1/4 6 833	132	8 799
	HSH-CDG-4 060	3 7 652	149	9 576
	HSH-CDG-4 068	3 1/2 8 371	164	10 279

Condensing units features as in pages 21 up to 22.

Wine cellar



Wine cellar refrigeration split systems with low-noise axial or centrifugal condensing unit and double-flow evaporating unit with heating function, humidification / dehumidification system and condensed water pump, and compact ceiling construction with axial or centrifugal condensation.


Applications

- ▶ Bottled wine preservation.
- ▶ Cigar and tobacco preservation.
- ▶ Refrigeration at high temperature with humidity control.
- ▶ Preservation of wine in barrels.
- ▶ Cheese curing.
- ▶ Mini drying rooms.

Series

- ▶ **VSF-G:** Wine cellar split systems with low-noise condensing unit.
- ▶ **VSH-CG:** Wine cellar split systems with centrifugal condensing unit.
- ▶ **VCR-N:** Wine cellar roof-top monoblock with axial fan.
- ▶ **VCR-C:** Wine cellar roof-top monoblock with centrifugal fan.

Split systems installation scheme

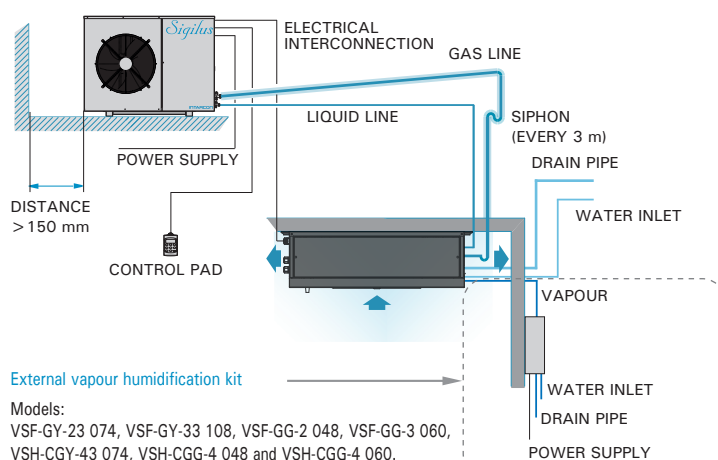

Maximum vertical distance between units of 15 m if the condensing unit is placed at a higher level than the evaporating unit, and 6 m otherwise.

- ❄ Specifically designed for wine preservation in cellars.
- ❄ Active humidity control.
- ❄ Active heating system.
- ❄ Factory-tested systems with no need for on-site tests.
- ❄ Refrigerant pre-load.
- ❄ Units exempt from leak checks.

Conservation of bottled wine

Bottled wine requires temperature and humidity controlled conditions that optimally conserve the product while avoiding both cork drying and label mouldiness.

The wine treatment unit guarantees optimal conditions for the preservation of bottled wine.



Wine conservation in barrel

In the conservation of wine in barrels, the relative humidity inside the cellar is of great importance, which must be adjusted so that there is no transfer of water vapour between the environment of the cellar and the interior of the barrel, avoiding thus wine wastage or water absorption by the content.



External vapour humidification kit

Vapour humidification with 3 kg/h capacity, consisting of: vapour lances integrated in the evaporator unit, a submerged electrode generating cylinder with feed valves and water purge valves.



Electrical interconnection

For the interconnection of the condenser and evaporator units, the following cable sections must be provided for a length of 10 m (except series 43 and 44).

Power supply	230V 50Hz	400V 3N 50Hz
Probes	4 x 1 mm ²	
Manoeuvre	10 x 1 mm ²	
Heating resistance	2 x 2.5 mm ² + G	4 x 1.5 mm ² + G
Control pad	2 x 1 mm ²	
Humidifier	2 x 1 mm ²	

To know electrical interconnections of each model: see technical manual.

Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ Minimal R-134a or R-449A refrigerant load.
- ▶ Hermetic reciprocating compressor.
- ▶ Double-flow low-profile evaporating unit with heaters and active humidification / dehumidification system; and evaporation anti-corrosion coated coil.
- ▶ Air defrost; Air filter.
- ▶ Built-in solenoid and thermostatic expansion valves.
- ▶ Drain pan and condensed water pump.
- ▶ Flare-type cooling connections (up to 1/2"-3/4) and service valves.
- ▶ Liquid receiver and refrigerant pre-load for 10 m piping.
- ▶ Proportional condensation control (VSF 1/2/3 and VSH 4/43 series) and all / nothing condensation control (VSF 0, VSH 2/22 and 3/33 series).
- ▶ Multifunction electronic dual control of temperature and humidity with remote keyboard and digital regulation of condensing temperature.
- ▶ MCB protection.



VSF-G series



VSH-CG series


230V 50Hz / 400V 3N 50Hz | Positive temperature - Wine cellar | R-134a / R-449A

Series / Model	Compressor		Cellar volume (m ³)		Cooling capacity at 15 °C 70 % RH (W) ⁽¹⁾	Heating capacity (W)	Input power (kW) ⁽²⁾	Input power (kW) ⁽³⁾	Max. current (A)	Evap. air flow (m ³ /h)	Conden. air flow (m ³ /h)	Liq-Gas cooling connection	Refrigerant charge (kg) ⁽⁴⁾	Weight (kg)	SPL dB(A) ⁽⁵⁾	Price (€)
	HP	Power supply	Without insulation	Insulation												
R-134a	VSF-GY-00 010	3/8 230V	11	37	1 242	1 000	1.52	0.52	8.8	500	350	1/4"-3/8"	< 1.5	46+30	28	6 362
	VSF-GY-10 015	1/2 230V	20	53	1 820	1 000	1.67	0.67	10.1	500	1 700	1/4"-1/2"	< 2.0	57+30	34	7 251
	VSF-GY-11 033	1 230V	47	100	3 281	1 500	2.76	1.26	16.3	1 100	1 700	1/4"-5/8"	< 2.5	67+35	34	8 728
	VSF-GY-12 053	1 1/2 230V *	74	168	4 683	3 000	4.93	1.93	26.1	1 800	3 200	3/8"-3/4"	< 3.5	77+47	35	10 808
	VSF-GY-23 074 ⁽⁶⁾	2 230V *	149	297	7 497	6 000	8.60	2.60	43.7	3 150	3 700	3/8"-3/4"	< 5.5	79+75	34	14 254
R-449A	VSF-GY-33 108 ⁽⁶⁾	5 400V 3N	224	444	9 944	6 000	9.50	3.50	26.1	3 150	4 000	3/8"-7/8"	< 6.0	98+75	35	16 691
	VSF-GG-0 008	1/3 230V	10	35	1 227	1 000	1.16	0.48	8.4	500	350	1/4"-3/8"	< 1.5	48+30	28	5 997
	VSF-GG-1 014	1/2 230V	24	60	2 134	1 500	2.55	1.05	13.5	1 100	1 700	1/4"-1/2"	< 2.5	59+35	34	6 833
	VSF-GG-1 024	1 230V	47	100	3 388	3 000	4.81	1.81	24.9	1 800	1 700	3/8"-5/8"	< 4.0	82+47	34	8 226
	VSF-GG-1 034	1 1/2 230V *	75	170	4 944	3 000	5.55	2.55	29.9	1 800	3 200	3/8"-5/8"	< 4.0	83+47	35	9 621
R-449A	VSF-GG-2 048 ⁽⁶⁾	2 400V 3N	151	300	7 830	6 000	9.19	3.19	17.9	3 150	3 700	1/2"-3/4"	< 5.5	84+75	26	12 999
	VSF-GG-3 060 ⁽⁶⁾	3 400V 3N	221	450	10 490	6 000	10.87	4.87	19.5	5 200	6 500	1/2"-7/8"	< 6.5	88+140	26	14 855

Options

- ▶ Change to 400V 3N 50Hz power supply. + 5 %
- ▶ Proportional control of condensing pressure through fan speed variation (already included in VSF 1/2/3 series and VSH 4/43 series). + 304 €
- ▶ Built-in oil separator. + 716 €
- ▶ Condenser coil polyurethane anti-corrosion treatment. + 4 %
- ▶ Coil protection grille. + 112 €

Dimensions

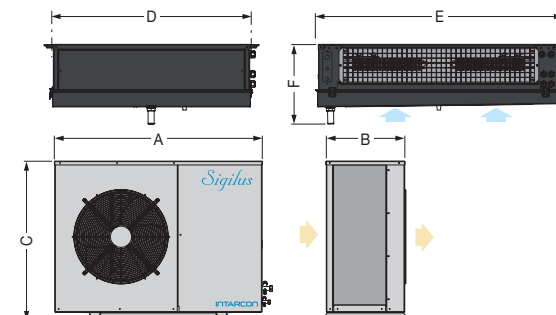

Dimensions (mm)	A	B	C	D	E	F	Evap. fan
0 and 00 series	671	308	442	764	653	205	1x Ø 254
VSF-GY-10 015	1 030	380	577	764	653	205	1x Ø 254
11 and VSF-GG-1 014 series	1 030	380	577	886	728	310	1x Ø 360
12, VSF-GG-1 024 and 1 034 series	1 030	380	577	886	1 079	310	2x Ø 360
2 and 23 series	1 080	416	827	886	1 803	310	3x Ø 360
VSF-GY-33 108	1 150	487	1 097	886	1 803	310	3x Ø 360
VSF-GG-3 060	1 150	487	1 097	976	2 203	360	3x Ø 450

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 15 °C (PT) with relative humidity cold room of 70 % and ambient temperature of 35 °C. Volume of cold room for the hotel industry estimated without insulation and warehouse volume estimated with 30 mm insulation. Others applications by request

⁽²⁾ Input power at dehumidification mode.

⁽³⁾ Input power at refrigeration mode.

⁽⁴⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽⁵⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

* Available units with 400V 3N 50Hz power supply.

⁽⁶⁾ Standard models with external vapour humidification kit.

Centrifugal version (VSH-CG series)

Wine cellar split systems are also available with centrifugal condensing unit.

Series / Model		HP	Conden. air flow (m³/h)	ASP (mmca) (8)	Price (€)
R-134a	VSH-CGY-10 010	3/8	575	8	5 800
	VSH-CGY-21 015	1/2	1 000	12	7 251
	VSH-CGY-22 033	1	1 000	12	8 728
	VSH-CGY-33 053	1 1/2	1 500	14	10 808
	VSH-CGY-43 074 ^(K)	2	3 500	10	14 254
R-449A	VSH-CGG-2 014	1/2	1 000	12	6 833
	VSH-CGG-2 024	1	1 000	12	8 226
	VSH-CGG-3 034	1 1/2	1 500	14	9 621
	VSH-CGG-4 048 ^(K)	2	3 500	10	12 999
	VSH-CGG-4 060 ^(K)	3	3 500	10	14 855

⁽⁶⁾ Available static pressure of condensation. Condensing units features as in pages 21 up to 22.

Features

- ▶ R-134a refrigerant load, below 1.5 kg.
- ▶ Hermetic reciprocating compressor.
- ▶ High and low pressure switches.
- ▶ Air defrost.
- ▶ Heating elements, humidification / dehumidification system.
- ▶ Evaporation coils with anti-corrosion coating.
- ▶ Water purge system.
- ▶ Thermostatic expansion valve.
- ▶ Evaporation drawer of 50 mm sandwich panel made of polyurethane foam, internally coated with pre-lacquered steel plate.
- ▶ Multifunction electronic dual control of temperature and humidity with remote keyboard and digital regulation of condensing temperature.



VCR-N series



VCR-C series


230V 50Hz | Positive temperature | R-134a

Series / Model	Compressor		Cellar volume (m ³)		Power supply at 15 °C 70 % RH (W) ⁽¹⁾	Heating capacity (W)	Input power (kW)	Max. current (A)	Evap. air flow (m ³ /h)	Condens. air flow (m ³ /h)	Refrig. load (kg) ⁽²⁾	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
	HP	Power supply	Without insulation	Insulated										
R-134a	VCR-NY-1 010	3/8 230V	15	34	1 269	1 000	1.55	8.9	600	575	< 1.0	73	29	5 554
	VCR-NY-2 015	1/2 230V	25	63	2 020	1 000	1.83	10.8	1 150	1 000	< 1.5	88	34	5 981
	VCR-NY-2 033	1 230V	42	95	3 203	2 000	3.37	19.0	1 150	1 000	< 1.5	98	34	7 190


Options

- ▶ Non-return discharge damper (VCR-C series). + 67 €
- ▶ Adaptation of air discharge to circular duct. + 123 €
- ▶ Vertical air flow (centrifugal version).

Monoblock installation scheme

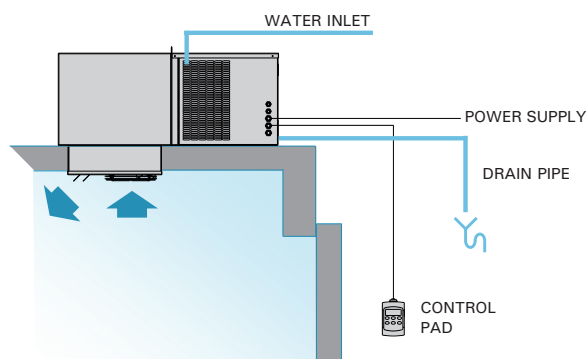

Dimensions

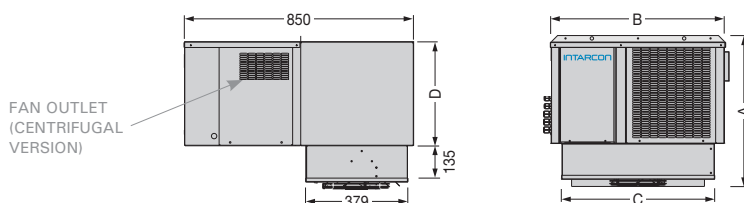

Measuring mm.

Dimensions (mm)	A	B	C	D	Fan outlet	Hopper
1 series	574	665	582	385	185 x 115	Ø 150
2 series	677	835	756	469	230 x 130	Ø 200

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 15 °C (PT) with relative humidity cold room of 70 % and ambient temperature of 35 °C.

Volume of cold room for the hotel industry estimated without insulation and warehouse volume estimated with 30 mm insulation.

⁽²⁾ Units with refrigerant load less than 5 tons of CO₂ equivalent (3.5 kg of R-134a or R-449A) exempt from leak checking, Regulation (EU) No 517/2014.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

Centrifugal version (VCR-C series)

Wine cellar split systems are also available with centrifugal condensation unit.

Series / Model	HP	Condens. air flow (m ³ /h)	ASP (mmca) ⁽⁴⁾	Price (€)
R-134a	VCR-CY-1 010	3/8 575	8	5 835
	VCR-CY-2 015	1/2 1 000	8	6 407
	VCR-CY-2 033	1 1 000	12	7 828


⁽⁴⁾ Available static pressure of condensation.

Exhaust duct

Recommended size for 20 m long steel, PVC or fibreglass ducts (each elbow at 90° equals 5 m in length). For flexible or semi-flexible ducts use a larger size.

- 1 series: 200 x 200 mm or Ø 150 mm
- 2 series: 250 x 150 mm or Ø 200 mm

Mounting frame



Dimensions (mm)	G	H
1 series	588	385
2 series	762	385



Waterloop system

Indirect condensation system



Complies with
Ecodesign



VRC multi-service
version




Low noise
construction

Waterloop system

Waterloop is a commercial refrigeration system, consisting of: DX cooling units distributed, with indirect condensation by a water circuit; and one or more units in parallel air-cooler connected to the condensation heat dissipation.


Supermarkets and food stores applications

Waterloop system allows distributed cooling production at different temperatures, with a single condensing water loop. Condensation heat recovery from the cooling units can easily be carried out in air conditioners or fan coils.

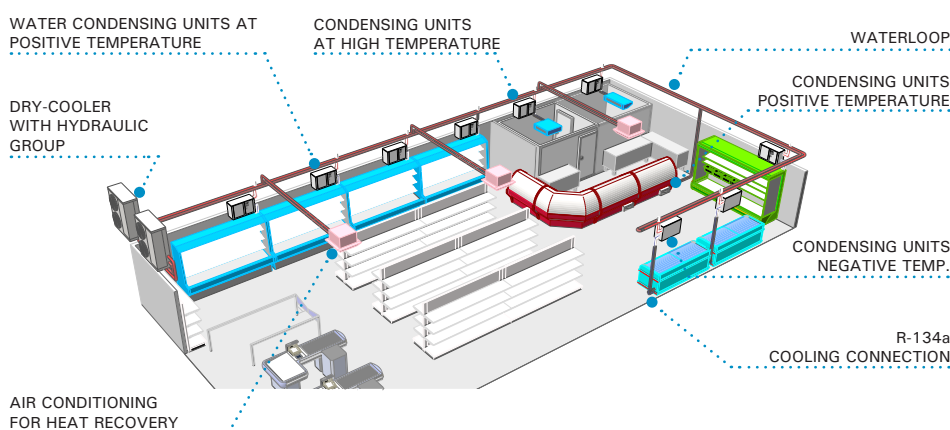

Application in industrial kitchens

Waterloop system makes possible to centralise a set of cold rooms and process rooms. The use of compact R-290 **waterloop** units in cold rooms and process rooms is a 100 % ecological solution free of greenhouse gases.

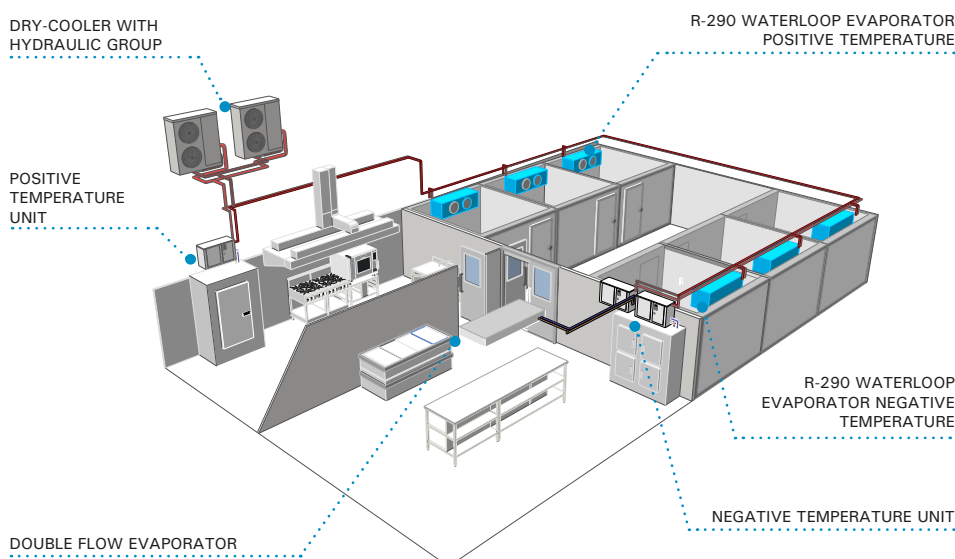

Ecology

Distributed cooling production allows to reduce and fractionate the load of HFC refrigerant in the installation, so that the risk of leakage is reduced.



Safety

Decentralization of the cooling production contributes a greater operation security of the installation, that guarantees a high availability of the system when faced with the isolated failure of a single unit.

The installation of a double air-cooler or dry-cooler in parallel, provides a greater operational security.

The condensation water loop contains only closed-circuit water working at low hydraulic pressure.



Simple installation

Waterloop system is very easy to install, thanks to its condensed water units pre-charged with refrigerant, and air-coolers or dry-coolers with inbuilt hydraulic unit/circuit.



Precision

Distributed cooling production allows adaptation of working temperatures to the needs of each service, thus obtaining an adequate degree of humidity for the best preservation of each product, and optimizing the performance of the systems.



Energy saving

Condensing units incorporate high-efficiency scroll compressors with R-134a or R-449A refrigerant for positive temperature, and R-449A for negative temperature.

Air-coolers or dry-coolers incorporate hydraulic group with electronic pump of variable flow, that adapts its functioning speed to the demand of the installation. Motor fans are equipped with speed regulators to reduce their consumption in low ambient temperatures or low load.



Versatility

Waterloop system is applicable both in new installations and in existing centralized direct expansion facilities, where the update of refrigeration installation is desired. In fact, existing refrigerating displays are usable and easily converted to new refrigerants.



Easy and flexible installation

Refrigeration units are supplied with service valves and factory refrigerant pre-load with service keys.

The waterloop can be made with polypropylene pipe without insulation, with service valves in each refrigeration unit, thus providing great flexibility in modifying the installation.




Tropicalised design


Unlike other systems on the market, the waterloop system is designed to work properly even with extreme ambient temperatures of up to 45 °C, with condensation water temperatures of up to 55 °C, and without the need to incorporate additional cooling equipment.

Waterloop system allows different configurations from a simple cold room up to a set of rooms and other refrigeration services at different temperatures.


Simple installation example 1 + 1

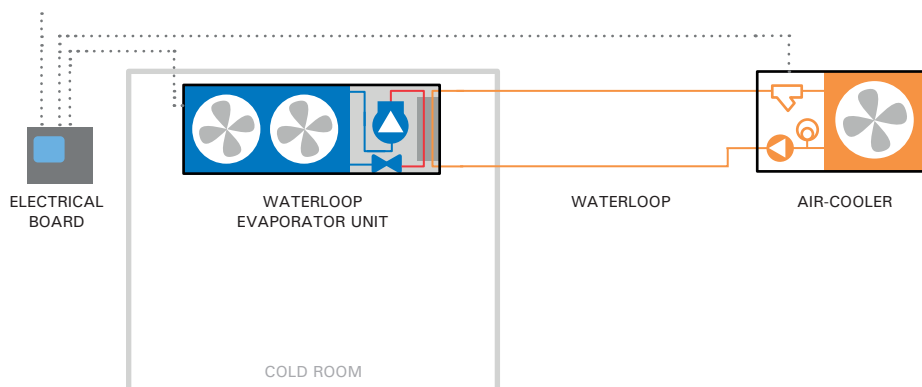

Twin installation example

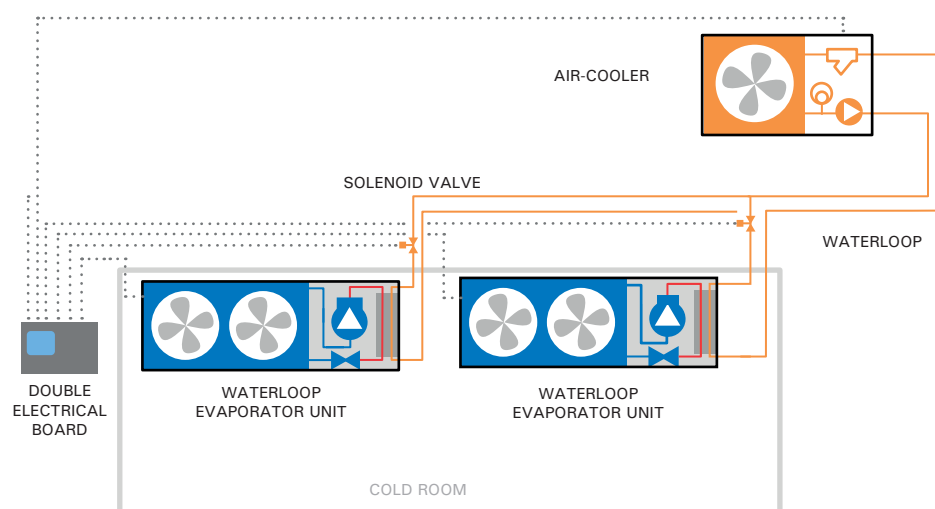

Multi installation example

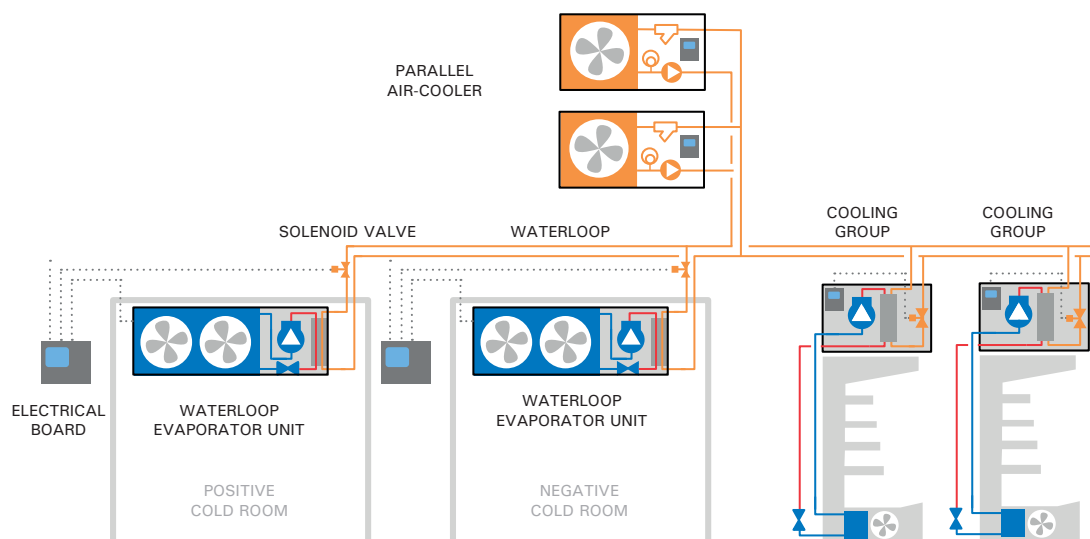

Product range

Evaporator units with built-in compressor, condensed by water, and with external panel. Designed for positive or negative cold rooms temperature.



Refrigeration units condensed by water, with external panel. Designed to service refrigerated cabinets and displays.



Aero condensers with built-in hydraulic unit, at constant or variable flow, with water loop temperature control.



Waterloop

Evaporator with built-in compressor




- ❄ Compact unit condensed by water.
- ❄ Minimal **R-290** refrigerant charge.
- ❄ Easy and safe installation with connection to the condensation water circuit.

Waterloop evaporator units with compressor are compact units for installation inside small cold rooms, designed with natural refrigerant R-290 and Waterloo condensed.


Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. 60Hz model by request.
- ▶ R-290 refrigerant charge.
- ▶ Bodywork in aluminium sheet and structure in galvanised steel lacquered in polyester paint.
- ▶ Alternative hermetic or scroll compressor integrated in thermally insulated compartment, with crankcase heater.
- ▶ Refrigeration circuit in annealed copper tube, with high and low pressure switches, filter drier and load valve.
- ▶ Evaporation coil in copper pipes and aluminium fins, thermostatic expansion valve and hot gas defrost.
- ▶ Axial motor fans.
- ▶ Stainless steel brazed plates heat exchanger.
- ▶ Threaded hydraulic connections.
- ▶ Control panel in white lacquered sheet metal cabinet, with MCB protection and multifunction electronic control.
- ▶ Water solenoid valve for multi-equipment Waterloo installation (without assembly).

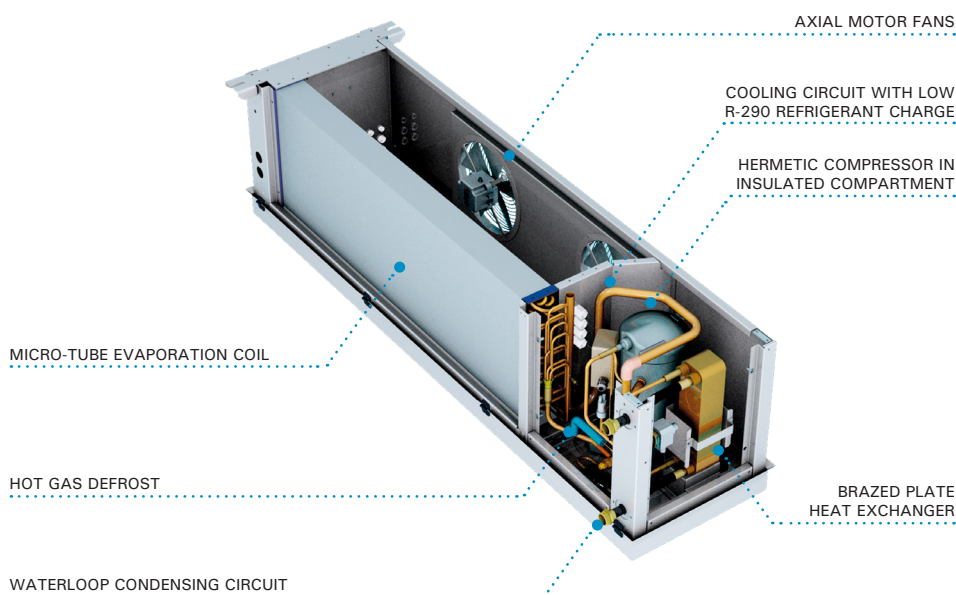

Installation

Installation of a closed loop water evaporator unit with an air cooler and general electrical panel:



Compact R-290 system

The **waterloop** evaporator units are hermetically sealed compact systems with a minimum charge of R-290. They have a minimum R-290 refrigerant charge lower than the practical limit of the refrigerated volume.

Electrical board (optional)

Electrical power and control board for outside installation.

- MCB protection of compressor and manoeuvre.
- Electronic control with temperature control and recording of maximum and minimum temperatures.
- Jet Cool function.
- Energy saving function.
- Optional air condenser management with water loop temperature control and frost protection.

230V 50Hz / 400V 3N 50Hz | Positive temperature | Hermetic compressor - Scroll compressor | R-290

Series / Model		Compressor		Cooling capacity / cold room volume (W) ⁽¹⁾	Input power (W)	Max. current (A)	Evap. air flow (m³/h)	Condens. water flow (l/h)	PdC (kPa) ⁽²⁾	Hydraulic connection	Refrigerant charge (g)	Weight (kg)	Price (€)	Dry-cooler model ⁽³⁾	Set price (€)
		HP	Power supply	0 °C W											
R-290	1xH	MCC-ND-1 017	3/4 230V	1 430	572	7.7	1 600	350	3	3/4"	210	50	4 228	CWF-0	6 794
		MCC-ND-1 034	1 1/2 230V	2 640	1 060	16.4	1 600	650	3	3/4"	170	59	4 729	CWF-0	7 295
	1xSc	MCC-SD-1 012	1 1/2 400V 3N	3 410	860	7.7	1 600	750	5	3/4"	265	62	6 170	CWF-1	9 981
		MCC-SD-2 017	2 400V 3N	3 930	1 070	9.0	1 700	875	5	1"	240	240	7 295	CWF-2	12 209

230V 50Hz / 400V 3N 50Hz | Negative temperature | Hermetic compressor - Scroll compressor | R-290

Series / Model		Compressor		Cooling capacity / cold room volume (W) ⁽¹⁾	Input power (W)	Max. current (A)	Evap. air flow (m³/h)	Condens. water flow (l/h)	PdC (kPa) ⁽²⁾	Hydraulic connection	Refrigerant charge (g)	Weight (kg)	Price (€)	Dry-cooler model ⁽³⁾	Set price (€)	
		HP	Power supply	-20 °C W												
R-290	1xH	BCC-ND-1 034	1	230V	847	800	11.0	1 600	300	3	3/4"	150	59	4 696	CWF-0	7 262
	1xSc	BCC-SD-1 012	1 1/2	400V 3N	1 480	770	7.6	1 600	400	3	3/4"	160	68	6 116	CWF-0	8 682
		BCC-SD-2 017	2	400V 3N	1 980	1 000	8.9	1 700	525	3	1"	180	72	7 109	CWF-1	10 920

Options


- ▶ Electrical board for twin installation
- ▶ Without water solenoid valve for multi-equipment waterloop installation.

By request


By request

Dimensions

1 series

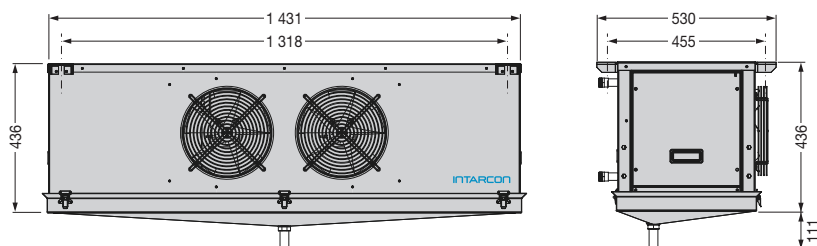

2 series

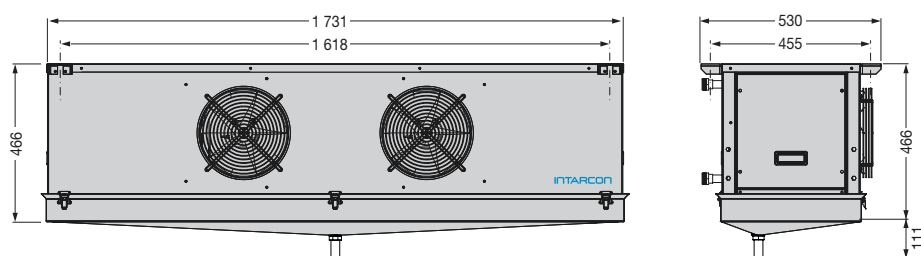

Measuring mm.

⁽¹⁾ Nominal performances refer to operation with cold room temperatures of 0 °C (PT) and -20 °C (NT) and water inlet condensation temperature of 7 °C. Estimated cold room volume according to conditions of the calculation bases (page 12).

⁽²⁾ Condenser pressure drop in the water circuit.


⁽³⁾ Recommended air cooler model to combine with the evaporator unit.

Electrical interconnections

For the electrical interconnection from the electrical panel to the unit and to the air condenser (optional), the following interconnection cables must be provided:


Cabinet - Evaporator	Connection
Compressor for single-phase units (except MCC-ND-1 034)*	3 x 1.5 mm² + T
Compressor for three-phase units and MCC-ND-1 034	3 x 2.5 mm² + T
Manoeuvre	7 x 1 mm²
Probes	5 x 1 mm²
Cabinet - Dry-cooler	Connection
Pump (1 + 1 system)	2 x 1.5 mm² + T
Fan (1 + 1 system)	3 x 1 mm²
Probes (1 + 1 system)	3 x 1 mm²
Pumping permit (multi system)	2 x 1 mm²

Electrical board dimensions



Measuring mm.

Electrical board dimensions - Twin installation

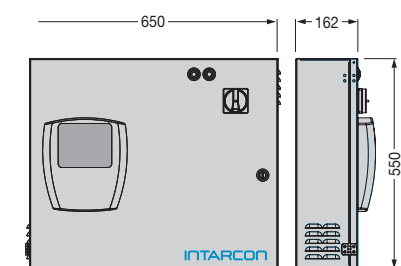

Measuring mm.

Waterloop

Water-cooled condensing units




Water-cooled condensing units for positive and negative temperature refrigeration, with very compact size and quiet operation, designed for on-wall or floor installation.

Features

- ▶ 230V 50Hz or 400V 3N 50Hz power supply. 60Hz model by request.
- ▶ Casing in pre-painted galvanized steel sheet, with noise insulation, with removable front panel for access to the compressor and the electrical panel.
- ▶ Acoustically insulated scroll compressor, mounted on shock absorbers.
- ▶ Horizontal construction rotary compressor (MDM-P / BDM-P).
- ▶ Stainless steel brazed plates heat exchanger. Cooling circuit with ceramic dryer filter, sight glass, high and low pressure switches and services valves.
- ▶ Hydraulic condensation circuit made of copper pipe with threaded connections.
- ▶ Electromechanic control panel with thermomagnetic protection.
- ▶ Liquid injection system for negative temperature models with R-449A.


Refrigeration and electrical sheme

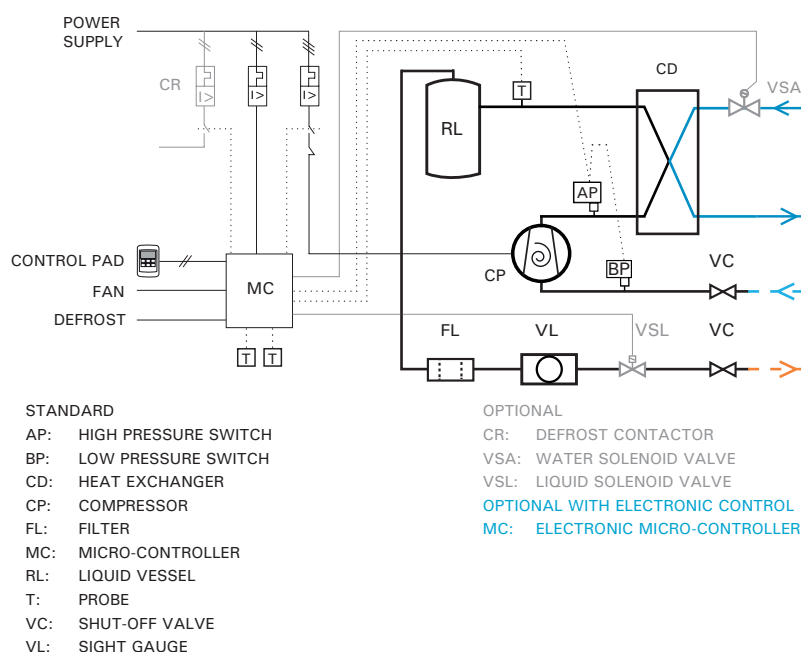

- ❄ Indirect condensation by a water circuit.
- ❄ Low noise level.
- ❄ Simple installation.
- ❄ Reduced refrigerant load.
- ❄ According to F-Gas.

Installation

Waterloop series motor condensers can be installed on the furniture, on the floor or anchored at the wall.

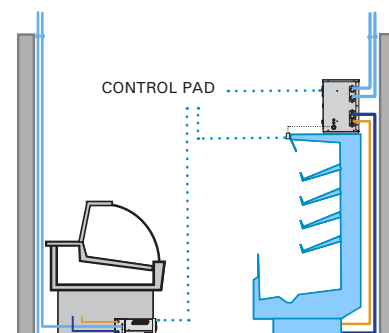

Rotary compressors

Hermetic rotary compressors provide greater reliability, lower noise and maximum design flexibility.



Very quiet compressors

Scroll compressors Copeland, are characterized by their great robustness and reliability of operation, and being cooled exclusively by the refrigerant gas, allow effective soundproofing.



Calculation of hydraulic connections

Visit our easy and intuitive online software to calculate the hydraulic pipes of the system.



<https://www.intarcon.com/en/refrigeration-calculation/>

230V 50Hz / 400V 3N 50Hz | Positive temperature | Rotary compressor - Scroll compressor | R-134a / R-449A

Series / Model		Compressor			Cooling capacity (W) ⁽¹⁾			Input power (kW)	Max. current (A)	Condensing flow (l/h)	Hydraulic connection	Pressure drop (mca) ⁽²⁾	Liq-Gas cooling connection	Weight (kg)	SPL dB(A) ⁽³⁾ 1 m	Price without electronic control (€)
		HP	Model	Power supply	Evaporation temperature											
					0 °C	-5 °C	-10 °C									
R-134a	1x R	MDM-PY-0 005	3/8 HGA-4450Y	230 V-I	900	730	585	0.3	4	150	3/4"	5	1/4"-3/8"	20	36	1 664
		MDM-PY-0 007	1/2 HGA-4476Y	230 V-I	1 255	1 030	830	0.5	5	250	3/4"	5	1/4"-1/2"	25	45	2 021
	1x Scroll	MDM-SY-1 009	1 1/4 ZS09	400 V-III *	1 855	1 540	1 270	0.7	3	350	3/4"	5	1/4"-5/8"	34	40	3 166
		MDM-SY-1 015	2 ZB15	400 V-III *	2 840	2 360	1 945	1.1	5	500	3/4"	5	1/4"-5/8"	43	37	3 990
		MDM-SY-1 021	3 ZB21	400 V-III *	4 250	3 520	2 890	1.5	7	750	3/4"	5	1/4"-3/4"	53	40	4 443
		MDM-SY-1 029	4 ZB29	400 V-III	5 245	4 355	3 585	2.0	10	950	1"	5	3/8"-7/8"	53	40	5 006
		MDM-SY-1 038	5 ZB38	400 V-III	7 095	5 880	4 835	2.5	13	1 250	1"	5	3/8"-7/8"	68	43	5 483
		MDM-SY-1 045	6 ZB45	400 V-III	8 320	6 915	5 695	2.9	13	1 500	1"	5	3/8"-1 1/8"	70	43	5 781
		MDM-SY-1 057	8 ZB57	400 V-III	10 575	8 780	7 230	4.0	16	1 950	1 1/4"	5	3/8"-1 1/8"	75	50	6 678
R-449A	1x R	MDM-PG-0 006	1/2 HGA-4467Z	230 V-I	1 285	1 055	855	0.5	5	200	3/4"	5	1/4"-3/8"	22	38	1 676
		MDM-PG-0 010	1 HGA-4512Z	230 V-I	2 140	1 765	1 440	0.5	7	350	3/4"	5	1/4"-1/2"	27	41	2 093
	1x Scroll	MDM-SG-1 009	1 1/4 ZS09	400 V-III *	3 095	2 585	2 135	1.1	2	500	1"	5	1/4"-5/8"	34	40	3 412
		MDM-SG-1 015	2 ZB15	400 V-III *	4 860	4 050	3 340	1.8	5	800	1"	5	3/8"-5/8"	43	37	3 800
		MDM-SG-1 021	3 ZB21	400 V-III *	7 365	6 140	5 080	2.5	7	1 200	1"	5	3/8"-3/4"	53	40	4 233
		MDM-SG-1 029	4 ZB29	400 V-III	9 610	8 020	6 635	3.2	10	1 500	1 1/4"	5	3/8"-7/8"	53	40	4 766
		MDM-SG-1 038	5 ZB38	400 V-III	12 445	10 380	8 540	4.1	13	1 950	1 1/4"	5	3/8"-7/8"	68	43	5 221
		MDM-SG-1 045	6 ZB45	400 V-III	14 715	12 270	10 130	4.7	13	2 500	1 1/4"	5	3/8"-1 1/8"	70	43	5 710

230V 50Hz / 400V 3N 50Hz | Negative temperature | Rotary compressor - Scroll compressor | R-449A

Series / Model		Compressor		Cooling capacity (W) ⁽¹⁾				Input power (kW) *	Max. current (A)	Condensing flow (l/h)	Hydraulic connection	Pressure drop (mca) ⁽²⁾	Liq-Gas cooling connection	Weight (kg)	SPL dB(A) ⁽³⁾ 1 m	Price without electronic control (€)		
		HP	Model	Power supply	Evaporation temperature													
					-20 °C	-25 °C	-30 °C										-35 °C	
R-449A	1x R	BDM-PG-0 004	1	HGA-2446Z	230 V-I	985	785	615	470	0.6	5	150	1/2"	5	1/4"-1/2"	23	45	2 491
	1x Scroll	BDM-SG-1 006	2	ZF06	400 V-III	2 360	1 910	1 525	1 195	1.5	5	550	3/4"	5	1/4"-5/8"	45	39	4 961
		BDM-SG-1 009	3	ZF09	400 V-III	3 210	2 590	2 070	1 620	1.9	6	700	3/4"	5	3/8"-3/4"	54	44	5 679
		BDM-SG-1 011	3 1/2	ZF11	400 V-III	4 050	3 275	2 610	2 045	2.3	8	850	3/4"	5	3/8"-3/4"	55	45	5 914
		BDM-SG-2 013	4	ZF13	400 V-III	4 595	3 715	2 970	2 325	2.5	9	950	1"	5	3/8"-7/8"	55	47	6 122
		BDM-SG-2 015	5	ZF15	400 V-III	5 640	4 560	3 640	2 850	3.3	10	1 200	1"	5	3/8"-7/8"	73	47	6 710
		BDM-SG-2 018	6	ZF18	400 V-III	6 685	5 400	4 310	3 375	3.9	14	1 500	1"	5	3/8"-1 1/8"	78	49	7 406
		BDM-SG-2 025	8	ZF25	400 V-III	8 400	6 795	5 430	4 265	4.2	16	1 750	1 1/4"	5	3/8"-1 1/8"	78	5	8 838

Options

- Change to 230V 50Hz power supply. + 8 %
- Electronic control for evaporator and compressor with temperature probes and control suitable for local or remote control. + 5 %
- Refrigerant pre-load for 5 m piping. + 8 %
- Built-in liquid solenoid valve with body and coil. + 178 €
- Water solenoid valve. + 178 €
- Dynamic balancing valve. By request
- Glycol water condensation. By request

⁽¹⁾ Cooling capacity at nominal performances refer to operation at evaporation temperature -10 °C (PT) and -30 °C (NT), water temperature of 40 °C, 10 K super-heating and 3 K sub-cooling.


⁽²⁾ Condenser pressure drop in water circuit.

⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 1 m from the unit (non-binding value calculated from sound power).


* Available units with 230V 50Hz power supply.

Dimensions

0 series



1 and 2 series

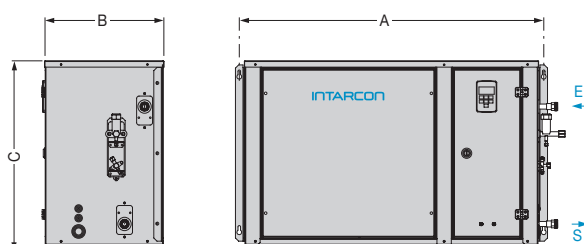


Measuring mm.

Dimensions (mm)	A	B	C
1 series	832	355	531
2 series	957	375	600

Waterloop

Dry-cooler with built-in hydraulic group

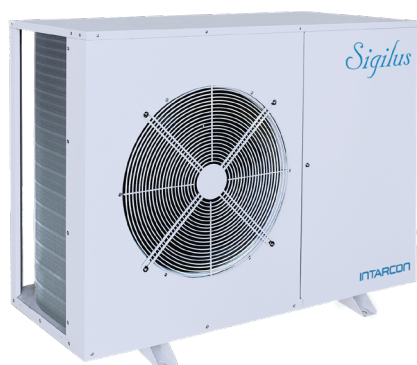

- ❄ Low sound level with double acoustic insulation.
- ❄ Tropicalised design for ambient temperature up to 45 °C as standard.

Dry-coolers with built-in hydraulic group, in a low-noise construction, designed for heat dissipation of the refrigeration equipment condensation waterloop.

Features

- ▶ Axial EC motor fans (except CWF-0 and CWF-1).
- ▶ High efficiency water coils with copper pipes and aluminium fins.
- ▶ Hydraulic group with variable flow electronic pump, expansion tank, security valve, filter, thermomanometers and auto-fill valve included.
- ▶ Closed membrane expansion tank.
- ▶ Threaded hydraulic connections.
- ▶ Electric power panel with protection of hydraulic pump, fan motor and frequency variator (except CWF-0 and CWF-1).

Electronic control

Waterloop dry-coolers incorporate an electronic control with the next functions:

- Variation of the water pump flow adapting to the demand, depending on the impulsion pressure.
- Waterloop temperature control by fan speed variation, with floating set-point.
- Frost protection.

230V 50Hz | Positive temperature | Water

Series / Model	Flow control	Exchange capacity (W) ⁽¹⁾	Air flow (m³/h)	Fan (N x Ø mm)	Water flow (l/h)	Input power (kW)	Max. current (A)	Pressure drop (kPa) ⁽²⁾	Hydraulic connection	Weight (kg)	SPL dB(A) ⁽³⁾	Price (€)
CWF-0	Constant	3 000	1 700	1x Ø 360	500	0.14	1.1	100	3/4"	76	30	2 566
CWF-1	Constant	4 700	3 200	1x Ø 450	750	0.22	1.8	100	3/4"	79	26	3 811
CWF-2	Variable	6 000	3 700	1x Ø 450	1 000	0.24	2.0	100	1"	81	26	4 914
CWF-3	Variable	10 000	6 500	2x Ø 450	1 500	0.44	3.6	100	1"	101	29	6 104
CWF-4	Variable	12 000	7 000	2x Ø 450	2 000	0.48	3.9	100	1 1/4"	113	29	6 541
CWF-6	Variable	20 000	13 000	4x Ø 450	3 000	0.88	7.0	100	1 1/2"	160	32	10 263
CWF-8	Variable	24 000	14 000	4x Ø 450	4 000	0.96	7.5	100	1 1/2"	185	32	11 355

Options

- ▶ Water coil anti-corrosion polyurethane coating. + 8 %
- ▶ Coil protection grille:
Series 0 up to 4. + 112 €
Series 6 and 8. + 196 €

⁽¹⁾ Estimated heat exchange power with air temperature of 35 °C, and water inlet / outlet temperature of 45 / 40 °C.

⁽²⁾ Available circuit pressure.




⁽³⁾ Condenser sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

Dimensions

0,1 and 2 series

3 and 4 series

6 and 8 series



Dimensions (mm)	A	B	C
0 and 1 series	1 030	380	577
2 series	1 080	410	827
3 series	1 150	481	1 097
4 series	1 150	481	1 347
6 series	1 748	481	1 097
8 series	1 748	481	1 347



Condensing units




Complies with
Ecodesign



VRC
multi-service version



Low noise
construction

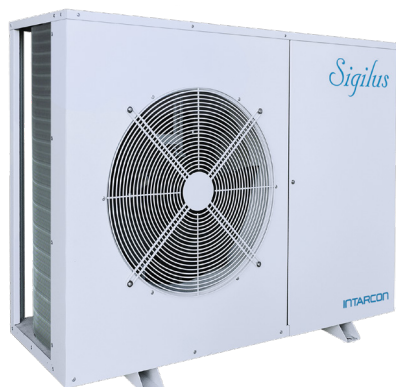

Low noise condensing units for positive and negative refrigeration with hermetic alternative compressor with noise insulation and low speed axial motor fan.

Features


- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ R-134a or R-449A refrigerant, other refrigerants by request.
- ▶ Reciprocating hermetic compressor, acoustically insulated with discharge muffler, mounted on shock absorbers, with crankcase heater and internal klixon.
- ▶ Large-surface condensing coil made of copper tubes and aluminium fins, with tropicalised dimensioning for ambient temperatures up to 50 °C.
- ▶ Low speed axial motor fan.
- ▶ Refrigeration circuit equipped with high and low pressure switches, ceramic filter and sight gauge.
- ▶ Digital control of condensation pressure with the optional electrical board, and all-nothing condensation control in condensers without electrical panel.
- ▶ Proportional control of condensing pressure through fan speed variation (included from MDF-NY-2086 and MDF-NG-1038 without electronic control).
- ▶ Full control and power board with compressor and motor fan protection.
- ▶ Liquid injection system for negative temperature models with R-449A.

Versions

- ▶ **-N version.** Without electrical board. Designed for on/off operation depending on the suction pressure (pump-down). With electrical board as an option. Electronic controller to manage the condensing unit and the evaporator built-in solenoid valve as an option.
- ▶ **-V version (multi-service).** The multi-service version features VRC system to adjust the refrigerant flow to the demand of the evaporators, keeping the pressure constant in suction the line. The VRC system is composed of a set of pressure and temperature control valves to progressively modulate cooling capacity from 100 % to 10 % of its nominal capacity, while reducing energy consumption and preventing compressor overheating.

- ❄ Tropicalised design for high ambient temperature up to 50 °C.
- ❄ Multi-service version with VRC cooling capacity modulation system.
- ❄ Liquid injection system for compressor refrigeration.

Installation without electrical board (-N version)

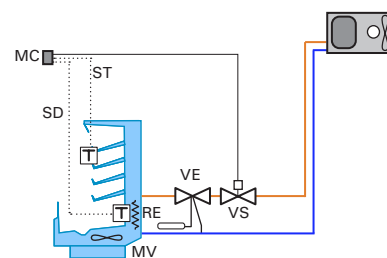

MC: CONTROL PAD
MV: MOTOR FAN
RE: DEFROST HEATER
ST: THERMOSTAT PROBE
SD: DEFROST PROBE
VE: EXPANSION VALVE
VS: SOLENOID VALVE

Oil separator (optional)

Sigilus condensing units connected to a single evaporator usually not require an oil separator. This is recommended for long pipe lengths (> 30 m) being necessary for a suitable circuit design to ensure oil return.

Proportional condensation control

Sigilus condensing units incorporate proportional condensation control by speed variation for prolonged running times at low ambient temperature.

Triple noise insulation

Sigilus units incorporate triple noise insulation as standard:

- Insulated compressor compartment separated from air flow.
- Acoustic compressor jacket (three-phase models) and discharge muffler (hermetic models).
- Low-noise and low-speed fans, mounted on shock absorbers.

Ecodesign requirements

Coefficient of Performance (COP) and Seasonal Performance Factor (SEPR) according to Commission Regulation (EU) 2015/1095.

	Cooling capacity	Ecodesign standard
MT	0.2 < P ≤ 1 kW	COP ≥ 1.40
	1 < P ≤ 5 kW	COP ≥ 1.60
	5 < P ≤ 20 kW	SEPR ≥ 2.55
	P ≤ 2 kW	COP ≥ 0.95
BT	2 < P ≤ 8 kW	SEPR ≥ 1.60

230V 50Hz / 400 3N 50Hz | Positive temp. | Low-noise condensing units | Hermetic compressor | R-134a / R-449A

Series / Model	Compressor		Cooling capacity EN13215 (W) ⁽¹⁾	Cooling capacity (W) ⁽²⁾ Average evaporating temperature				Input power (kW)	(COP) SEPR ⁽³⁾	Max. current (A)	Fan Ø mm	Flow (m³/h)	Liq-Gas cooling connection	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price without electronic control (€)	
	HP	Power supply	Evap. temp. -10 °C	0 °C	-5 °C	-10 °C	-15 °C										
R-134a	MDF-NY-0 010	3/8	230V	570	880	710	560	430	0.33	(1.75)	4	Ø 200	350	1/4"-3/8"	50	28	1 916
	MDF-NY-0 015	1/2	230V	795	1 200	975	775	595	0.46	(1.73)	5	Ø 200	350	1/4"-3/8"	52	29	2 044
	MDF-NY-1 015	1/2	230V	875	1 395	1 110	865	650	0.49	(1.78)	5	Ø 360	1 700	1/4"-1/2"	66	31	2 158
	MDF-NY-1 026	3/4	230V	1 340	2 160	1 710	1 315	980	0.71	(1.89)	9	Ø 360	1 700	1/4"-1/2"	74	31	2 300
	MDF-NY-1 033	1	230V	1 730	2 700	2 160	1 685	1 280	0.82	(2.11)	9	Ø 360	1 700	1/4"-5/8"	76	31	2 618
	MDF-NY-1 053	1 1/2	230V *	2 425	3 975	3 115	2 360	1 710	1.04	(2.33)	12	Ø 360	1 700	1/4"-3/4"	88	32	3 103
	MDF-NY-1 074	2	230V *	3 150	5 080	4 005	3 045	2 210	1.37	(2.29)	16	Ø 360	1 700	1/4"-3/4"	90	36	3 905
	MDF-NY-2 086 ⁽⁵⁾	4	400V 3N	4 230	6 800	5 360	4 130	3 090	1.84	(2.32)	13	Ø 450	3 600	3/8"-7/8"	98	38	4 383
	MDF-NY-2 108 ⁽⁵⁾	5	400V 3N	5 175	8 280	6 535	5 035	3 765	2.23	3.23	16	Ø 450	3 600	3/8"-7/8"	100	35	4 645
	MDF-NY-2 136 ⁽⁵⁾	6 1/2	400V 3N	6 575	10 140	8 200	6 385	4 835	2.99	2.87	19	Ø 450	3 600	3/8"-1 1/8"	103	34	5 327
R-449A	MDF-NG-0 008	1/3	230V	570	965	790	635	490	0.36	(1.71)	4	Ø 200	350	1/4"-3/8"	51	28	1 804
	MDF-NG-0 010	3/8	230V	735	1 210	1 000	805	635	0.46	(1.72)	5	Ø 200	350	1/4"-3/8"	51	29	1 925
	MDF-NG-0 012	1/2	230V	870	1 395	1 160	945	755	0.54	(1.74)	6	Ø 200	350	1/4"-3/8"	51	29	2 035
	MDF-NG-1 014	1/2	230V	1 075	1 870	1 515	1 200	930	0.66	(1.71)	6	Ø 360	1 700	1/4"-1/2"	66	32	2 169
	MDF-NG-1 016	5/8	230V	1 220	2 200	1 770	1 385	1 040	0.74	(1.77)	7	Ø 360	1 700	1/4"-1/2"	76	32	2 343
	MDF-NG-1 018	3/4	230V	1 525	2 630	2 140	1 710	1 310	0.88	(1.85)	8	Ø 360	1 700	1/4"-1/2"	76	32	2 465
	MDF-NG-1 024	1	230V	1 940	3 485	2 815	2 195	1 650	1.01	(2.04)	12	Ø 360	1 700	3/8"-5/8"	78	32	2 702
	MDF-NG-1 026	1 1/4	230V *	2 185	3 790	3 085	2 455	1 870	1.13	(2.05)	13	Ø 360	1 700	3/8"-5/8"	78	32	2 762
	MDF-NG-1 034	1 1/2	230V *	2 820	4 765	3 895	3 125	2 420	1.6	(1.91)	16	Ø 360	1 700	3/8"-5/8"	78	32	2 855
	MDF-NG-1 038 ⁽⁵⁾	1 3/4	400V 3N	3 105	5 315	4 320	3 440	2 650	1.53	(2.11)	7	Ø 450	3 200	3/8"-5/8"	81	29	3 476
	MDF-NG-2 048 ⁽⁵⁾	2	400V 3N	3 985	6 805	5 525	4 410	3 410	1.89	(2.25)	8	Ø 450	3 600	3/8"-3/4"	85	26	3 903
	MDF-NG-2 054 ⁽⁵⁾	2 1/2	400V 3N	4 595	7 660	6 250	5 020	3 950	2.09	(2.35)	9	Ø 450	3 600	3/8"-3/4"	86	26	4 132
	MDF-NG-2 060 ⁽⁵⁾	3	400V 3N	5 300	8 655	7 105	5 750	4 575	2.48	3.26	10	Ø 450	3 600	3/8"-3/4"	87	26	4 510
	MDF-NG-2 068 ⁽⁵⁾	3 1/2	400V 3N	5 975	9 635	7 955	6 460	5 160	2.85	3.14	10	Ø 450	3 600	1/2"-3/4"	88	25	4 738

230V 50Hz / 400V 3N 50Hz | Negative temperature | Low-noise condensing units | Hermetic compressor | R-449A / R-452A

Series / Model	Compressor		Cooling capacity EN13215 (W) ⁽¹⁾	Cooling capacity (W) ⁽²⁾			Input power (kW)	(COP) SEPR ⁽³⁾	Max. current (A)	Fan Ø mm	Flow (m³/h)	Liq-Gas cooling connection	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price without electronic control (€)	
	HP	Power supply	Evap. temp. -35 °C	-25 °C	-30 °C	-35 °C										
R-449A	BDF-NG-0 018	5/8	230V	335	795	600	415	0.43	(0.96)	6	Ø 200	350	1/4"-1/2"	58	28	2 512
	BDF-NG-1 026	3/4	230V	545	1 285	945	655	0.67	(0.97)	9	Ø 360	1 700	1/4"-1/2"	76	31	3 045
	BDF-NG-1 034	1 1/4	230V	720	1 690	1 245	865	0.90	(0.95)	10	Ø 360	1 700	3/8"-5/8"	79	32	3 458
	BDF-NG-1 055	1 3/4	230V *	920	2 425	1 745	1 160	1.17	(0.99)	16	Ø 360	1 700	3/8"-5/8"	85	34	3 905
	BDF-NG-1 075	2 1/2	230V *	1 360	3 125	2 375	1 645	1.56	(1.06)	24	Ø 360	1 700	3/8"-5/8"	90	36	3 980
R-452A	BDF-NB-2 096	3 1/2	400V 3N	1 570	4 055	2 930	1 945	1.64	(1.21)	11	Ø 450	3 600	3/8"-3/4"	98	39	5 373
	BDF-NB-2 108	4	400V 3N	2 015	4 700	3 475	2 390	1.95	1.65	13	Ø 450	3 600	3/8"-7/8"	98	37	5 749
	BDF-NB-2 136	5	400V 3N	2 665	5 855	4 425	3 125	2.59	1.60	15	Ø 450	3 600	3/8"-7/8"	98	32	6 124
	BDF-NB-3 215	7 1/2	400V 3N	4 040	9 125	6 865	4 785	3.83	1.65	24	2x Ø 450	6 500	1/2"-1 1/8"	149	39	7 740
	BDF-NG-3 271	10	400V 3N	5 840	11 755	9 020	6 600	5.13	1.68	28	2x Ø 450	6 500	1/2"-1 1/8"	149	39	8 076

Options

- Change to 400V 3N 50Hz power supply. + 8 %
- Built-in oil separator (already included in -V version). + 716 €
- Built-in solenoid valve with body and coil (except -V version). + 178 €
- Anti-corrosion coil coating. + 8 %
- Coil protection grille. + 112 €
- Proportional condensation control by fan speed variator (single-phase 1 series). + 304 €
- Control and power panel with electronic control unit for management of condenser and evaporator (except BDF-NG-0 018 model). + 5 %
- Larger sized multifunction electronic control. + 184 €

Versions

- -V version. Multi-service version with VRC system (with oil separator). Table models with ^(v). + 1 225 €

⁽¹⁾ Conditions based on UNE-EN 13215: ambient temp. 32 °C, average evap. temp. -35 °C (NT), 20 °C of suction temperature.

⁽²⁾ Cooling capacity in nominal conditions: average evaporating temp -35 °C (NT), ambient temperature of 32 °C, overheating 10 K, refrigerant R-449A.

⁽³⁾ COP/SEPR: Coefficient of Performance according to Ecodesign Directive 2015/1095/EU ErP 2015/1095/UE.


	Cooling capacity	Ecodesign standard
MT	$0.2 < P \leq 1 \text{ kW}$	$\text{COP} \geq 1.40$
	$1 < P \leq 5 \text{ kW}$	$\text{COP} \geq 1.60$
	$5 < P \leq 20 \text{ kW}$	$\text{SEPR} \geq 2.55$
BT	$P \leq 2 \text{ kW}$	$\text{COP} \geq 0.95$
	$2 < P \leq 8 \text{ kW}$	$\text{SEPR} \geq 1.60$

⁽⁴⁾ Sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

^(v) Model that allow VRC system.

* Units available in 400V 3N 50Hz voltage.

Scheme

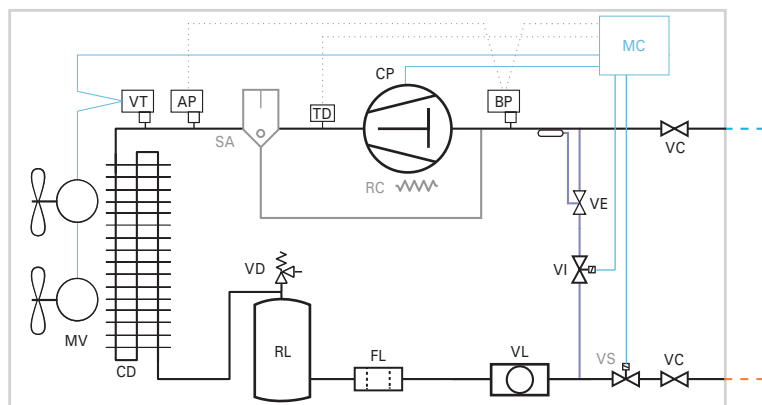

STANDARD

- AP: HIGH PRESSURE SWITCH
- BP: LOW PRESSURE SWITCH
- CD: CONDENSER
- CP: COMPRESSOR
- FL: FILTER
- MV: MOTOR FAN
- RL: LIQUID VESSEL
- RC: CRANKCASE HEATER
- VC: SERVICE VALVE
- VD: SECURITY VALVE (UP TO 1 HP)
- VL: SIGHT GAUGE
- VT: VOLTAGE REGULATOR

OPTIONAL

- SA: OIL SEPARATOR
- VS: SOLENOID VALVE

LIQUID INJECTION SYSTEM (ONLY BDF)


- TD: DISCHARGE THERMOSTAT
- VE: THERMOSTATIC EXPANSION VALVE
- VI: LIQUID SOLENOID VALVE

ADDITIONAL -N VERSION


- MC: ELECTRONIC MICRO-CONTROLLER

Dimensions (DF)


0 series




1 series

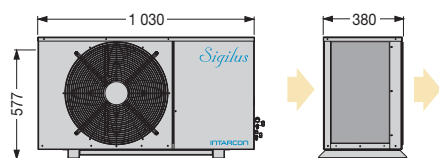

2 series

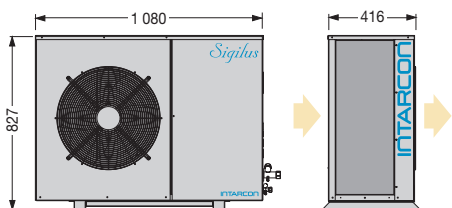

3 series

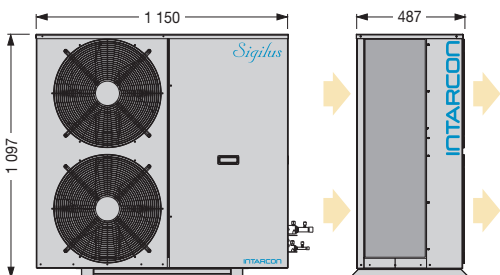

Measuring mm.

MDF-N and BDF-N (with optional electronic control)

Sigilus condensing units with optional electronic control incorporate an advanced electronic controller XM670K for the management of the condensing unit and the evaporator, being able to optionally integrate the solenoid valve.



- Multifunction remote digital control.
- Electronic board integrated in the condensing unit for 6 control relays for: compressor, condensing fan, evaporator fan, defrost, light and alarm.
- Possibility of interconnection and synchronization of up to 8 devices by LAN, managed from a single control.

Liquid injection system

Negative temperature condensing units incorporate a safety cooling system for the motor by liquid injection into the compressor suction.

R-499A and R-448A refrigerants have high gas discharge temperature under conditions of high compression ratio and high suction gas superheat.

To protect the motor windings and preserve oil stability, compressor cooling is necessary in certain situations.



Air-cooled packaged condensing units at positive or negative temperature, in horizontal construction with an alternative hermetic compressor, and low speed axial or centrifugal motor fan.

Features


- ▶ 230V 50Hz or 400V 3N 50Hz power supply. Available in 60Hz. Others voltages by request.
- ▶ R-134a or R-449A refrigerant, other refrigerants by request.
- ▶ Hermetic reciprocating compressor mounted on shock absorbers, with discharge muffler and internal klixon.
- ▶ High performance condensing coil in copper pipes and aluminium fins.
- ▶ Centrifugal motor fan with available static pressure for a ducted outlet of condenser hot air (centrifugal version).
- ▶ Refrigeration circuit equipped with HP and LP switches, filter dryer, liquid receiver and sight gauge.
- ▶ Digital control of condensation pressure with the optional electrical board, and all-nothing condensation control with condensers without electrical panel.
- ▶ Proportional control of condensing pressure through fan speed variation (included in MDH series 4).
- ▶ Full control and power board with compressor and motor fan protection.
- ▶ Electronic regulation with evaporator control pad (-N version with optional electrical board).
- ▶ Built-in oil separator (-V multi-service version).
- ▶ Liquid injection system for negative temperature models with R-449A.

Versions

- ▶ **-N version:** Without electrical board. Designed for on/off operation depending on the suction pressure (pump-down). With electrical board as an option. Electronic controller to manage the condensing unit and the evaporator built-in solenoid valve as an option.
- ▶ **-V version (multi-service):** The multi-service version features VRC system to adjust the refrigerant flow to the demand of the evaporators, keeping the pressure constant in suction the line. The VRC system is composed of a set of pressure and temperature regulation valves to progressively modulate cooling capacity from 100 % to 10 % of its nominal capacity, while reducing energy consumption and preventing compressor overheating.

- ❄ Designed for ambient temperature up to 45 °C.
- ❄ Multi-service version with VRC cooling capacity modulation system.
- ❄ Liquid injection system for compressor refrigeration.


Installation scheme (-C version with electronic control)

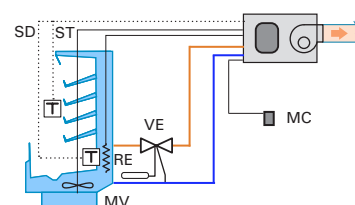

MC:	CONTROL PAD
MV:	MOTOR FAN
RE:	DEFROST HEATER
ST:	THERMOSTAT PROBE
SD:	DEFROST PROBE
VE:	EXPANSION VALVE
VS:	SOLENOID VALVE

Centrifugal fan (centrifugal version)

intarbox condensing units feature centrifugal motor fans for a ducted outlet of condenser hot air.

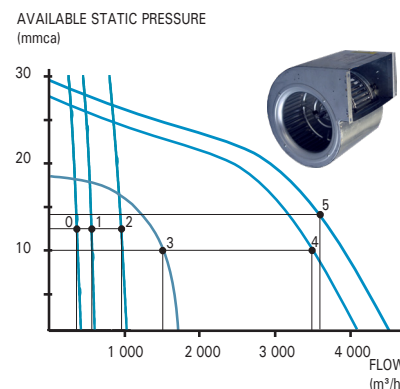

Exhaust duct

Recommended size for 20 m long steel, PVC or fibreglass ducts (each elbow equals 5 m length). For flexible or semi-flexible ducts use a larger size.

■ 0 series:	200 x 150 mm or Ø 150 mm
■ 1 series:	200 x 200 mm or Ø 150 mm
■ 2 series:	250 x 150 mm or Ø 200 mm
■ 3 series:	200 x 300 mm or Ø 250 mm
■ 4 and 5 series:	350 x 400 mm or Ø 360 mm

230V 50Hz / 400V 3N 50Hz | Positive temperature | Hermetic compressor | R-134a / R-449A

Axial version		Compressor		Cooling capacity EN13215 (W) ⁽¹⁾ Evap. temp. -10 °C	Cooling capacity (W) ⁽²⁾				Input power (kW)	(COP) SEPR ⁽³⁾	Max. current (A)	Liq-Gas cooling connection	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price without electronic control (€)	Centrifugal version	Flow (m³/h)	ASP (mmca) ⁽⁵⁾	Price without electronic control (€)
Series / Model	HP	Power supply	Average evaporating temperature				Series / Model												
			0 °C		-5 °C	-10 °C	-15 °C												
R-134a	MDH-NY-0 010	3/8	230V	575	890	715	565	430	0.37	(1.54)	4	1/4"-3/8"	45	29	1 553	MDH-CY-0 010	375	80	1 779
	MDH-NY-0 015	1/2	230V	800	1 215	985	785	600	0.51	(1.58)	5	1/4"-3/8"	47	32	1 706	MDH-CY-0 015	375	80	2 007
	MDH-NY-1 015	1/2	230V	840	1 305	1 050	825	630	0.50	(1.69)	5	1/4"-1/2"	50	32	1 777	MDH-CY-1 015	575	80	2 141
	MDH-NY-1 026	3/4	230V	1 225	1 910	1 530	1 200	900	0.72	(1.72)	9	1/4"-1/2"	58	30	2 118	MDH-CY-1 026	575	80	2 288
	MDH-NY-1 033	1	230V	1 555	2 325	1 890	1 505	1 155	0.83	(1.87)	9	1/4"-1/2"	60	33	2 180	MDH-CY-1 033	575	80	2 695
	MDH-NY-2 053	1 1/2	230V *	2 210	3 505	2 785	2 130	1 565	1.06	(2.08)	12	1/4"-5/8"	70	38	2 776	MDH-CY-2 053	1 000	120	3 280
	MDH-NY-3 074	2	230V *	3 045	4 855	3 845	2 940	2 140	1.36	(2.23)	16	1/4"-3/4"	90	44	3 402	MDH-CY-3 074	1 500	140	3 747
	MDH-NY-4 086 ⁽⁶⁾	4	400V 3N	4 160	6 660	5 270	4 065	3 040	2.02	(2.09)	14	3/8"-7/8"	97	48	4 055	MDH-CY-4 086 ⁽⁶⁾	3 500	100	5 138
	MDH-NY-4 108 ⁽⁶⁾	5	400V 3N	5 065	7 940	6 380	4 935	3 690	2.46	2.85	17	3/8"-7/8"	99	45	4 526	MDH-CY-4 108 ⁽⁶⁾	3 500	100	5 607
	MDH-NY-4 136 ⁽⁶⁾	6 1/2	400V 3N	6 410	9 595	7 825	6 215	4 720	3.33	2.56	20	3/8"-1 1/8"	102	44	4 948	MDH-CY-4 136 ⁽⁶⁾	3 500	100	6 033
R-449A	MDH-NG-0 008	1/3	230V	570	975	800	640	490	0.40	(1.50)	4	1/4"-3/8"	46	31	1 435	MDH-CG-0 008	375	80	1 636
	MDH-NG-0 010	3/8	230V	745	1 225	1 010	815	640	0.50	(1.57)	5	1/4"-3/8"	46	34	1 480	MDH-CG-0 010	375	80	1 816
	MDH-NG-0 012	1/2	230V	880	1 415	1 175	955	760	0.58	(1.61)	6	1/4"-3/8"	46	34	1 550	MDH-CG-0 012	375	80	1 941
	MDH-NG-1 014	1/2	230V	1 065	1 740	1 435	1 165	925	0.67	(1.69)	6	1/4"-1/2"	50	34	1 686	MDH-CG-1 014	575	80	2 018
	MDH-NG-1 016	5/8	230V	1 190	1 985	1 630	1 310	1 020	0.75	(1.71)	7	1/4"-1/2"	60	34	1 874	MDH-CG-1 016	575	80	2 156
	MDH-NG-1 018	3/4	230V	1 440	2 325	1 925	1 565	1 240	0.90	(1.73)	8	1/4"-1/2"	60	34	1 970	MDH-CG-1 018	575	80	2 366
	MDH-NG-2 024	1	230V	1 915	3 215	2 630	2 105	1 635	1.06	(1.93)	12	3/8"-5/8"	60	35	2 162	MDH-CG-2 024	1 000	120	2 713
	MDH-NG-2 026	1 1/4	230V *	2 130	3 485	2 870	2 320	1 830	1.19	(1.91)	13	3/8"-5/8"	61	36	2 196	MDH-CG-2 026	1 000	120	2 922
	MDH-NG-2 034	1 1/2	230V *	2 635	4 240	3 525	2 865	2 260	1.66	(1.72)	16	3/8"-5/8"	61	37	2 260	MDH-CG-2 034	1 000	120	3 059
	MDH-NG-3 038 ^{(6)*}	1 3/4	400V 3N	2 985	4 890	4 025	3 250	2 555	1.51	(2.12)	6	3/8"-5/8"	78	39	2 855	MDH-CG-3 038 ^{(6)*}	1 500	140	3 939
	MDH-NG-4 048 ⁽⁶⁾	2	400V 3N	3 955	6 685	5 430	4 345	3 390	2.07	(2.06)	13	3/8"-3/4"	95	36	3 492	MDH-CG-4 048 ⁽⁶⁾	3 500	100	4 573
	MDH-NG-4 054 ⁽⁶⁾	2 1/2	400V 3N	4 535	7 515	6 145	4 940	3 900	2.30	(2.13)	14	3/8"-3/4"	96	36	3 906	MDH-CG-4 054 ⁽⁶⁾	3 500	100	4 990
	MDH-NG-4 060 ⁽⁶⁾	3	400V 3N	5 220	8 435	6 980	5 655	4 505	2.74	2.97	15	3/8"-3/4"	97	36	4 388	MDH-CG-4 060 ⁽⁶⁾	3 500	100	5 546
	MDH-NG-4 068 ⁽⁶⁾	3 1/2	400V 3N	5 880	9 330	7 775	6 345	5 075	3.16	2.86	15	1/2"-3/4"	98	35	4 517	MDH-CG-4 068 ⁽⁶⁾	3 500	100	6 171

230V 50Hz / 400V 3N 50Hz | Negative temperature | Hermetic compressor | R-449A / R-452A

Axial version		Compressor		Cooling capacity EN13215 (W) ⁽¹⁾	Cooling capacity (W) ⁽²⁾			Input power (kW)	(COP) SEPR ⁽³⁾	Max. current (A)	Liq-Gas cooling connection	Weight (kg)	SPL dB(A) ⁽⁴⁾	Price without electronic control (€)	Centrifugal version	Flow (m³/h)	ASP (mmca) ⁽⁵⁾	Price without electronic control (€)
Series / Model		HP	Power supply	Evap. temp. -35 °C	-25 °C	-30 °C	-35 °C								Average evaporating temperature			
R-449A	BDH-NG-1 026	3/4	230V	540	1 220	930	660	0.67	(0.97)	9	1/4"-1/2"	51	31	2 295	BDH-CG-1 026	575	80	2 496
	BDH-NG-1 034	1 1/4	230V	715	1 525	1 170	860	0.90	(0.95)	10	1/4"-1/2"	52	33	2 369	BDH-CG-1 034	575	80	2 555
	BDH-NG-2 055	1 3/4	230V *	915	2 265	1 700	1 165	1.21	(0.95)	13	3/8"-5/8"	61	41	3 022	BDH-CG-2 055	1 000	120	3 245
	BDH-NG-2 075	2 1/2	230V *	1 355	2 855	2 200	1 620	1.60	(1.02)	25	3/8"-5/8"	66	44	3 096	BDH-CG-2 075	1 000	120	3 317
	BDH-NB-3 096	3 1/2	400V 3N	1 595	3 655	2 755	1 875	1.68	(1.16)	11	3/8"-3/4"	88	49	4 477	BDH-CB-3 096	1 500	140	4 869
R-452A	BDH-NB-4 108	4	400V 3N	2 010	4 630	3 450	2 400	2.08	1.62	14	3/8"-7/8"	108	47	5 710	BDH-CB-4 108	3 500	100	6 162
	BDH-NB-5 136	5	400V 3N	2 665	5 995	4 490	3 150	2.72	1.61	16	3/8"-1 1/8"	152	42	7 661	BDH-CB-5 136	3 600	100	8 189
	BDH-NB-5 215	7 1/2	400V 3N	4 040	8 750	6 575	4 730	3.92	1.60	24	1/2"-1 1/8"	183	49	8 164	BDH-CB-5 215	3 600	100	8 713

Options

- Change to 400V 3N 50Hz power supply. + 8 %
- Proportional control of condensing pressure through speed variation (axial 3 series and centrifugal 0 up to 3 series).
Axial version: 3 series + 304 €
Centrifugal version: 0 up to 3 series + 486 €
- Built-in oil separator (already included in -V version). + 716 €
- Crankcase heater. + 75 €
- Built-in solenoid valve with body and coil (except for -V version). + 178 €
- Anti-corrosion coil coating. + 8 %
- Non-return damper (centrifugal version). + 67 €
- Adaptation of air discharge to circular duct. + 123 €
- Vertical discharge (centrifugal version).
- Control and power panel with electronic control unit for management of condenser and evaporator. + 5 %
Larger sized multifunction electronic control. + 184 €

Versions

- V version. Multi-service version with VRC system (with oil separator). Table models with ^(v). + 1 225 €

⁽¹⁾ Conditions based on UNE-EN 13215: ambient temp. 32 °C, average evap. temp. -10 °C (PT) and -35 °C (NT), 20 °C of suction temperature.

⁽²⁾ Conditions based on UNE-EN 13215: ambient temp. 32 °C, average evap. temp. -10 °C (PT) and -35 °C (NT), overheating 10 K.

⁽³⁾ COP / SEPR: Coefficient of Performance according to Ecodesign Directive 2015/1095/EU.

	Cooling capacity		Ecodesign	
	0,2 < P ≤ 1 kW		COP ≥ 1.40	
E	1 < P ≤ 5 kW		COP ≥ 1.60	
	5 < P ≤ 20 kW		SEPR ≥ 2.55	
E	P ≤ 2 kW		COP ≥ 0.95	
	2 < P ≤ 8 kW		SEPR ≥ 1.60	

⁽⁴⁾ Sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).


⁽⁵⁾ Available static pressure condensation.

^(v) Model that allow VRC system.

^{(v)*} Requires proportional control of condensing pressure.

* Units available with 400V 3N 50Hz power supply.

Refrigeration scheme DH - Centrifugal

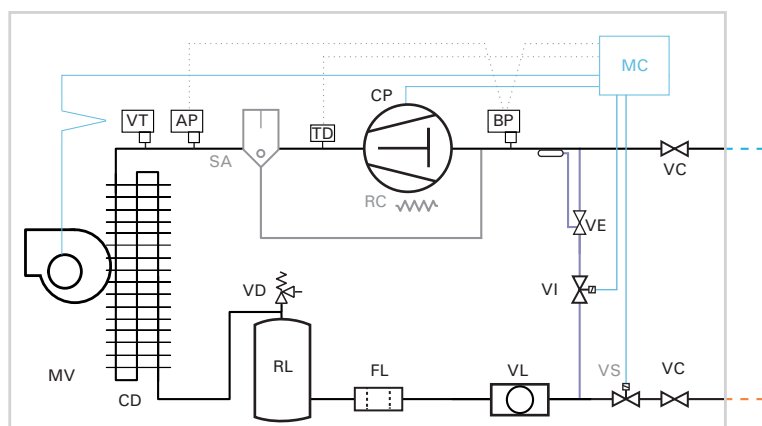

STANDARD

CD: CONDENSER
 CP: COMPRESSOR
 FL: FILTER DRYER
 MV: MOTOR FAN
 RL: LIQUID RECEIVER
 VL: SIGHT GAUGE
 VC: 3 WAYS SERVICE VALVE
 (UP TO 3/4" CONNECTIONS)

VD: SECURITY VALVE

OPTIONAL

RC: CRANKCASE HEATER
 SA: OIL SEPARATOR
 VS: SOLENOID VALVE


LIQUID INJECTION SYSTEM (ONLY BDH)

TD: DISCHARGE THERMOSTAT
 VE: EXPANSION VALVE
 VI: LIQUID SOLENOID VALVE

ADDITIONAL - N VERSION


MC: ELECTRONIC MICRO-CONTROLLER

Dimensions DH - Axial

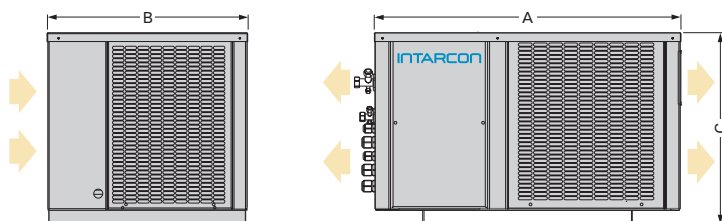

Dimensions (mm)	A	B	C
0 series	600	396	355
1 series	665	435	416
2 series	835	435	500
3 series	925	580	515
4 series	1 000	615	585
5 series	1 289	757	657

Dimensions DH - Centrifugal

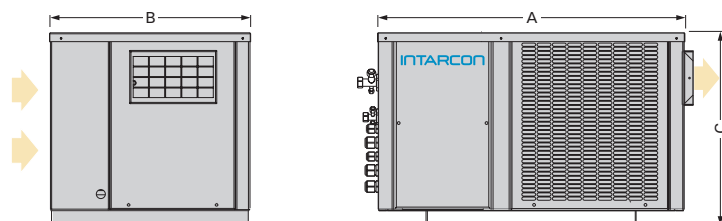

Dimensions (mm)	A	B	C	Fan outlet	Hopper
0 series	600	396	355	185 x 115	Ø 150
1 series	665	435	416	185 x 115	Ø 150
2 series	835	435	500	230 x 130	Ø 200
3 series	925	580	515	266 x 236	Ø 250
4 series	1 000	615	585	305 x 266	Ø 360
5 series	1 289	757	657	305 x 266	Ø 360

MDH-N and BDH-N (with optional electronic control)

intarbox condensing units with the optional electronic control incorporate an advanced electronic controller XM670K for the management of the condensing unit and the evaporator, being able to optionally integrate the solenoid valve.



- Multifunction remote digital control.
- Electronic board integrated in the condensing unit for 6 control relays for: compressor, condensing fan, evaporator fan, defrost, light and alarm.
- Possibility of interconnection and synchronization of up to 8 devices by LAN, managed from a single control.

Ecodesign of condensing units

Regulation (EU) 2015/1095 establishes a series of Ecodesign requirements. For condensing units up to 5 kW and 2 kW in PT and NT respectively, a minimum value requirement is established for the coefficient of performance COP, while for higher power unit the requirement refers to a normalized seasonal performance SEPR.

At INTARCON we have redesigned our product range to adapt to the Ecodesign directive, incorporating energy efficiency technologies, electronic motor fans and floating condensation control.

Variable Refrigerant Capacity




Multi-service version, featuring VRC system (Variable Refrigerant Capacity), of refrigeration capacity control, applicable to hermetic alternative compressors, consisting of:

- ▶ Suction pressure valve (VP).
- ▶ By-pass pressure valve (VC).
- ▶ Thermostatic expansion valve for liquid injection (VE).
- ▶ Pressure control switch (IP).
- ▶ Built-in oil separator.

Multi-service versions of condensing units:


- ▶ Horizontal axial or centrifugal multi-service version.
intarbox-multi: MDH-CV/-V series.
- ▶ Horizontal axial low-noise multi-service version.
Sigilus-multi: MDF-V series.

Scheme

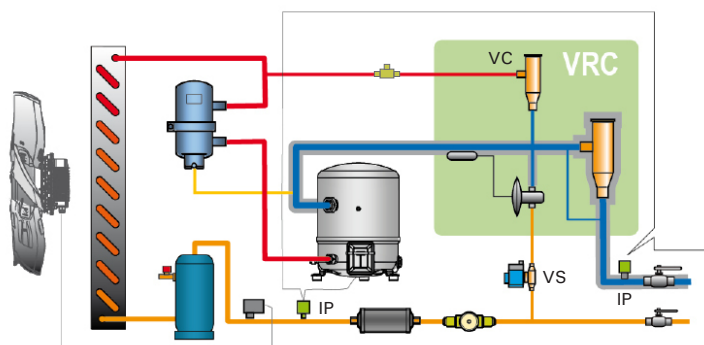

Example of multi-service installation

Units specifically designed for the centralisation of cooling production of several evaporators.

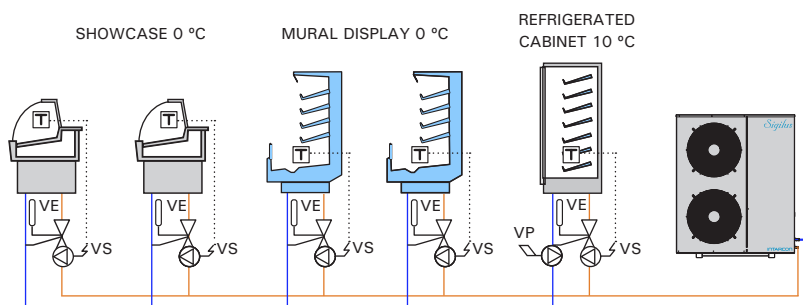


- ❄ Cooling capacity control.
- ❄ Constant evaporation pressure.
- ❄ Set services refrigeration production centralization.

VRC system is composed of a set of pressure and temperature valves capable of progressive variation of a compressor's cooling capacity between 100 % and 10 % of this rated power, at the same time the system reduces electrical input power and protects the compressor, maintaining its compression ratio within security margins, eliminating the risk of overheating.

VRC system: Variable Refrigerant Capacity


VRC system applied to a reciprocating hermetic compressor adjusts the flow of refrigerant to the evaporator unit's demand by maintaining constant pressure in the suction line.

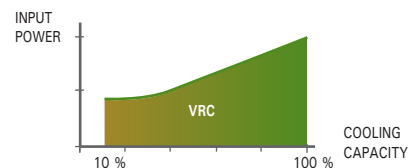

VRC system is characterized by:

- Consisting exclusively of high reliability mechanical components.
- Keeps the evaporation pressure constant.
- Protects the compressor against the risk of engine overheating.
- Maintains the compression ratio of the compressor within the safety limits.

Condensing units equipped with VRC system allow centralizing the refrigeration production of a set of services, maintaining constant the pressure and temperature of the refrigerant in the evaporators.

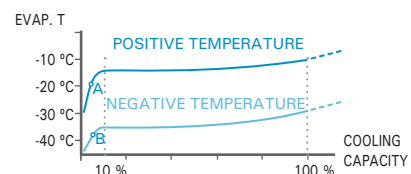

VRC system can be easily regulated to set a minimum evaporation pressure. The factory setting provides the following minimum evaporation temperatures:

- Positive temperature units: -13 °C
- Negative temperature units: -35 °C

With demand below 10 % of the nominal power, the characteristic of the evaporation pressure curve falls towards the minimum value admitted by the compressor, disconnecting the low pressure switch (points A and B) and stopping the compressor.

In this way, the multi-service condensing units are designed for low-pressure stop / start control (drop down or pump down).

Alternatively, the compressor running stop can be done through an external open / closed contact.



Cooling connections

INTARCON commercial range split units are delivered pre-adjusted in factory, with a R-134a or R-449A refrigerant load enough for up to 10 m of cooling pipes.

Condensing units feature service valves and Flare-type connections for a flared copper pipe for diameters up to 3/4" and ready-to-solder connections for diameters from 7/8".

We recommend using the following nominal pipe diameters for both, liquid and gas lines, according to the length of the cooling pipes. For total length longer than 10 m some extra refrigerant and polyester oil (POE) load must be added as indicated in the following table:

		Connection and recommended liquid-gas pipe diameter depending on pipe length							Additional charge in grams of refrigerant / oil			
Model		Connections	5 m	10 m	15 m	20 m	25 m	30 m	15 m	20 m	25 m	30 m
HIGH TEMPERATURE	- 015	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"							
	- 026	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"			125 / 100			
	- 033	Flare 1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"		125 / 150	250 / 300	375 / 450	500 / 450
	- 053	Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	300 / 200	600 / 400	900 / 600	1 200 / 600
	- 074	Flare 3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	300 / 200	600 / 400	900 / 600	1 200 / 600
	- 086	Weld 3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	300 / 250	600 / 500	900 / 750	1 200 / 750
	- 108	Weld 3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	300 / 250	600 / 500	900 / 750	1 200 / 750
	- 136	Weld 1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	600 / 250	1 200 / 500	1 800 / 750	2 400 / 750
	- 160	Weld 1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 3/8"	1/2"-1 3/8"	600 / 250	1 200 / 600	1 800 / 900	2 400 / 900
	- 215	Weld 1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	600 / 300	1 200 / 600	1 800 / 900	2 400 / 900
POSITIVE TEMPERATURE	- 010	Flare 1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-1/2"							
	- 0 015	Flare 1/4"-3/8"	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"							
	- 1 015	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-5/8"			125 / 100			
	- 026	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-5/8"	1/4"-5/8"		125 / 100			
	- 033	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-3/4"		125 / 100	250 / 300		
		Flare 1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-3/4"		125 / 100	250 / 300		
	- 053	Flare 1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"		125 / 150	250 / 300		
		Flare 1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"		125 / 150	250 / 300		
	- 074	Flare 1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	3/8"-7/8"	3/8"-7/8"	125 / 150	1 200 / 400	1 500 / 600	1 800 / 600
		Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	300 / 150	600 / 400	900 / 600	1 200 / 600
HIGH TEMPERATURE	- 068	Flare 1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	125 / 150	800 / 400	1 100 / 600	1 400 / 600
		Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	300 / 200	600 / 400	900 / 600	1 200 / 600
	- 086	Weld 3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	300 / 200	600 / 400	900 / 750	1 200 / 750
	- 108	Weld 3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	3/8"-1 1/8"	300 / 200	600 / 500	900 / 750	1 200 / 750
	- 136 / - 171	Weld 3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	300 / 250	600 / 500	900 / 750	1 200 / 750
	- 215	Weld 3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	1/2"-1 1/8"	1/2"-1 3/8"	1/2"-1 3/8"	600 / 250	1 200 / 600	1 800 / 900	2 400 / 900
	- 271	Weld 1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	1/2"-1 3/8"	600 / 300	1 200 / 600	1 800 / 900	2 400 / 900
	- 008 / - 010	Flare 1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"							
	- 012	Flare 1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"			100 / 25			
	- 014	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	300 / 50	600 / 100	900 / 150	1 200 / 150
- 016	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	300 / 50	600 / 100	900 / 150	1 200 / 150	
- 018	Flare 1/4"-1/2"	1/4"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	3/8"-1/2"	300 / 50	600 / 100	900 / 150	1 200 / 150	
- 024 / - 026	Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	300 / 100	600 / 200	900 / 300	1 200 / 300	
- 034	Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	300 / 100	600 / 450	900 / 600	1 200 / 600	
- 038	Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	300 / 150	600 / 450	900 / 600	1 200 / 600	
- 048	Flare 1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-7/8"	1/2"-7/8"	600 / 150	1 100 / 300	1 700 / 800	2 300 / 800	
- 054	Flare 1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-7/8"	1/2"-7/8"	600 / 150	1 100 / 600	1 700 / 800	2 300 / 800	
- 060 / - 068	Weld 1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	900 / 400	1 800 / 800	2 700 / 1200	3 600 / 1 200	
- 086 / - 108	Weld 5/8"-1 1/8"	5/8"-1 1/8"	5/8"-1 1/8"	5/8"-1 1/8"	5/8"-1 1/8"	5/8"-1 1/8"	5/8"-1 1/8"	900 / 400	1 800 / 800	2 700 / 1200	3 600 / 1 200	
- 008 / - 010	Flare 1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-3/8"								
POSITIVE TEMPERATURE	- 012	Flare 1/4"-3/8"	1/4"-3/8"	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"			100 / 50			
	- 014	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"			100 / 50			
	- 016	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"		100 / 50	200 / 100		
	- 018	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"		100 / 50	200 / 100		
	- 024	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	3/8"-1/2"	3/8"-1/2"		100 / 50	900 / 100		
		Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	300 / 100	600 / 200	900 / 300	1 200 / 300
	- 026	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	3/8"-5/8"	3/8"-5/8"	100 / 25	200 / 50	300 / 100	1 000 / 250
		Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	300 / 100	600 / 200	900 / 300	1 200 / 300
	- 034	Flare 1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	100 / 25	500 / 125	800 / 200	1 000 / 250
		Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	300 / 100	600 / 450	900 / 600	1 200 / 600
- 038	Flare 1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	100 / 25	500 / 125	800 / 200	1 000 / 250	
	Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	300 / 100	600 / 450	900 / 600	1 200 / 600	
- 048	Flare 1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-7/8"	1/2"-7/8"	500 / 125	1 000 / 250	1 500 / 350	2 000 / 500	
	Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	300 / 75	500 / 125	800 / 200	1 000 / 250	
- 054	Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	300 / 150	600 / 300	900 / 450	1 200 / 450	
	Flare 1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-1 1/8"	500 / 125	1 000 / 250	1 500 / 350	2 000 / 500	
- 060	Flare 1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-1 1/8"	500 / 125	1 000 / 250	1 500 / 350	2 000 / 500	
	Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	300 / 75	500 / 125	800 / 250	1 000 / 250	
- 068	Flare 1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-3/4"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	600 / 300	1 100 / 600	1 700 / 800	2 300 / 800	
	Flare 3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	250 / 60	500 / 125	700 / 200	800 / 200	
- 086	Weld 1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	600 / 300	1 100 / 600	1 700 / 800	2 300 / 800	
- 108	Weld 1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-7/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	600 / 400	1 100 / 800	1 700 / 1 200	2 300 / 1 200	
- 136	Weld 1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	600 / 400	1 100 / 800	1 700 / 1 200	2 300 / 1 200	
NEGATIVE TEMPERATURE	- 018	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"							
		Flare 3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	250 / 200	500 / 400	750 / 500	1 000 / 750
	- 026	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	1/4"-1/2"			100 / 100			
	- 034	Flare 1/4"-1/2"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	300 / 100	600 / 200		
		Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	300 / 300	600 / 450	900 / 600	1 200 / 600
	- 055	Flare 1/4"-5/8"	1/4"-5/8"	1/4"-5/8"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	100 / 75	200 / 150	250 / 200	300 / 250
		Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	300 / 300	600 / 450	900 / 800	1 200 / 800
	- 075	Flare 1/4"-5/8"	1/4"-5/8"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	1/4"-3/4"	100 / 75	200 / 130	250 / 200	350 / 250
		Flare 3/8"-5/8"	3/8"-5/8"	3/8"-5/8"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	300 / 300	600 / 450	900 / 800	1 200 / 800
	- 096	Flare 1/4"-3/4"	1/4"-3/4"	1/4"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	250 / 200	500 / 350	700 / 500	1 000 / 750
Flare 3/8"-3/4"		3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	300 / 300	600 / 600	900 / 800	1 200 / 800	
- 108	Flare 1/4"-7/8"	1/4"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	250 / 200	500 / 350	750 / 550	1 000 / 750	
	Weld 3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	3/8"-1 1/8"	300 / 600	600 / 600	900 / 1 200	1 200 / 1 200	
	Weld 3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	300 / 400	600 / 800	900 / 1 200	1 200 / 1 200	
- 136	Weld 3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	3/8"-1 1/8"	250 / 200	500 / 350	750 / 550	1 000 / 750	
- 215	Weld 1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 1/8"	1/2"-1 3/8"	600 / 400	1 100 / 800	1 700 / 1 200	2 300 / 1 200	
- 271	Weld 1/2"-1 1/8"	1/2"-1 1/8"										

Electronic regulation

All our units incorporates state-of-the-art electronic controls, which ensures the safety of the cold room and care for the environment and the refrigeration equipment.

Features / Control	XM670K	XW270K	XH240K	XW60LH
Standard	Split systems	Monoblocks	With humidity control	R-290 monoblocks
Cold room temperature control	●	●	●	●
Digital control of condensing temperature	●	●		●
Cold room relative humidity control			●	
Time and temperature fast cooling cycle	●			
Time and temperature defrost cycle	●	●		●
Stop control with gas collection (pump-down)	●			
Energy save night operating mode	●	●		●
Time program with internal clock	●			
Digital condensing temperature control (2 speeds)	●	●		●
Proportional control of condensation with floating set-point	●			
Door opening contact	●	●		●
Recording of maximum and minimum temperatures		●		●
Maintenance quick access menu	●			
Available additional functions:	●	●		●
- Cold room light	●	●		●
- External alarm	●	●		●
- Heating resistance control	●	●		
- Safety heating	●	●		
- Liquid injection (split system at NT with R-449A)	●	●		
- Ventilation control	●			
Units synchronization	●			

Complete features of electronic controllers available at: www.intarcon.com

Self-diagnosis

The new XM electronics incorporate advanced self-diagnostic algorithms to detect anomalous operation, such as ice accumulation in the evaporator, or lack of gas. It also detects component malfunctions (defrosting resistors, fans or compressor) or probe failures, in anticipation of a potential break in the cold room.

XM670K

Standard control of:

■ SH / SF / DH / DF / DM / HF



XW270K

Standard control of:

■ CR / CV (except CV-L)



XH240K

Standard control of:

■ HSF / VSF / VSH / VCR



XW60LH

Standard control of:

■ CV-L / CP



Supervision and control system specialized in refrigeration and HVAC installations:

Features

- ▶ Plug & Play installation.
- ▶ Compatible with all brands.
- ▶ Hyper-connectivity (Wifi, 3G / 4G or Ethernet).
- ▶ Secure cloud data storage.

Real time remote control of the installation.


Alarms management and sending.

Historical temperatures recording.

Remote assistance for problem analysis.



kiconex features



Nombre	Modificado	Tamaño
01. MURAL CÁMERO Y QUEJOS		100.1 KB
02. MURAL DE CARNE		100.27 KB
03. ZUMOS, NATAS, MANTÉQUILLA Y YOGURES		100.27 KB
04. CARNE Y EDE PISCIA		100.27 KB
05. HORTALIZAS		100.27 KB
06. MURAL CONSEJADORES		100.1 KB

- ▶ Geolocation of installations.
- ▶ Multiple devices.
- ▶ Layout and installation synoptic.
- ▶ See parameters in real time.
- ▶ Temperatures and data history.
- ▶ Values recovery.
- ▶ Multi-user with access profiles.
- ▶ Smart programming.
- ▶ Units manuals and schematics.

kiconex service packages: we propose three service packages depending on the size of the installation to be controlled and the functions and features available.

			1	2
		Price list of payment methods	BASIC Prepaid subscription	PROFESSIONAL Prepaid subscription
ki2	1 up to 2 devices	Initial payment (€) Annual quota (€) *	840 252*	1 320 396*
ki8	3 up to 8 devices	Initial payment (€) Annual quota (€) *	1 320 396*	1 920 576*

* In the prepaid subscription method, first 3 years included in the initial payment. Consult price list for more devices.

Data log
Number of users/groups
Online update
Graphics
Alarm display
Alarm notification by email
Document storage
Data export
Diagrams

3 months

1

☑

☑

☑

☑

☑

☑

☑

1 year

3

☑

☑

☑

☑

200 MB

☑

☑

Note: 3G / 4G connectivity and alarm notification via SMS, consult price list.

kiconex modules

kiBox data acquisition module:

Connection to devices via ModBUS RTU protocol in RS485 network (2 wires) or TCP-IP. Connection to cloud server via Ethernet, 3G / 4G or Wifi modem.



kiwi wireless network module:



RS485 - Wifi link.

kiconex accessories

Wire 100 m 2 x 1 mm	198 €
kiconex board 350 x 300	440 €
kiconex board 400 x 400	495 €
Router WiFi / 3G / 4G	400 €
kiwi (kiconex Wireless)	180 €

Package dimensions

Series	Model	Standard packaging (road transport)						Reinforced packaging (marine transport)						
		Package dimensions (mm)			Package/s dimensions (mm)			Package dimensions (mm)			Package/s dimensions (mm)			
		Length	Width	Height	Length	Width	Height	Length	Width	Height	Length	Width	Height	
Monoblocks	intartop	CR - 0	860	665	640	-	-	-	900	705	700	-	-	-
		CR - 1	920	820	725	-	-	-	960	860	785	-	-	-
		CR - 2	980	920	810	-	-	-	1 020	960	870	-	-	-
		CR - 3	1 230	1 050	980	-	-	-	1 270	1 090	1 040	-	-	-
		CP - 0/1	1 070	940	590	-	-	-	1 110	980	650	-	-	-
	intarblock	CV - L - 0/1	620	435	990	-	-	-	660	475	1 050	-	-	-
		CV - L - 2	765	435	990	-	-	-	805	475	1 050	-	-	-
		CV - 0	600	450	840	-	-	-	640	490	900	-	-	-
		CV - 1	1 095	650	1 050	-	-	-	940	475	1 080	-	-	-
		CV - 2	1 095	650	1 050	-	-	-	940	690	1 110	-	-	-
		CV - 3	895	760	1 080	-	-	-	935	800	1 140	-	-	-
		CV - I - 1	900	430	1 195	-	-	-	940	470	1 255	-	-	-
		CV - I - 2	900	650	1 360	-	-	-	940	690	1 420	-	-	-
		CV - I - 3	890	760	1 390	-	-	-	930	800	1 450	-	-	-
Split systems	intarsplit	SH-N - 0/00	720	480	750	-	-	-	760	520	810	-	-	-
		SH-N - 1/11	805	510	820	-	-	-	845	550	880	-	-	-
		SH-N - 2/22	1 080	550	900	-	-	-	1 120	590	960	-	-	-
		SH-N - 3/33	1 035	670	700	1 790	595	400	1 075	710	760	1 830	635	460
		SH-N - 4/43/44	1 165	690	740	1 790	595	400	1 205	730	800	1 830	635	460
		SH-N - 44	1 165	690	740	2 170	650	440	1 205	730	800	2 210	690	500
		SH-Q - 30	1 035	670	700	930	650	770	1 075	710	760	970	690	830
		SH-Q - 40	1 165	690	740	930	650	770	1 205	730	800	970	690	830
		SH-Q - 41	1 165	690	740	1 270	650	740	1 205	730	800	1 310	690	800
		SH-Q - 42	1 165	690	740	1 660	650	740	1 205	730	800	1 700	690	800
		SH-Q - 52	1 475	815	820	1 660	650	740	1 515	855	880	1 700	690	800
		SH-Q - 53	1 475	815	820	1 970	650	740	1 515	855	880	2 010	690	800
		SH-Q - 54	1 475	815	820	2 670	650	840	1 515	855	880	2 710	690	900
		SH-D - 1/11	850	830	980	-	-	-	890	870	1 040	-	-	-
		SH-D - 2014 up to 2018	995	820	980	-	-	-	1 035	860	1 040	-	-	-
		SH-D - 2/22	995	820	1 220	-	-	-	1 035	860	1 280	-	-	-
		SH-D - 3/33	1 035	670	700	1 790	910	500	1 075	710	760	1 830	950	560
		SH-D - 4/43	1 165	690	740	1 790	910	500	1 205	730	800	1 830	950	560
		SH-D - 44	1 165	690	740	2 190	1 000	550	1 205	730	800	2 230	1 040	610
		SF-N - 0/00	730	500	835	-	-	-	770	540	895	-	-	-
		SF-N - 1/11/2/12	1 170	520	990	-	-	-	1 210	560	1 050	-	-	-
		SF-N - 3/13	1 160	445	730	1 790	595	400	1 200	485	790	-	-	-
		SF-N - 4/23	1 220	480	970	1 790	595	400	1 260	520	1 030	1 830	635	460
		SF-N - 24	1 220	480	970	2 170	650	440	1 260	520	1 030	2 210	690	500
		SF-N - 34	1 310	550	1 270	2 670	650	840	1 350	590	1 310	2 710	690	900
		SF-Q - 10	1 160	445	730	930	650	770	1 200	485	790	970	690	830
		SF-Q - 20	1 220	480	970	930	650	770	1 260	520	1 030	970	690	830
		SF-Q - 21	1 220	480	970	1 270	650	740	1 260	520	1 030	1 310	690	800
		SF-Q - 22	1 220	480	970	1 660	650	740	1 260	520	1 030	-	-	-
		SF-Q - 32	1 310	550	1 250	1 660	650	740	1 350	590	1 310	-	-	-
		SF-Q - 33	1 310	550	1 250	1 970	650	740	1 350	590	1 310	-	-	-
		SF-Q - 34	1 310	550	1 250	2 670	650	840	1 350	590	1 310	-	-	-
		SF-Q - 43	1 340	580	1 500	1 970	650	740	1 380	620	1 560	-	-	-
		SF-Q - 44	1 340	580	1 500	2 670	650	840	1 380	620	1 560	-	-	-
	SF-D - 1024 up to 1018/11	1 160	775	910	-	-	-	1 200	815	970	-	-	-	
	SF-D - 1024 up to 1034/12	1 160	750	1 220	-	-	-	1 200	790	1 280	-	-	-	
	SF-D - 1038/13	1 160	445	730	1 790	910	550	1 200	485	790	1 830	950	610	
	SF-D - 14	1 160	445	730	2 190	1 000	550	1 200	485	790	2 230	1 040	610	
	Special applications	SF-D - 2/23	1 220	480	970	1 790	910	500	1 260	520	1 030	1 830	950	560
		SF-D - 24	1 220	480	970	2 190	1 000	550	1 260	520	1 030	2 230	1 040	610
		SF-D - 3	1 310	550	1 250	1 790	910	500	1 350	590	1 310	1 830	950	560
		SF-D - 34	1 310	550	1 250	2 190	1 000	550	1 350	590	1 310	2 230	1 040	610
		SF-D - 4/44	1 340	580	1 500	2 190	1 000	550	1 380	620	1 560	2 230	1 040	610
		VSF / VSH - 0/00	870	700	800	-	-	-	910	740	860	-	-	-
		VSF / VSH - 10	1 160	750	800	-	-	-	1 200	790	860	-	-	-
		VSF / VSH - 11/1014	1 160	750	890	-	-	-	1 200	790	950	-	-	-
VSF / VSH - 12/1024/1034		1 160	750	1 220	-	-	-	1 200	790	1 280	-	-	-	
VSF / VSH - 2/23		1 220	480	970	1 790	975	395	1 260	520	1 030	1 830	1 015	455	
VSF / VSH - 3/33		1 310	550	1 250	1 790	975	395	1 350	590	1 310	1 830	1 015	455	
VSH - 4/43		1 340	580	1 500	-	-	-	1 380	620	1 560	-	-	-	

Series	Model	Standard packaging (road transport)						Reinforced packaging (marine transport)					
		Package dimensions (mm)			Package/s dimensions (mm)			Package dimensions (mm)			Package/s dimensions (mm)		
		Length	Width	Height	Length	Width	Height	Length	Width	Height	Length	Width	Height
Waterloop system	CC - 1	1 590	600	650	-	-	-	1 630	640	710	-	-	-
	CC - 2	1 890	600	680	-	-	-	1 930	640	740	-	-	-
	DM - 0	600	500	380	-	-	-	640	540	440	-	-	-
	DM - 1	1 000	420	680	-	-	-	1 040	460	740	-	-	-
	DM - 2	1 170	450	760	-	-	-	1 210	490	820	-	-	-
	CWF - 0 / 1	1 190	440	720	-	-	-	1 230	480	780	-	-	-
	CWF - 2	1 220	480	970	-	-	-	1 260	520	1 030	-	-	-
	CWF - 3	1 310	550	1 250	-	-	-	1 350	590	1 310	-	-	-
	CWF - 4	1 340	580	1 500	-	-	-	1 380	620	1 560	-	-	-
	CWF - 6	1 900	580	1 250	-	-	-	1 940	620	1 310	-	-	-
	CWF - 8	1 900	580	1 500	-	-	-	1 940	620	1 560	-	-	-
Condensing units	intarbox												
	DH - 0	700	460	475	-	-	-	740	405	535	-	-	-
	DH - 1	738	495	556	-	-	-	778	470	616	-	-	-
	DH - 2	973	495	640	-	-	-	1 013	506	700	-	-	-
	DH - 3	1 015	640	655	-	-	-	1 055	680	715	-	-	-
	DH - 4	1 145	670	725	-	-	-	1 185	710	785	-	-	-
	DH - 5	1 475	815	796	-	-	-	1 515	855	856	-	-	-
	DF - 0	730	365	562	-	-	-	770	405	622	-	-	-
	DF - 1	1 150	430	720	-	-	-	1 190	470	780	-	-	-
	DF - 2	1 200	466	970	-	-	-	1 240	506	1 030	-	-	-
	DF - 3	1 310	547	1 240	-	-	-	1 350	587	1 300	-	-	-
Siglus													

Sales terms

Except in case of agreement with INTARCON, the following general sales terms prevail.

Price

The prices indicated in this list, except for typographical errors, are retail prices with cash payment, do not include VAT or indirect taxes, and will remain in force during the period of validity of this catalogue or until a new edition.

Installation

The buyer admits that INTARCON's products are capital goods for integration in a refrigeration installation. To that effect, the buyer assumes obedience to any applicable law and to guarantee the quality of the installation, which, in any case, is to be done by an authorised installer.

Orders

The orders are to be placed in writing and to be confirmed by the seller through a pro forma invoice indicating the shipping date. The seller reserves the right to refuse an order. Once manufacturing has started, no cancellations will be accepted.

Packaging

Prices include standard packaging for road transport, not suitable for overseas transport.

Delivery

The delivery of INTARCON goods is according to FCA INTARCON (PI Los Santos, 14900 Lucena - Spain) according to Incoterms 2020 of the ICC. The only accepted delivery claims are those received in written on the delivering note within 24 hours from the delivery.

Refunds

No refunds will be accepted without prior authorisation from the manufacturer and, in any case, an amount no less than 10 % of the purchasing price will be deducted as a return cost.

Technical-features

The information and features in this catalogue are given as an indication, technical data can be changed with no prior communication, and should be confirmed when placing an order.

Warranty

The seller guarantees the product against any manufacturing default for 12 months from delivering date.

During the warranty period the manufacturer will cover the repair of the product in its facilities, the replacement of the product or the supply of spare parts for defective components, which is less burdensome and technically feasible. The cost and taxes on the refrigerant are expressly excluded from the warranty coverage when it has not been supplied by the manufacturer in hermetically sealed appliances. The warranty does not cover on-site labour for the replacement of the product or spare parts, nor the indirect damages or consequential losses that may be attributed to the malfunction of the product. Specifically, the manufacturer may not be responsible for the Tax on Fluorinated Gases stipulated in Law 16/2013, emitted into the atmosphere as a result of a leakage of a refrigeration unit subject to a tightness and resistance test by the refrigeration installer and a periodic leak control according to Regulations 517-2014 on F-Gas.

Payment

Unless agreement with the manufacturer, the payment of the invoices will be in cash. The seller of the goods reserves the right to block delivery of the orders in the case that any risk in payment is perceived.

Lawsuits

INTARCON's product trade is ruled by Spanish laws. Any conflict or argument is to be submitted to the judgment of the Córdoba Chamber of Commerce. In case of disagreement, both parties will relinquish to any jurisdiction to which may pertain and they will submit to the Court of Lucena (Córdoba) Spain.

2023 edition V250313

Rate effective from the 1st of February 2023 until new edition. Edited by INTARCON.

Total or partial reproduction of this catalogue is prohibited without the express authorization of the author.

www.intarcon.com



Industrias de Tecnologías Aplicadas de Refrigeración y Conservación, S.L.
CIF B14779136
Bulevar de Los Santos 34 | 14900 Lucena (Córdoba) - Spain
+ 34 957 50 92 93 | commercial@intarcon.com