

# DINTARCON



**CONDENSING UNITS  
UP TO 40 kW WITH A2L**

**LOW ENVIRONMENTAL IMPACT SOLUTIONS**

# A2L CONDENSING UNITS

## LOW ENVIRONMENTAL IMPACT SOLUTIONS


INTARCON's new range of **intarCUBE A2L** units, presented as the best low greenhouse effect solution for supermarkets and convenience stores. Due to their characteristics and the properties of the refrigerant, they are a long-term solution for refrigeration installations of up to 40 kW.

### A2L REFRIGERANT


Refrigerants classified as A2L combine low toxicity (class A) with slight flammability (2L), characterised by a reduced flame speed. These refrigerants have been developed as a low environmental impact solution, with a GWP typically below 150, in line with the restrictions imposed by environmental regulations such as the F-Gas Regulation.

Among their technical properties, working pressures similar to traditional HFCs stand out, facilitating their application in new systems or retrofit processes. Due to their low flammability, the use of A2L requires compliance with safety measures such as leak detection, adequate ventilation and a hermetic system design.

Therefore, A2L refrigerants represent an appropriate technical and regulatory solution for small and medium-sized installations, especially in commercial applications, where a transition to low GWP gases is required without compromising safety or performance.

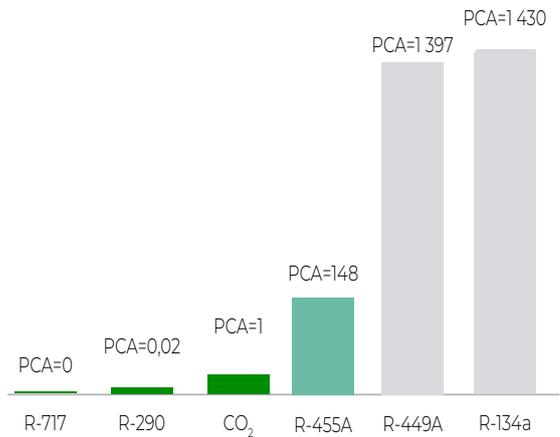

### SUPERMARKETS INSTALLATION EXAMPLE

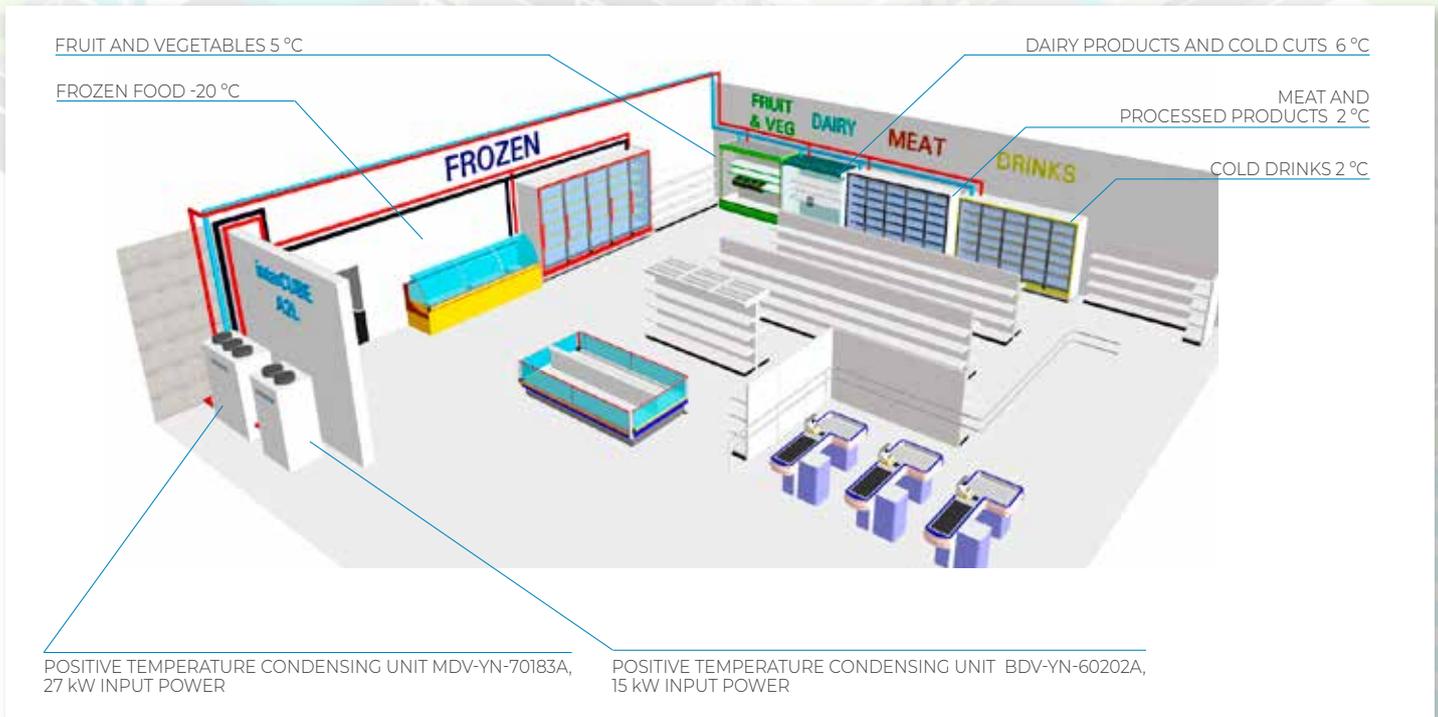

# A2L intarCUBE Scroll

The new **intarCUBE A2L condensing units** are designed to adapt to the real requirements of installations in convenience stores and supermarkets. Its compact and modular design allows easy integration even in small spaces, and can be installed outdoors or in a machine room, with its powered axial or radial version, offering great versatility in new or renovation projects.

A unit designed for energy efficiency, safety and ease of maintenance, with all components ready to work with A2L refrigerants.



## ELECTROMECHANICAL EMERGENCY MANOEUVRE

By adjustable pressure switches with manual or automatic activation in case of failure.



## PRESSURE GAUGES WITH SCALES

Pressure gauges with low dew pressure and liquid bubble indication for R-455A and R-454C.



## FREQUENCY CONVERTER

For INVERTER models, to modulate the capacity of the unit from 15% to 100%.



## ELECTRONIC AXIAL FANS

500 mm (7,000 m<sup>3</sup>/h) for optimised condensation. Optional radial 150 Pa or enhanced axial up to 80 Pa.



## ELECTRICAL PANEL AND CONTROL



Large and accessible, with independent circuit breakers and magnetic thermal switches for the compressor and fan.

Ventilation and thermostat inside the panel.

## ELECTRONIC OIL INJECTION

Electronic oil injection ensures precise lubrication of compressors, prevents failures, optimises efficiency and extends the service life of the system.



## HIGH EFFICIENCY COMPRESSORS

2 or 3 compressors in an insulated compartment, with rotalock valve included.



# A2L intarCUBE Scroll



Refrigeration condensing units, with scroll compressor, with axial condensation and compact construction, for positive and negative temperature. Designed for centralised commercial refrigeration applications up to 40 kW, compatible with low-GWP refrigerants R-455A and R-454C.


## FEATURES

Casing in pre-painted galvanized sheet, with acoustically insulated panels and service access covers.	<input checked="" type="checkbox"/>
Independent compressor compartment with ATEX extraction fans.	<input checked="" type="checkbox"/>
Scroll compressors acoustically insulated with soundproof cover.	<input checked="" type="checkbox"/>
Integrated safety valve in the boiler and in the low-pressure sector.	<input checked="" type="checkbox"/>
Liquid injection system for negative temperature.	<input checked="" type="checkbox"/>
Oil separator.	<input checked="" type="checkbox"/>
Aluminium microchannel condenser coil with Polyester Powder Coating treatment.	<input checked="" type="checkbox"/>
Axial EC fans.	<input checked="" type="checkbox"/>
Electrical panel independent of the frigorific compartment.	<input checked="" type="checkbox"/>
Pressure gauges with low dew pressure and liquid bubble indication.	<input checked="" type="checkbox"/>
Crankcase heater on all compressors.	<input checked="" type="checkbox"/>
Electromechanical emergency manoeuvre by adjustable pressure switches with manual or automatic activation in case of failure.	<input checked="" type="checkbox"/>
Differential, magnetic and thermal protection for compressor, fan, manoeuvre and auxiliary elements.	<input checked="" type="checkbox"/>
Solenoid permission.	<input checked="" type="checkbox"/>
High-performance axial fan, up to 80 Pa.	<input type="checkbox"/>
Radial EC fan with horizontal discharge, up to 150 Pa.	<input type="checkbox"/>
Radial EC fan with vertical discharge, up to 150 Pa.	<input type="checkbox"/>
Hot gas defrost.	<input type="checkbox"/>
Suction separator.	<input type="checkbox"/>
Copper microtube coil and aluminium fins.	<input type="checkbox"/>
Copper microtube coil and aluminium fins with polyurethane coating.	<input type="checkbox"/>
Copper microtube coil and aluminium fins with magnesium alloy.	<input type="checkbox"/>
Danfoss AK-PC 551 electronic regulation.	<input type="checkbox"/>
Supervision and control kiconex system with several configurations.	<input type="checkbox"/>
Stainless steel screws.	<input type="checkbox"/>

As standard  Optional

## Step-by-step operation

Preconfigured electronic controller for managing compressors in response to cooling demand using a neutral band.

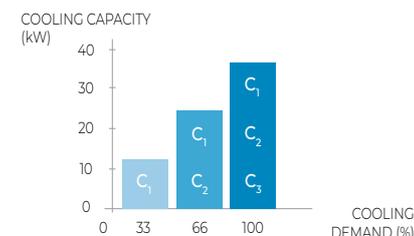

## Operating limits

	Min. value	Max. value
Outdoor temp.	-5 °C	45 °C
Evaporation temp. (PT)	-15 °C	0 °C
Evaporation temp. (NT)	-35 °C	-20 °C

## Plug & Play

INTARCON units are specifically designed and dimensioned for each R-455A or R-454C refrigerant.

They are delivered factory tested and adjusted with CE conformity certificate as a whole (pressure equipment, Ecodesign, etc.).

## Operational reliability

The duplication of components and back-up systems is an important design criterion. intarCUBE condensing units are equipped with two or more fans, tandem or trio compressors, and emergency operation.

## Accessories for DV units

- ▶ Spare electronic regulation.
- ▶ Non-return damper.
- ▶ Silentblock kit.

400V 3N ~ 50Hz | Positive temperature | Scroll compressor | R-455A

Refrigerant	Series / Model	Compressor (HP)	Cooling capacity (kW) <sup>(1)</sup> Average evaporating temperature				Input power (kW)	SEPR <sup>(2)</sup>	Max. current (A)	Condenser		Liq-Gas cooling connection	Weight (kg)	SPL dB(A) <sup>(3)</sup>
			-15 °C	-10 °C	-5 °C	0 °C				Fan Ø (mm)	Conden. air flow (m³/h)			
			R-455A											
	MDV-SN-60082A	2x 4	9.9	<b>12.3</b>	14.9	18.0	6.6	4.0	22.5	2x Ø500	14 000	1/2" - 1 1/8"	485	51
	MDV-SN-60142A	2x 7	16.2	<b>19.8</b>	23.8	28.7	10.1	4.2	32.9	2x Ø500	14 000	5/8" - 1 3/8"	500	51
	MDV-SN-70213A	3x 7	24.2	<b>29.7</b>	36.1	43.3	15.1	4.2	49.2	3x Ø500	21 000	5/8" - 1 5/8"	615	53

400V 3N ~ 50Hz | Negative temperature | Scroll compressor | R-455A

Refrigerant	Series / Model	Compressor (HP)	Cooling capacity (kW) <sup>(1)</sup> Average evaporating temperature			Input power (kW)	SEPR <sup>(2)</sup>	Max. current (A)	Condenser		Liq-Gas cooling connection	Weight (kg)	SPL dB(A) <sup>(3)</sup>
			-35 °C	-30 °C	-25 °C				Fan Ø (mm)	Conden. air flow (m³/h)			
			R-455A										
	BDV-SN-60202A	2x 10	10.6	<b>13.2</b>	16.4	13.7	15	40.1	2x Ø500	14 000	1/2" - 1 5/8"	510	56
	BDV-SN-70303A	3x 10	15.7	<b>19.7</b>	24.5	20.7	15	60.0	3x Ø500	21 000	5/8" - 2 1/8"	590	57


<sup>(1)</sup> Conditions according to UNE-EN 13215: Ambient temp. 35 °C, average evaporating temp. -10 °C (PT) and -30 °C (NT), SH=10 K.

<sup>(2)</sup> Seasonal Performance Factor (SEPR) according to Commission Regulation (EU) 2015/1095.


<sup>(3)</sup> Sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).

DIMENSIONS


6 series - axial

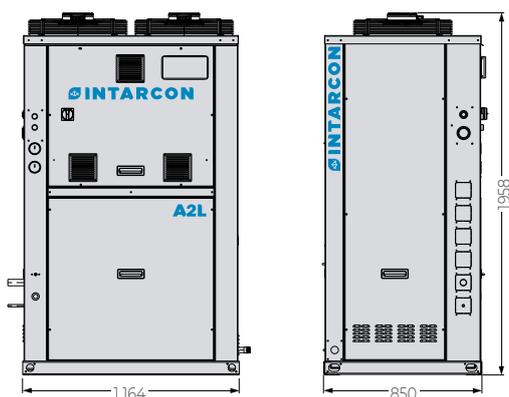


6 series - radial

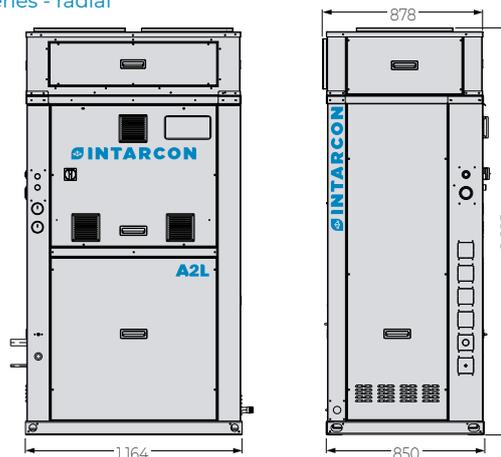

7 series - axial

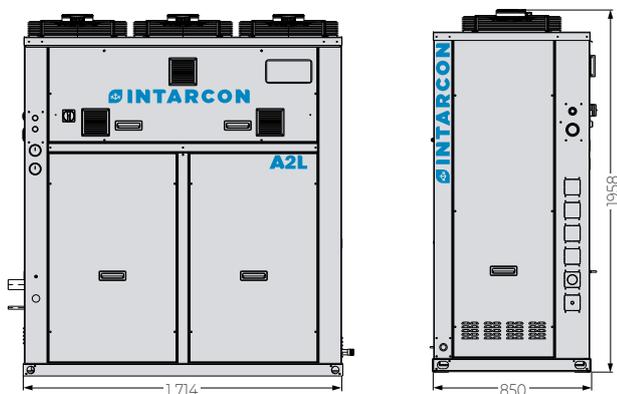

7 series - radial

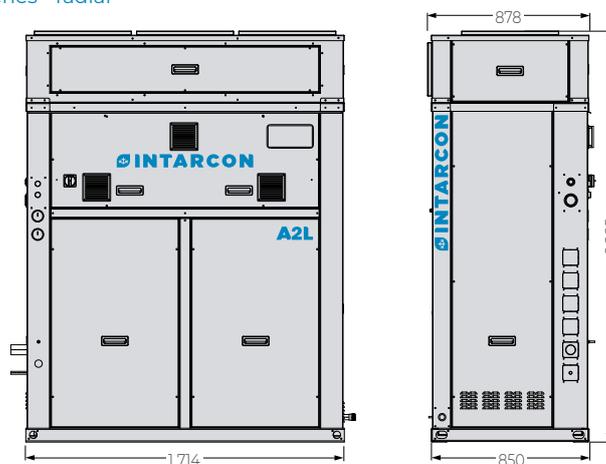

Dimensions in mm.

# A2L intarCUBE Scroll INVERTER



Refrigeration condensing units, with scroll compressor, one of them INVERTER, with axial condensation and compact construction, for positive and negative temperature. Designed for centralised commercial refrigeration applications up to 40 kW, compatible with low-GWP refrigerants R-455A and R-454C.

## FEATURES

Casing in pre-painted galvanized sheet, with acoustically insulated panels and service access covers.	<input checked="" type="checkbox"/>
Independent compressor compartment with ATEX extraction fans.	<input checked="" type="checkbox"/>
Scroll compressors, one of them INVERTER, acoustically insulated with soundproof cover.	<input checked="" type="checkbox"/>
Integrated safety valve in the boiler and in the low-pressure sector.	<input checked="" type="checkbox"/>
Liquid injection system for negative temperature.	<input checked="" type="checkbox"/>
Aluminium microchannel condenser coil with Polyester Powder Coating treatment.	<input checked="" type="checkbox"/>
Axial EC fans.	<input checked="" type="checkbox"/>
Electrical panel independent of the frigorific compartment.	<input checked="" type="checkbox"/>
Pressure gauges with low dew pressure and liquid bubble indication.	<input checked="" type="checkbox"/>
Crankcase heater on all compressors.	<input checked="" type="checkbox"/>
Oil separator.	<input checked="" type="checkbox"/>
Electronic oil injection system with tank.	<input checked="" type="checkbox"/>
Electromechanical emergency manoeuvre by adjustable pressure switches with manual or automatic activation in case of failure.	<input checked="" type="checkbox"/>
Differential, magnetic and thermal protection for compressor, fan, manoeuvre and auxiliary elements.	<input checked="" type="checkbox"/>
Solenoid permission.	<input checked="" type="checkbox"/>
High-performance axial fan, up to 80 Pa.	<input type="checkbox"/>
Radial EC fan with horizontal discharge, up to 150 Pa.	<input type="checkbox"/>
Radial EC fan with vertical discharge, up to 150 Pa.	<input type="checkbox"/>
Hot gas defrost.	<input type="checkbox"/>
Suction separator.	<input type="checkbox"/>
Copper microtube coil and aluminium fins.	<input type="checkbox"/>
Copper microtube coil and aluminium fins with polyurethane coating.	<input type="checkbox"/>
Copper microtube coil and aluminium fins with magnesium alloy.	<input type="checkbox"/>
Danfoss AK-PC 551 electronic regulation.	<input type="checkbox"/>
Supervision and control kiconex system with several configurations.	<input type="checkbox"/>
Stainless steel screws.	<input type="checkbox"/>


As standard  Optional

## INVERTER technology

Inverter control of the compressor allows progressive capacity modulation, without pulses or start-up cycles, to modulate the capacity of the condensing units from 15% to 100%.



The Inverter drive of one compressor is combined with the neutral band control of the other compressors to continuously adapt the cooling capacity to the demand.



## Operating limits

	Min. value	Max. value
Outdoor temp.	-5 °C	45 °C
Evaporation temp. (PT)	-15 °C	0 °C
Evaporation temp. (NT)	-35 °C	-20 °C

## Head pressure

Head pressure control by sequencing and varying fan speed, depending on load and ambient temperature, ensures that the condensing units operates at its optimum performance point.

## Accessories for DV units

- ▶ Spare electronic regulation.
- ▶ Non-return damper.
- ▶ Silentblock kit.

COOLING DETAIL



Electromechanical emergency manoeuvre

The electromechanical emergency manoeuvre included as standard in the intarCUBE A2L range allows the system to be controlled or stopped manually in the event of an electronic failure. Its main function is to ensure the safety of the refrigerated product.

High-pressure axial fan up to 80 Pa (optional)

The optional enhanced axial fan offers a pressure of up to 80 Pa, channelling hot condensation air and facilitating its transfer to the outside or to technical areas, especially in installations in machine rooms or enclosed spaces.

Radial EC fan (optional)

The optional electronic radial fan offers a pressure of 150 Pa, with the possibility of vertical or horizontal discharge.


400V 3N ~ 50Hz | Positive temperature | Scroll INVERTER compressor | R-455A

Refrigerant	Series / Model	Compressor (HP)	Cooling capacity (kW) <sup>(1)</sup> Average evaporating temperature				Input power (kW)	SEPR <sup>(2)</sup>	Max. current (A)	Condenser		Liq-Gas cooling connection	Weight (kg)	SPL dB(A) <sup>(3)</sup>
			-15 °C	-10 °C	-5 °C	0 °C				Fan Ø (mm)	Condens. air flow (m³/h)			
R-455A	MDV-YN-60112A	4 <sup>(1)</sup> + 7	14.1	<b>17.2</b>	20.9	24.9	8.3	4.4	27.7	2x Ø 500	14 000	1/2" - 1 1/8"	470	51
	MDV-YN-60142A	7 <sup>(1)</sup> + 7	17.6	<b>21.5</b>	26.0	31.2	10.1	4.4	32.9	2x Ø 500	14 000	5/8" - 1 3/8"	480	51
	MDV-YN-70183A	4 <sup>(1)</sup> + 2x 7	22.0	<b>27.1</b>	33.0	39.5	13.3	4.4	44.0	3x Ø 500	21 000	5/8" - 1 5/8"	580	53
	MDV-YN-70213A	7 <sup>(1)</sup> + 2x 7	25.7	<b>31.5</b>	38.2	45.8	15.1	4.5	49.2	3x Ø 500	21 000	5/8" - 1 5/8"	600	53
	MDV-YN-70223A	7 <sup>(1)</sup> + 2x 7.5	31.5	<b>38.5</b>	46.3	54.8	19.3	4.9	43.6	3x Ø 500	21 000	5/8" - 1 5/8"	638	52

400V 3N ~ 50Hz | Negative temperature | Scroll INVERTER compressor | R-455A

Refrigerant	Series / Model	Compressor (HP)	Cooling capacity (kW) <sup>(1)</sup> Average evaporating temperature			Input power (kW)	SEPR <sup>(2)</sup>	Max. current (A)	Condenser		Liq-Gas cooling connection	Weight (kg)	SPL dB(A) <sup>(3)</sup>
			-35 °C	-30 °C	-25 °C				Fan Ø (mm)	Condens. air flow (m³/h)			
R-455A	BDV-YN-60152A	5 <sup>(1)</sup> + 10	8.4	<b>10.7</b>	13.4	10.4	1.6	30.8	2x Ø 500	14 000	1/2" - 1 1/8"	425	55
	BDV-YN-60202A	10 <sup>(1)</sup> + 10	11.5	<b>14.4</b>	17.8	13.6	1.6	40.1	2x Ø 500	14 000	1/2" - 1 5/8"	445	56
	BDV-YN-70253A	5 <sup>(1)</sup> + 2x 10	13.6	<b>17.2</b>	21.5	17.3	1.7	50.8	3x Ø 500	21 000	5/8" - 2 1/8"	590	55
	BDV-YN-70303A	10 <sup>(1)</sup> + 2x 10	16.6	<b>20.9</b>	26.0	20.6	1.7	60.0	3x Ø 500	21 000	5/8" - 2 1/8"	649	57

MDV-YN-6 REFRIGERATION SCHEME

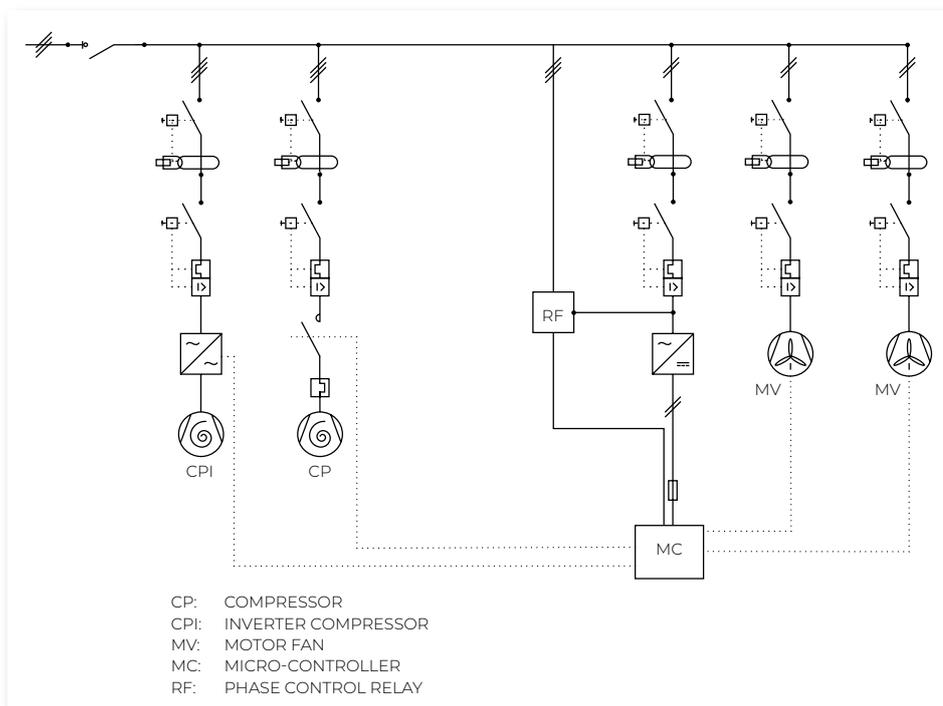

<sup>(1)</sup> Inverter compressor.

<sup>(2)</sup> Conditions according to UNE-EN 13215: Ambient temp. 35 °C, average evaporating temp. -10 °C (PT) and -30 °C (NT), SH=10 K.

<sup>(3)</sup> Seasonal Performance Factor (SEPR) according to Commission Regulation (EU) 2015/1095.

<sup>(4)</sup> Sound pressure level, with directivity 1, measured at 10 m from the unit (non-binding value calculated from sound power).



## Headquarters

Ctra. A-3132 km 15 - Apdo. Correos 410  
14900 Lucena (Córdoba), Spain  
+34 957 50 92 93

## International sales

commercial@intarcon.com

## Service

service@intarcon.com



[www.intarcon.com](http://www.intarcon.com)

